



Features

- Compact, with Low 5mm (.197") Profile
- Low Power Consumption (140mW)
- Standard Pin Spacing (0.1")
- PC Board Mount
- Surface Mount ("SM" Suffix)

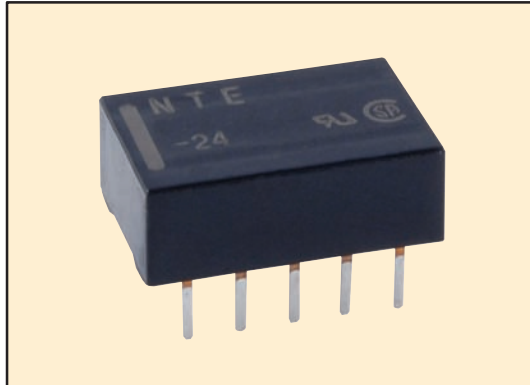

DPDT, 2 Form "C"
(Bottom View)




R74 Series




Subminiature, PC Mount, 1 Amp, DPDT Low Signal Relay.

D52

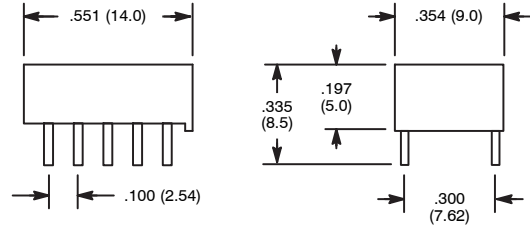

D53

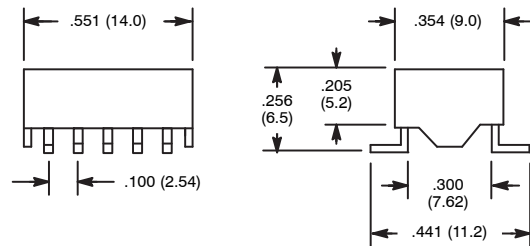

Electrical Specifications

Contact

Rating: 1 Amp
Material: Ag (Au clad)
Resistance: 50mΩ (Standard), 60mΩ (Surface Mount)

Coil

Coil Voltages: See Chart
Pick-up Voltages: 75% max of rated voltage
Drop-out Voltages: 10% min of rated voltage
Resistance: See Chart

Operational Characteristics

Timing Value: **Operate Time:** 3 mS max
Release Time: 2 mS max

Insulation Characteristics

Dielectric Strength

Between Contact and Coil: 1000 VAC
Between Contacts (Same Polarity): 1000 VAC
Between Contacts (Different Polarity): 750 VAC
Insulation Resistance: 1000MΩ

Environmental Characteristics

Operating: -40°C to +70°C (Standard),
-40°C to +85°C (Surface Mount)

Life

Mechanical: 36,000 operations/hour
Electrical: 1,800 operations/hour (under rated load)

Weight

Std: 0.05 oz (1.5 grams) approx.

DC OPERATED

NTE Type No.	Nom. Volt.	Contact Arr.	Coil Res. ±10% Ohms (Typ)	Approx. Nom. Power	Max. Contact Cur. @ 30VDC	Diag No.
R74-11D1-3	3VDC	DPDT	64.3	140mW	1A	D52
R74-11D1-3SM	3VDC	DPDT	64.3	140mW	1A	D53
R74-11D1-5	5VDC	DPDT	178	140mW	1A	D52
R74-11D1-5SM	5VDC	DPDT	178	140mW	1A	D53
R74-11D1-6	6VDC	DPDT	257	140mW	1A	D52
R74-11D1-6SM	6VDC	DPDT	257	140mW	1A	D53
R74-11D1-12	12VDC	DPDT	1,028	140mW	1A	D52
R74-11D1-12SM	12VDC	DPDT	1,028	140mW	1A	D53
R74-11D1-24	24VDC	DPDT	2,880	200mW	1A	D52
R74-11D1-24SM	24VDC	DPDT	2,880	200mW	1A	D53

ACCESSORIES

MOUNTING STYLES	DESCRIPTION	NTE TYPE NO.
PC MOUNT	10-PIN DIP	NTE409 (14-Pin DIP)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [NTE](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-3](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-](#)
[1423698-4](#) [6-1608051-6](#) [6-1608067-0](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-](#)
[1616359-9](#) [6-1616360-9](#) [6-1616931-6](#) [6-1617039-1](#) [6-1617052-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-](#)
[1617802-2](#) [6-1618107-9](#) [6-1618248-4](#) [M83536/1-027M](#) [CX-4014](#) [MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#)
[7-1393144-5](#) [7-1393767-8](#)