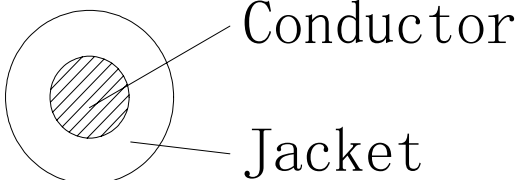


PAC

PTFE TYPE A Cable (22 AWG) Specification

19/0.15 SPC

Part No.:PTFE22A100

Cross Section	Performance														
	<p>Electrical Characteristics:</p> <p>Spark Test: AC-1.5KV Dielectric Strength : AC-300V/60sec Conductor Resistance: 60 OHM/KM At 20°C Insulation Resistance: DC-500V 10 Mohm/KM At 20°C</p>														
<p>Packing</p> <p>100M/reel</p>															
<p>Description</p> <p>Rated Temperature (°C) -75~190 Rated Voltage(V) 300 Product Standard Certification Flammability Test FT1</p>															
<p>Construction</p> <p>Conductor Silver plated copper AWG 22 Conductor Dia. (±0.005mm) 19/0.15</p> <p>Jacket PTFE Average Thickness(mm) 0.14 Outer Dia.(±0.05mm) 1.05</p>															
<p>Color</p> <p>As request</p>	<p>Mechanical Characteristics:</p> <table border="1"> <tr> <td>Test Object</td> <td>Jacket</td> </tr> <tr> <td>Test Material</td> <td>PTFE</td> </tr> <tr> <td>Before Tensile Strength (kgf/mm²)</td> <td>>=0.5</td> </tr> <tr> <td>Aging Elongation (%)</td> <td>>=100</td> </tr> <tr> <td>Aging Condition ()</td> <td></td> </tr> <tr> <td>After Tensile Strength (%)</td> <td>>=60</td> </tr> <tr> <td>Aging Elongation (%)</td> <td>>=60</td> </tr> </table>	Test Object	Jacket	Test Material	PTFE	Before Tensile Strength (kgf/mm ²)	>=0.5	Aging Elongation (%)	>=100	Aging Condition ()		After Tensile Strength (%)	>=60	Aging Elongation (%)	>=60
Test Object	Jacket														
Test Material	PTFE														
Before Tensile Strength (kgf/mm ²)	>=0.5														
Aging Elongation (%)	>=100														
Aging Condition ()															
After Tensile Strength (%)	>=60														
Aging Elongation (%)	>=60														
<p>Marking</p> <p>No</p>															
<p>Revision History</p>															

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [pan-asia](#) manufacturer:

Other Similar products are found below :

[Pan-Asia](#)