


## NEW PRODUCT INFORMATION

### New super-bright Through-hole & SMD-LEDs - 590nm yellow & 624nm reddish-orange

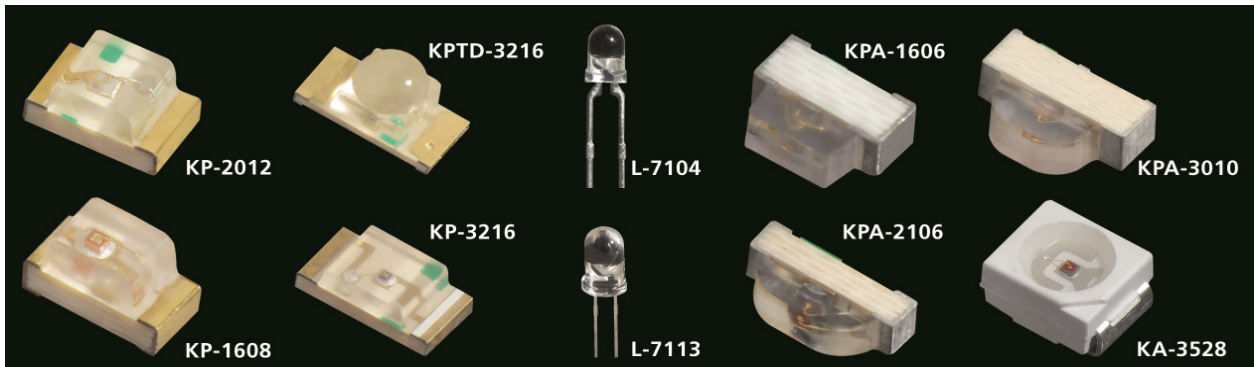

#### Features

- Low power consumption
- Forward voltage reddish-orange = typ. 2,2V - max. 2,8V
- Forward voltage yellow = typ. 2,0V - max. 2,5V
- RoHS compliant

Part number	Package	Dimensions	lv (mcd) @ 20mA		Viewing angle
			min.	typ.	
L-7104SYCK-J3	3mm	3mm Through-hole	1600	2600	34°
L-7113SYCK-J3	5mm	5mm Through-hole	4000	6000	20°
KP-1608SYCK-J3	0603	1,6 x 0,8 x 1,1 mm	200	320	120°
KPT-1608SYCK-J3	0603 Super Thin	1,6 x 0,8 x 0,75 mm	200	320	120°
KP-2012SYCK-J3	0805	2,0 x 1,25 x 1,1 mm	200	320	120°
KPT-2012SYCK-J3	0805 Super Thin	2,0 x 1,25 x 0,75 mm	200	320	120°
KP-3216SYCK-J3	1206	3,2 x 1,6 x 1,1 mm	200	320	120°
KPT-3216SYCK-J3	1206 Super Thin	3,2 x 1,6 x 0,75 mm	200	320	120°
KPTD-3216SYCK-J3	1206 Dome Lens	3,2 x 1,6 x 1,8 mm	1300	1700	35°
KA-3528SYCK-J3	PLCC-2	3,5 x 2,8 x 1,9 mm	200	450	120°
KPA-1606SYCK-J3	0602 Right Angle	1,6 x 0,6 x 1,2 mm	200	350	110°
KPA-2106SYCK-J3	0802 Right Angle	2,1 x 0,6 x 1,0 mm	200	350	120°
KPA-3010SYCK-J3	1104 Right Angle	3,0 x 1,0 x 2,0 mm	200	350	120°

Luminous intensity value is traceable to the CIE 120-2007 compliant national standards

Part number	Package	Dimensions	lv (mcd) @ 20mA		Viewing angle
			min.	typ.	
L-7104SECK-J3	3mm	3mm Through-hole	1000	1600	34°
L-7113SECK-J3	5mm	5mm Through-hole	3600	6000	20°
KP-1608SECK-J3	0603	1,6 x 0,8 x 1,1 mm	200	350	120°
KPT-1608SECK-J3	0603 Super Thin	1,6 x 0,8 x 0,75 mm	200	350	120°
KP-2012SECK-J3	0805	2,0 x 1,25 x 1,1 mm	200	350	120°
KPT-2012SECK-J3	0805 Super Thin	2,0 x 1,25 x 0,75 mm	200	350	120°
KP-3216SECK-J3	1206	3,2 x 1,6 x 1,1 mm	200	350	120°
KPT-3216SECK-J3	1206 Super Thin	3,2 x 1,6 x 0,75 mm	200	350	120°
KPTD-3216SECK-J3	1206 Dome Lens	3,2 x 1,6 x 1,8 mm	1600	2500	35°
KA-3528SECKT-J3	PLCC-2	3,5 x 2,8 x 1,9 mm	300	450	120°
KPA-1606SECK-J3	0602 Right Angle	1,6 x 0,6 x 1,2 mm	200	380	110°
KPA-2106SECK-J3	0802 Right Angle	2,1 x 0,6 x 1,0 mm	200	380	120°
KPA-3010SECK-J3	1104 Right Angle	3,0 x 1,0 x 2,0 mm	200	380	120°

Luminous intensity value is traceable to the CIE 120-2007 compliant national standards

## Kingbright

Head office in Germany:

Lindenau 7 / Gewerbegebiet  
D-47661 Issum  
Tel. +49 (2835) 4446-0  
Fax +49 (2835) 4446-29  
info@kingbright-europe.de

Branch office in France:

33 rue Benoit Malon  
F-92150 SURESNES  
Tel. +33 01.71.12.61.28  
Fax +33 01.71.12.61.36  
info@kingbright-europe.fr

[www.kingbright-europe.de](http://www.kingbright-europe.de)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard LEDs - Through Hole category](#):*

*Click to view products by [Kingbright manufacturer](#):*

Other Similar products are found below :

[LTL-10254W](#) [LTL-1214A](#) [LTL-1BEDJ](#) [LTL-2231AT](#) [LTL-3251A](#) [LTL-4262N](#) [LTL-5234](#) [LTL87HTBK](#) [LTL-87HD4B](#) [7383/V7C3-BSTA-L/PR3/MS](#) [HLMP-AG64-X10ZZ](#) [HLMP-EG1A-Z10DV](#) [HLMP-EL3B-WXKDD](#) [HLMP-HB74-UVBDD](#) [HLMP-HG65-VY0DD](#) [HLMP-HM74-34CDD](#) [HLMP-HM75-34CDD](#) [1L0532V23G0TD001](#) [NSPW500CS](#) [C4SMA-BGF-CQ34Q3C2](#) [L53GC13](#) [264-7SURTS530-A3](#) [L-C150JRCT](#) [S4SMS-BJF-CQ42QGF2](#) [S4SMS-GJF-CW12QMF2](#) [LD CQDP-1U3U-W5-1-K](#) [LO566UHR3-70G-A3](#) [SLA560WBD2PT3](#) [LP379PPG1C0G0300001](#) [SLR-322MCT32](#) [SLR-342DUT32](#) [SLR-342MC3F](#) [SLR343BC7TT32](#) [SLR343BCTT32](#) [SLX-LX3044GD](#) [SLX-LX3044ID](#) [SLX-LX3044YD](#) [1.90690.3330000](#) [SSL-LX20483ID](#) [SSL-LX3034YD](#) [SSL-LX5093LGT-11](#) [SSL-LX5093PGC](#) [SSL-LX5093SRC/F](#) [SSL-LX5093SYT](#) [SSL-LX509E3SIT](#) [SSL-LX509FT3ID](#) [SSL-LX50FT3GD](#) [SSS-LX4673ID-410B](#) [1L0532Y24I0TD001](#) [264-7SYGD/S530-E2](#)