

Type of contactor			LC1-D09...D18 DT20 & DT25	LC1-D25...D38 DT32...DT60	LC1-D40	LC1-D50...D95	LC1-D115 & LC1-D150
<b>Environment</b>							
Rated insulation voltage (Ui)	Conforming to EN 60947-4-1, overvoltage category III, degree of pollution: 3	V	690			1000	
	Conforming to UL, CSA	V	600				
Rated impulse withstand voltage (Uimp)	Conforming to EN 60947	kV	6			8	
Conforming to standards			IEC 947-1, 947-4-1, NFC 63-110, VDE 0660, BS 5424, JEM 1038, EN 60947-1, EN 60947-4-1. GL, DNV, PTB, RINA pending				
Product certifications			UL, CSA Complies with SNCF, Sichere Trennung recommendations				
Separation insulation	Conforming to VDE 0106 parts 101 and A1 (project 2/89)	V	400				
Degree of protection (1) (front face only)	Conforming to VDE 0106						
	Power connection		Protection against direct finger contact IP 2X				
	Coil connection		Protection against direct finger contact IP 2X (except LC1-D40...D80)				
Protective treatment	Conforming to IEC 68		"TH"				
Ambient air temperature around the device	Storage	°C	- 60...+ 80				
	Operation	°C	- 5...+ 60				
	Permissible	°C	- 40...+ 70, for operation at Uc				
Maximum operating altitude	Without derating	m	3000				
Operating position	Without derating		± 30° possible, in relation to normal vertical mounting plane				
Flame resistance	Conforming to UL 94		V 1				
	Conforming to IEC 695-2-1	°C	960				
Shock resistance (2) 1/2 sine wave = 11ms	Contacteur open	gn	10	8	8	8	6
	Contacteur closed	gn	15	15	10	10	15
Vibration resistance (2) 5...300 Hz	Contacteur open	gn	2				
	Contacteur closed	gn	4	4	4	3	4

(1) Protection ensured for the connection cross-sections shown on the next page and for connection via cable.

(2) In the least favourable direction, without change of contact state (coil supplied at Ue).

Type of contactor	LC1-	D09 & D12 DT20 & DT25	D18 (3P)	D25	D32	D38	D18 (4P) DT32...DT60	D40	D50 & D65	D80 & D95	D115 & D150
-------------------	------	-----------------------------	-------------	-----	-----	-----	-------------------------	-----	--------------	--------------	-------------

## Power circuit connections

### Connection via cable

Tightening		Screw clamps					2-input connector	Screw clamps	1-input connector	2-input connector
Flexible cable without cable end	1 conductor	mm <sup>2</sup> 1...4	1.5...6	1.5...10	2.5...10	2.5...16	2.5...25	2.5...25	4...50	10...120
	2 conductors	mm <sup>2</sup> 1...4	1.5...6	1.5...6	2.5...10	2.5...16	2.5...16	2.5...16	4...25	10...120 + 10...50
Flexible cable with cable end	1 conductor	mm <sup>2</sup> 1...4	1...6	1...6	1...10	2.5...10	2.5...25	2.5...25	4...50	10...120
	2 conductors	mm <sup>2</sup> 1...2.5	1...4	1...4	1.5...6	2.5...10	2.5...10	2.5...10	4...16	10...120 + 10...50
Solid cable without cable end	1 conductor	mm <sup>2</sup> 1...4	1.5...6	1.5...6	1.5...10	2.5...16	2.5...25	2.5...25	4...50	10...120
	2 conductors	mm <sup>2</sup> 1...4	1.5...6	1.5...6	2.5...10	2.5...16	2.5...16	2.5...16	4...25	10...120 + 10...50
Screwdriver	Phillips head	N° 2	N° 2	N° 2	N° 2	N° 2	–	–	–	–
	Ø flat screwdriver	Ø 6	Ø 6	Ø 6	Ø 6	Ø 6	Ø 6...Ø 8	Ø 6...Ø 8	Ø 6...Ø 8	–
6 sided key		–	–	–	–	–	–	–	4	4
Tightening torque	N.m	1.7	1.7	2.5	2.5	2.5	5	5	9	12

### Connection via spring terminals

Flexible cable without cable end	1 conductor	mm <sup>2</sup> 2.5	4	4	4	–	–	–	–	–
	2 conductors	mm <sup>2</sup> 2.5	4	4	4	–	–	–	–	–
		(4: DT25)					(10: DT32...DT60)			
		(4: DT25)								

### Connection via bars or lugs

Bar cross-section		–	–	–	–	–	–	–	3 x 16	5 x 25
Lug external Ø	mm	8	8	10	10	12	13	16	17	25
Ø of screw	mm	M3.5	M3.5	M4	M4	M5	M5	M6	M6	M8
Screwdriver	Phillips head	N° 2	N° 2	N° 2	N° 2	N° 2	N° 2	N° 3	–	–
	Ø flat screwdriver	Ø 6	Ø 6	Ø 6	Ø 6	Ø 6	Ø 8	Ø 8	Ø 8	–
Key for hexagonal headed screw		–	–	–	–	–	–	–	10	13
Tightening torque	N.m	1.7	1.7	2.5	2.5	2.5	6	6	8	14

## Control circuit connections

### Connection via cable (tightening via screw clamps)

Flexible cable without cable end	1 conductor	mm <sup>2</sup> 1...4	1...4	1...4	1...4	1...4	1...4	1...4	1...4	1...2.5
	2 conductors	mm <sup>2</sup> 1...4	1...4	1...4	1...4	1...4	1...4	1...4	1...4	1...2.5
Flexible cable with cable end	1 conductor	mm <sup>2</sup> 1...4	1...4	1...4	1...4	1...4	1...2.5	1...2.5	1...2.5	1...2.5
	2 conductors	mm <sup>2</sup> 1...2.5	1...2.5	1...2.5	1...2.5	1...2.5	1...2.5	1...2.5	1...2.5	1...2.5
Solid cable without cable end	1 conductor	mm <sup>2</sup> 1...4	1...4	1...4	1...4	1...4	1...4	1...4	1...4	1...2.5
	2 conductors	mm <sup>2</sup> 1...4	1...4	1...4	1...4	1...4	1...4	1...4	1...4	1...2.5
Screwdriver	Phillips head	N° 2	N° 2	N° 2	N° 2	N° 2	N° 2	N° 2	N° 2	N° 2
	Ø flat screwdriver	Ø 6	Ø 6	Ø 6	Ø 6	Ø 6	Ø 6	Ø 6	Ø 6	Ø 6
Tightening torque	N.m	1.7	1.7	1.7	1.7	1.7	1.2	1.2	1.2	1.2

### Connection via spring terminals

Flexible cable without cable end	1 conductor	mm <sup>2</sup> 2.5	2.5	2.5	2.5	–	–	–	–	–
	2 conductors	mm <sup>2</sup> 2.5	2.5	2.5	2.5	–	–	–	–	–

### Connection via bars or lugs

Lug external Ø	mm	(1)					8	8	8	8
Ø of screw	mm	(1)					M3.5	M3.5	M3.5	M3.5
Screwdriver	Phillips head	–	–	–	–	–	N° 2	N° 2	N° 2	N° 2
	Ø flat screwdriver	–	–	–	–	–	Ø 6	Ø 6	Ø 6	N°6
Tightening torque	N.m	–	–	–	–	–	1.2	1.2	1.2	1.2

(1) Spade connector or cable lug, see connection via cable above.

Type of contactor		LC1-	D09	DT20	D12	DT25	D18	DT32	D25	DT40
<b>Pole characteristics</b>										
<b>Rated operational current (Ie)</b> (Ue ≤ 440 V)	In AC-3, θ ≤ 60 °C	A	9		12		18		25	
	In AC-1, θ ≤ 60 °C	A	25	20	25		32		40	
<b>Rated operational voltage (Ue)</b>	Up to	V	690		690		690		690	
<b>Frequency limits</b>	Of the operating current	Hz	25...400		25...400		25...400		25...400	
<b>Conventional thermal current (Ith)</b>	θ ≤ 60 °C	A	25	20	25	25	32	32	40	40
<b>Rated making capacity (440 V)</b>	Conforming to IEC 947		250		250		300		450	
<b>Rated breaking capacity (440 V)</b>	Conforming to IEC 947		250		250		300		450	
<b>Permissible short-time rating</b> No current flowing for preceding 15 minutes at θ ≤ 40 °C	For 1 s	A	210		210		240		380	
	For 10 s	A	105		105		145		240	
	For 1 min	A	61		61		84		120	
	For 10 min	A	30		30		40		50	
<b>Protection by fuse</b> against short-circuits (U ≤ 690 V)	Without thermal overload relay, fuse gG	type 1	A	25	40		50		63	
		type 2	A	20	25		35		40	
	With thermal overload relay	A	See pages 2/52 and 2/53, for aM or gG fuse ratings corresponding to the associated thermal overload relay							
<b>Average impedance per pole</b>	At Ith and 50 Hz	mΩ	2.5		2.5		2.5		2	
<b>Power dissipation per pole</b> for the above operating currents	AC-3	W	0.20		0.36		0.8		1.25	
	AC-1	W	1.56		1.56		2.5		3.2	
<b>a.c. control circuit characteristics</b>										
<b>Rated control circuit voltage (Uc)</b>	50/60 Hz	V	12...690							
<b>Control voltage limits</b> 50 or 60 Hz coils	Operational		-							
		Drop-out	-							
	50/60 Hz coils	Operational	0.8...1.1 Uc on 50 Hz and 0.85...1.1 Uc on 60 Hz at 60 °C							
		Drop-out	0.3...0.6 Uc at 60 °C							
<b>Average consumption</b> at 20 °C and at Uc	~ 50 Hz	Inrush	50 Hz coil	VA	-					
			Cos φ		0.75					
		50/60 Hz coil	VA	70						
			Cos φ		0.3					
	Sealed	50 Hz coil	VA	-						
			Cos φ		0.3					
		50/60 Hz coil	VA	7						
			Cos φ		0.3					
~ 60 Hz	Inrush	60 Hz coil	VA	-						
		Cos φ		0.75						
	50/60 Hz coil	VA	70							
		Cos φ		0.3						
Sealed	60 Hz coil	VA	-							
		Cos φ		0.3						
	50/60 Hz coil	VA	7.5							
		Cos φ		0.3						
<b>Heat dissipation</b>	50/60 Hz	W	2...3							
<b>Operating time (3)</b>	Closing "C"	ms	12...22							
	Opening "O"	ms	4...19							
<b>Mechanical life</b> in millions of operating cycles	50 or 60 Hz coil		-							
	50/60 Hz coil on 50 Hz		15							
<b>Maximum operating rate</b> at ambient temperature ≤ 60 °C	In operating cycles per hour		3600							

(1) Protection ensured for the connection cross-sections shown on page 2/33 and for connection via cable.

(2) In the least favourable direction, without change of contact state (coil supplied at Ue).

(3) The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles. The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate.

D32	DT60	D38	D40	D50	D65	D80	D95	D115	D150
32	32	38	40	50	65	80	95	115	150
50	60	50	60	80	80	125	125	200	200
690	690	690	1000	1000	1000	1000	1000	1000	1000
25...400	25...400	25...400	25...400	25...400	25...400	25...400	25...400	25...400	25...400
50	60	50	60	80	80	125	125	200	200
550	500	550	800	900	1000	1100	1100	1260	1660
550	500	550	800	900	1000	1100	1100	1100	1400
430	430	430	720	810	900	990	1100	1100	1400
260	260	310	320	400	520	640	800	950	1200
138	138	150	165	208	260	320	400	550	580
60	60	60	72	84	110	135	135	250	250
63	63	63	80	100	160	200	200	250	315
63	63	63	80	100	125	160	160	200	250

See pages 2/52 and 2/53, for aM or gG fuse ratings corresponding to the associated thermal overload relay

2	2	2	1.5	1.5	1	0.8	0.8	0.6	0.6
2	2	3	2.4	3.7	4.2	5.1	7.2	7.9	13.5
5	5	5	5.4	9.6	6.4	12.5	12.5	24	24

12...690	24...660					24...500				
–	0.85...1.1 Uc at 55 °C					0.85...1.1 Uc at 55 °C				
–	0.3...0.6 Uc at 55 °C					0.3...0.5 Uc at 55 °C				
0.8...1.1 Uc on 50 Hz and 0.85...1.1 Uc on 60 Hz at 60 °C	0.8...1.1 Uc on 50 Hz and 0.85...1.1 Uc on 60 Hz at 55 °C					0.8...1.15 Uc on 50/60 Hz at 55 °C				
0.3...0.6 Uc at 60 °C	0.3...0.6 Uc at 55 °C					0.3...0.5 Uc at 55 °C				
–	200					300		–		
0.75	0.75					0.8		0.9		
70	245					280...350		280...350		
–	20					22		–		
0.3	0.3					0.3		0.9		
7	26					2...18		2...18		
–	220					300		–		
0.75	0.75					0.8		0.9		
70	245					280...350		280...350		
–	22					22		–		
0.3	0.3					0.3		0.9		
7.5	26					2...18		2...18		
2...3	6...10					3...8		3...4.5		
12...22	20...26		20...26		20...26		20...35		20...35	
4...19	8...12		8...12		8...12		6...20		6...20	
–	16		16		16		10		10	
15	6		6		6		4		4	
3600	3600		3600		3600		3600		2400	
									1200	

d.c. control circuit characteristics

Type of contactor			LC1-D09...D38 DT20...DT60	LC1- or LP1-D40...D65	LC1 or LP1-D80	LC1-D115 & LC1-D150	
Rated control circuit voltage (Uc)	---	V	12...440	12...440		24...440	
Rated insulation voltage	Conforming to IEC 947-1	V	690				
	Conforming to UL, CSA	V	600				
Control voltage limits	Operational	Standard coil	0.7...1.25 Uc at 60 °C	0.85...1.1 Uc at 55 °C		0.75...1.2 Uc at 55 °C	
		Wide range coil	–	0.75...1.2 Uc at 55 °C		–	
	Drop-out		0.1...0.25 Uc at 60 °C	0.1...0.3 Uc at 55 °C		0.15...0.4 Uc at 55 °C	
Average consumption at 20 °C and at Uc		Inrush	W	5.4	22	22	270 to 365
		Sealed	W	5.4	22	22	2.4...5.1
Average operating time (1) at Uc	Closing	"C"	ms	55	85...110	95...130	20...35
	Opening	"O"	ms	20	20...35	20...35	40...75
			<b>Note:</b> The arcing time depends on the circuit switched by the poles. For normal 3-phase applications, the arcing time is usually less than 10 ms. The load is isolated from the supply after a time equal to the sum of the opening time and the arcing time.				
Time constant (L/R)		ms	28	65	75	25	
Mechanical life at Uc	In millions of operating cycles		30	20	20	8	
Maximum operating rate at ambient temperature ≤ 60 °C	In operating cycles per hour		3600	3600	3600	1200	

Low consumption control circuit characteristics

Rated insulation voltage	Conforming to EN 60947-1	V	690			
	Conforming to UL, CSA	V	600			
Maximum voltage	Of the control circuit on ---		250			
Average consumption d.c. at 20 °C and at Uc	Wide range coil (0.7...1.25 Uc)	Inrush	W	2.4		
		Sealed	W	2.4		
Operating time (1) at Uc and at 20 °C	Closing	"C"	ms	70		
	Opening	"O"	ms	25		
Voltage limits (θ ≤ 60 °C) of the control circuit	Operational		0.7 to 1.25 Uc			
	Drop-out		0.1...0.3 Uc			
Time constant (L/R)		ms	40			
Mechanical life	In millions of operating cycles		30			
Maximum operating rate	At ambient temperature ≤ 60 °C	ops/h	3600			

(1) Operating times depend on the type of contactor electromagnet and its control mode.

The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles. The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate.



(2) In the least favourable direction, without change of contact state.

Contactor integral auxiliary contact characteristics

<b>Linked contacts conforming to draft standard IEC 947-4-5</b>	Each contactor has 2 N/O and N/C contacts mechanically linked on the same movable contact holder		
<b>Mirror contact</b>	The N/C contact on each contactor represents the state of the power contacts and can be connected to a PREVENTA safety module		
<b>Rated operational voltage (Ue)</b>	Up to	<b>V</b>	690
<b>Rated insulation voltage (Ui)</b>	Conforming to IEC 947-1	<b>V</b>	690
	Conforming to UL, CSA	<b>V</b>	600
<b>Conventional thermal current (Ith)</b>	For ambient temperature ≤ 60 °C	<b>A</b>	10
<b>Operating current frequency</b>		<b>Hz</b>	25...400
<b>Minimum switching capacity</b> $\lambda = 10^{-8}$	U min.	<b>V</b>	17
	I min.	<b>mA</b>	5
<b>Short-circuit protection</b>	Conforming to EN 60947-5-1		gG fuse: 10 A
<b>Rated making capacity</b>	Conforming to EN 60947-5-1, I rms	<b>A</b>	~: 140, ∴: 250
<b>Short-time rating</b>	Permissible for	1 s	<b>A</b> 100
		500 ms	<b>A</b> 120
		100 ms	<b>A</b> 140
<b>Insulation resistance</b>		<b>MΩ</b>	> 10
<b>Non-overlap time</b>	Guaranteed between N/C and N/O contacts	<b>ms</b>	1.5 on energisation and on de-energisation

<p><b>Contact operating power</b> conforming to EN 60947-5-1</p>	<p><b>a.c. supply categories AC-14 and AC-15</b> Electrical life (valid for up to 3600 operating cycles/hour) on an inductive load such as the coil of an electromagnet: making power (cos φ 0.7) = 10 times the power broken (cos φ 0.4).</p>	<p><b>d.c. supply category DC-13</b> Electrical life (valid for up to 1200 operating cycles/hour) on an inductive load such as the coil of an electromagnet, without economy resistor, the time constant increasing with the load.</p>
--	--	--

	<b>V</b>	<b>24</b>	<b>48</b>	<b>115</b>	<b>230</b>	<b>400</b>	<b>440</b>	<b>600</b>	<b>V</b>	<b>24</b>	<b>48</b>	<b>125</b>	<b>250</b>	<b>440</b>
1 million operating cycles	<b>VA</b>	60	120	280	560	960	1050	1440	<b>W</b>	96	76	76	76	44
3 million operating cycles	<b>VA</b>	16	32	80	160	280	300	420	<b>W</b>	48	38	38	32	–
10 million operating cycles	<b>VA</b>	4	8	20	40	70	80	100	<b>W</b>	14	12	12	–	–

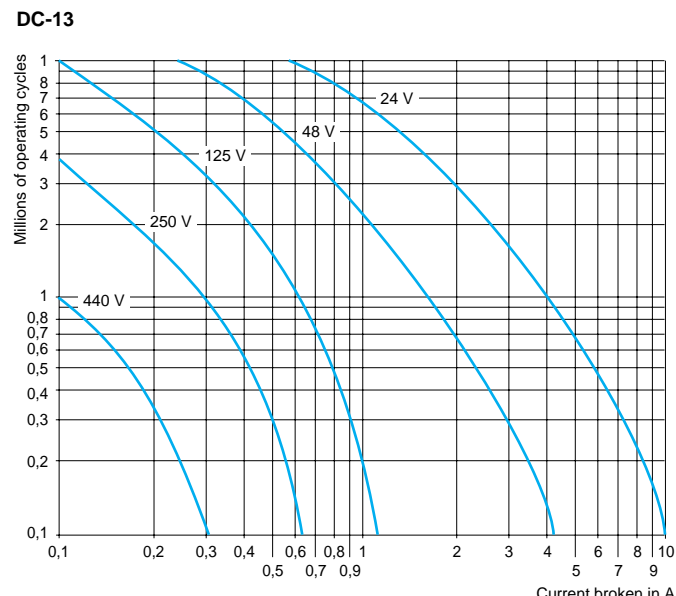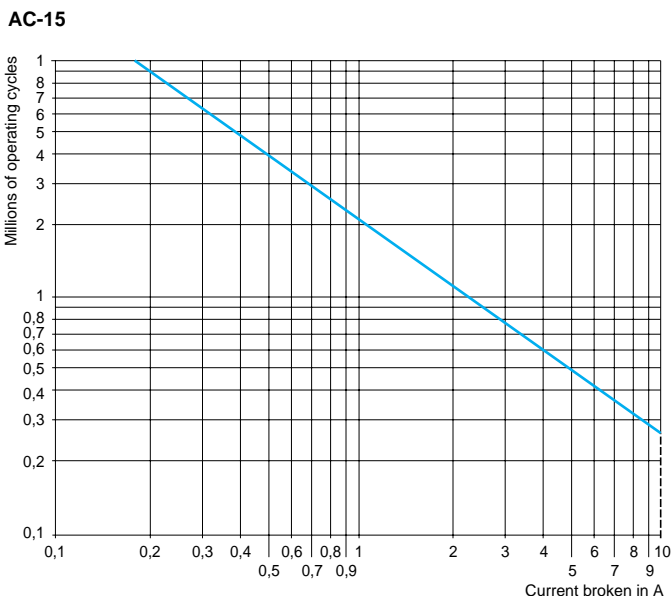

Selection: pages 1/6 to 1/35      References: pages 2/6 to 2/9      Dimensions: pages 2/44 to 2/47      Schemes: pages 2/48 and 2/49

# TeSys contactors

Auxiliary contact blocks without dust and damp protected contacts for model d contactors

Contact block type			LAD-N or C	LAD-T & S	LAD-R	LAD-8
<b>Environment</b>						
Conforming to standards			IEC 947-5-1, NF C 63-140, VDE 0660, EN 60947-5-1			
Product certifications			UL, CSA			
Protective treatment	Conforming to IEC 68		"TH"			
Degree of protection	Conforming to VDE 0106		Protection against direct finger contact IP 2X			
Ambient air temperature around the device	Storage	°C	- 60...+ 80			
	Operation	°C	- 5...+ 60			
	Permissible for operation at U <sub>c</sub>	°C	- 40...+ 70			
Maximum operating altitude	Without derating	m	3000			
Cabling	Phillips N° 2 and Ø 6 mm Flexible or solid cable with or without cable end	mm <sup>2</sup>	Min.: 1 x 1; max.: 2 x 2.5			
Connection by spring terminals	Flexible or solid cable without cable end	mm <sup>2</sup>	Max.: 2 x 2.5			

## Instantaneous and time delay contact characteristics

Number of contacts			1, 2 or 4	2	2	2
Rated operational voltage (U <sub>e</sub> )	Up to	V	690			
Rated insulation voltage (U <sub>i</sub> )	Conforming to EN 60947-5-1	V	690			
	Conforming to UL, CSA	V	600			
Conventional thermal current (I <sub>th</sub> )	For ambient temperature ≤ 60 °C	A	10			
Frequency of operational current		Hz	25...400			
Minimum switching capacity	U min.	V	17			
	I min.	mA	5			
Short-circuit protection	Conforming to EN 60947-5-1 and VDE 0660. gG fuse	A	10			
Rated making capacity	Conforming to EN 60947-5-1, I rms	A	~: 140; ---: 250			
Short-time rating	Permissible for: 1 s	A	100			
	500 ms	A	120			
	100 ms	A	140			
Insulation resistance		MΩ	> 10			
Non-overlap time	Guaranteed between N/C and N/O contacts	ms	1.5 (on energisation and on de-energisation)			
Overlap time	Guaranteed between N/C and N/O on LAD-C22	ms	1.5	–	–	–
Time delay (LAD-T, R and S contact blocks) Accuracy only valid for setting range indicated on the front face	Ambient air temperature for operation	°C	–	- 40...+ 70	- 40...+ 70	–
	Repeat accuracy		–	± 2 %	± 2 %	–
	Drift up to 0.5 million operating cycles		–	+ 15 %	+ 15 %	–
	Drift depending on ambient air temperature		–	0.25 % per °C	0.25 % per °C	–
Mechanical durability	In millions of operating cycles		30	5	5	30
Operational power of contacts			See page 2/40			

# TeSys contactors

Auxiliary contact blocks with dust and damp protected contacts for model d contactors

Contact block type			LA1-DX		LA1-DY	
			LA1-DX protected	non protected		
<b>Environment</b>						
Conforming to standards			IEC 947-5-1, VDE 0660			
Product certifications			UL, CSA			
Protective treatment	Conforming to IEC 68		"TH"			
Degree of protection	Conforming to VDE 0106		Protection against direct finger contact IP 2X			
Ambient air temperature	Storage and operation	°C	- 25...+ 70			
Cabling	Phillips N° 2 and Ø 6 mm Flexible or solid cable with or without cable end	mm <sup>2</sup>	Min.: 1 x 1 Max.: 2 x 2.5			
Number of contacts			2	2	2	2
<b>Contact characteristics</b>						
Rated operational voltage (Ue)	Up to	V	50	50	690	24
Rated insulation voltage (Ui)	Conforming to IEC 947-5-1	V	250	250	690	250
	Conforming to UL, CSA	V	–	–	600	–
Conventional thermal current (Ith)	For ambient temperature ≤ 40 °C	A	–	–	10	–
Maximum operational current (Ie)		mA	50	50	10	50
Frequency of operational current		Hz	–	–	25...400	–
Minimum switching capacity	U min.	V	3	3	17	3
	I min.	mA	0.3	0.3	5	0.3
Short-circuit protection	Conforming to EN 60947-5-1, gG fuse	A	–	–	10	–
Rated making capacity	Conforming to EN 60947-5-1, I rms	A	–	–	~: 140; ---: 250	–
Short-time rating	Permissible for: 1 s	A	–	–	100	–
	500 ms	A	–	–	120	–
	100 ms	A	–	–	140	–
Insulation resistance		MΩ	> 10	> 10	> 10	> 10
Mechanical durability	In millions of operating cycles		5	5	30	5
Materials and technology used for dust and damp protected contacts			Gold - Single break with crossed bars	Gold - Single break with crossed bars	–	Gold - Single break with crossed bars



# TeSys contactors


Auxiliary contact blocks with dust and damp protected contacts for model d contactors

## Operational power of contacts (conforming to EN 60947-5-1)

### a.c. supply, categories AC-14 and AC-15

Electrical durability (valid up to 3600 operating cycles/hour) on an inductive load such as the coil of an electromagnet: making power ( $\cos \varphi 0.7$ ) = 10 times the power broken ( $\cos \varphi 0.4$ ).


	V	24	48	115	230	400	440	600
1 million operating cycles	VA	60	120	280	560	960	1050	1440
3 million operating cycles	VA	16	32	80	160	280	300	420
10 million operating cycles	VA	4	8	20	40	70	80	100

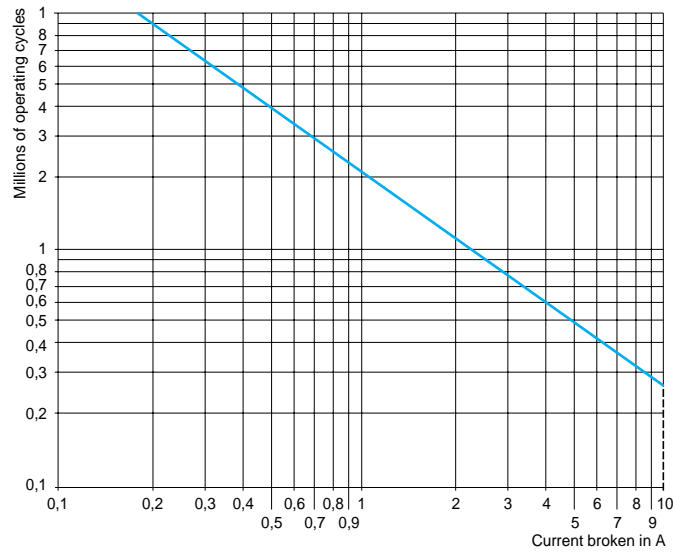

### d.c. supply, category DC-13

Electrical durability (valid up to 1200 operating cycles/hour) on an inductive load such as the coil of an electromagnet, without economy resistor, the time constant increasing with the power.

	V	24	48	125	250	440
1 million operating cycles	W	120	90	75	68	61
3 million operating cycles	W	70	50	38	33	28
10 million operating cycles	W	25	18	14	12	10

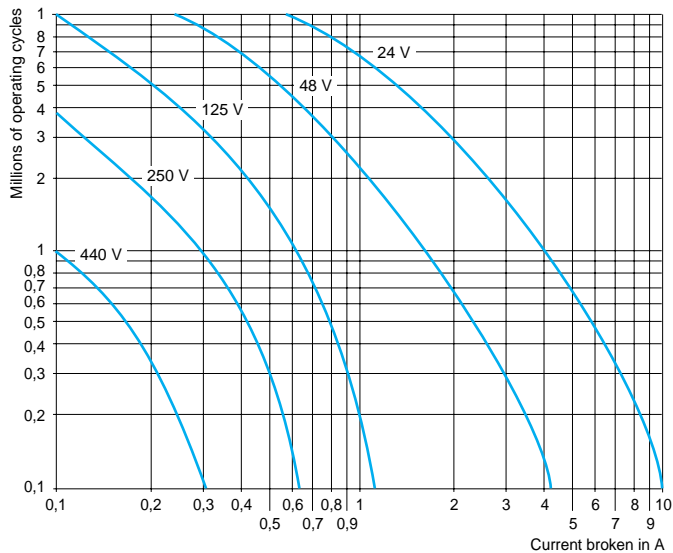

## Environment

<b>Conforming to standards</b>			IEC 947-5-1
<b>Product certifications</b>			UL, CSA
<b>Protective treatment</b>	Conforming to IEC 68		"TH"
<b>Degree of protection</b>	Conforming to VDE 0106		Protection against direct finger contact IP 2X
<b>Ambient air temperature around the device</b>	Storage	°C	- 40...+ 80
	Operation	°C	- 25...+ 55
	Permissible for operation at Uc	°C	- 25...+ 70

## "Auto - Man - Stop" control modules

<b>Recommendation</b>	The Auto - Man selector switch must only be operated with the Start - Stop ("O" "I") switch in position "O"		
<b>Rated insulation voltage</b>	Conforming to EN 60947-5-1	<b>V</b>	250
<b>Rated operational voltage</b>	Conforming to EN 60947-5-1	<b>V</b>	250
<b>Protection</b>	Against electric shocks	<b>kV</b>	2
<b>Built-in protection</b>	Contacteur coil suppression		By varistor
<b>Indication</b>	By integral LED		Illuminates when the contactor coil is energised
<b>Electrical durability</b>	In operating cycles		20,000

## Coil suppressor modules

Module type			LA4-DA LAD-4RC	LA4-DB LAD-4T	LA4-DC	LA4-DE LAD-4V
<b>Type of protection</b>			RC circuit	Bidirectional peak limiting diode	Diode	Varistor
<b>Rated control circuit voltage (Uc)</b>		<b>V</b>	~ 24...415	~ or --- 24...72	--- 12...250	~ or --- 24...250
<b>Maximum peak voltage</b>			3 Uc	2 Uc	Uc	2 Uc
<b>Natural RC frequency</b>	24/48 V	<b>Hz</b>	400	–	–	–
	50/127 V	<b>Hz</b>	200	–	–	–
	110/240 V	<b>Hz</b>	100	–	–	–
	380/415 V	<b>Hz</b>	150	–	–	–

## Mechanical latch blocks

Mechanical latch block type For mounting on contactor			LA6-DK10 LC1D40...D65, LP1-D65	LAD-6K10 LC1-D09...D38, DT20...DT60	LA6-DK20 LC1-D80...D150 LP1-D80 and LC1-D115
<b>Certification</b>			UL, CSA		UL, CSA
<b>Rated insulation voltage</b>	Conforming to IEC 947-5-1	<b>V</b>	690		690
<b>Rated control circuit voltage</b>	~ 50/60 Hz and ---	<b>V</b>	24...415		24...415
<b>Power required</b>	For unlatching	~	<b>VA</b>		25
		---	<b>W</b>		30
<b>Maximum operating rate</b>	In operating cycles/hour		1200		1200
<b>On-load factor</b>			10 %		10 %
<b>Mechanical durability at Uc</b>	In millions of operating cycles		0.5		0.5

Unlatching can be manually operated locally or electrically controlled for remote operation. The LA6-DK or LAD-6K latch coil and the LC1-D operating coil must not be energised simultaneously. The duration of the LA6-DK or LAD-6K and LC1-D control signals must be ≥ 100 ms.

Module type			LA4-DT (On-delay)	LA4-DR (Off-delay) for LC1-D
<b>Environment</b>				
Conforming to standards			IEC 255-5	
Product certifications			UL, CSA	
Protective treatment	Conforming to IEC 68		"TH"	
Degree of protection	Conforming to VDE 0106		Protection against direct finger contact IP 2X	
Ambient air temperature around the device	Storage	°C	- 40...+ 80	
	Operation	°C	- 25...+ 55	
	For operation at U <sub>c</sub>	°C	- 25...+ 70	
Rated insulation voltage (U <sub>i</sub> )	Conforming to EN 60947-5-1	V	250	
Cabling	Phillips N° 2 and Ø 6 mm Flexible or solid cable with or without cable end	mm <sup>2</sup>	Min.: 1 x 1	
			Max.: 2 x 2.5	

## Control circuit characteristics

Built-in protection	On input		By varistor	By varistor
	Suppression of contactor		By varistor	By bidirectional peak limiting diode
Rated control circuit voltage (U <sub>c</sub> )		V	~ or = 24...250	~ 24...250
Permissible variation			0.8...1.1 U <sub>c</sub>	0.8...1.1 U <sub>c</sub>
Type of control			By mechanical contact only	By mechanical contact only, connecting cable < 10 m

## Time delay characteristics


Timing ranges		s	0.1...2; 1.5...30; 25...500	0.1...2; 1.5...30; 25...500
Repeat accuracy	0...40 °C		± 3 % (10 ms minimum)	± 3 % (10 ms minimum)
Reset time	During the time delay period	ms	150	225
	After the time delay period	ms	50	–
Immunity to micro-breaks	During the time delay period	ms	10	20
	After the time delay period	ms	2	–
Minimum control pulse duration		ms	–	40
Indication of time delay	By LED		Illuminates during time delay period	Illuminates during time delay period

## Switching characteristics (solid state type)


Maximum power dissipated		W	2	3.5
Leakage current		mA	< 5	< 5
Residual voltage		V	3.3	3.3
Overvoltage protection			3 kV; 0.5 joule	3 kV; 0.5 joule
Electrical durability	In millions of operating cycles		30	30

## Operating diagrams

### LA4-DT "On-delay" electronic timers

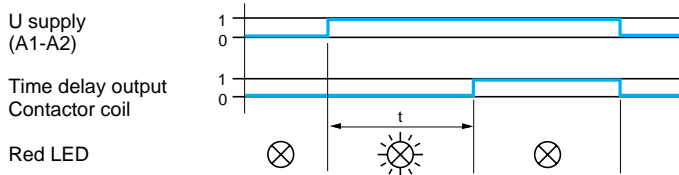

### LA4-DR "Off-delay" electronic timers

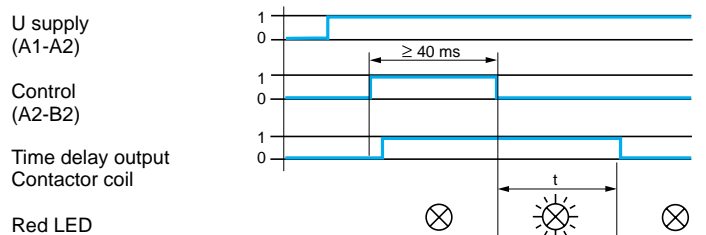

## Environment

<b>Conforming to standards</b>			IEC 255-5
<b>Product certifications</b>			UL, CSA
<b>Protective treatment</b>	Conforming to IEC 68		"TH"
<b>Degree of protection</b>	Conforming to VDE 0106		Protection against direct finger contact IP 2X
<b>Ambient air temperature around the device</b>	Storage	°C	- 40...+ 80
	Operation	°C	- 25...+ 55
	Permissible for operation at U <sub>c</sub>	°C	- 25...+ 70

## Other characteristics

Module type			LA4-DFBQ	LA4-DFB	LA4-DFE	LA4-DLB	LA4-DLE	LA4-DWB	
			With relay	With relay	With relay	With relay + override		Solid state	
<b>Rated insulation voltage</b>	Conforming to EN 60947-5-1	V	5	250					
<b>Rated operational voltage</b>	Conforming to EN 60947-5-1	V	415	250					
<b>Indication of input state</b>	By integral LED which illuminates when the contactor coil is energised								
<b>Input signals</b>	Control voltage (E1-E2)	V	~ 24	~ 24	~ 48	~ 24	~ 48	~ 24	
	Permissible variation	V	17...30	17...30	33...60	17...30	33...60	5...30	
	Current consumption at 20 °C	mA	25	25	15	25	15	8.5 for 5 V 15 for 24 V	
	State "0" guaranteed for	U	V	< 2.4	< 2.4	< 4.8	< 2.4	< 4.8	< 2.4
		I	mA	< 2	< 2	< 1.3	< 2	< 1.3	< 2
State "1" guaranteed for	U	V	17	17	33	17	33	5	
<b>Built-in protection</b>	Against reverse polarity		By diode						
	Of the input		By diode						
<b>Electrical durability at 220/240 V</b>	In millions of operating cycles		3	10	10	3	3	20	
<b>Maximum immunity time to micro-breaks</b>		ms	4	4	4	4	4	1	
<b>Power dissipated</b>	At 20 °C	W	0.6	0.6	0.6	0.6	0.6	0.4	
<b>Direct mounting without contactor</b>	With coil: ~ 24...250 V		–	LC1-D40...D150				–	
	~ 100...250 V		–	–				LC1-D40...D115	
	~ 380...415 V		LC1-D40...D150	–				–	
<b>Mounting with cabling adaptor LAD-4BB</b>	With coil: ~ 24...250 V		–	LC1-D09...D38, DT20...DT60				LC1-D09...D38, DT20...DT60	
	~ 380...415 V		LC1-D09...D38, DT20...DT60	–				–	
<b>Total operating time at U<sub>c</sub> (of the contactor)</b>	Operating times depend on the type of contactor electromagnet and its control mode. The closing time "C" is measured from the moment the coil supply is switched on to initial contact of the main poles. The opening time "O" is measured from the moment the coil supply is switched off to the moment the main poles separate.								
				LC1-D09...D38, DT20...DT60		LC1-D40...D65		LC1-D80 and D95	
	With LA4-DF, DL	N/O	ms	20...30		28...34		28...43	
	N/C	ms	16...24		20...24		18...32		
<b>Cabling</b>	Phillips N° 2 and Ø 6 mm	mm <sup>2</sup>	Min.: 1 x 1						
	Flexible or solid cable with or without cable end		mm <sup>2</sup> Min.: 2 x 2.5						

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Solid State Relays - Industrial Mount](#) category:*

*Click to view products by [Schneider](#) manufacturer:*

Other Similar products are found below :

[6225XXASRS-DC3](#) [D2440-C](#) [H10CA4890](#) [D4875C](#) [D53TP50DH-10](#) [1395831-1](#) [1616010-6](#) [BR312BY](#) [A-1326](#) [AQY210SXE01](#)  
[AQY221N2SYD01](#) [AQY414SXE01](#) [26532764](#) [H10CA4850](#) [H12CA4890VL](#) [RA2410-D06](#) [D1202F](#) [D53TP50-10](#) [W230E-1-12](#) [W230T-3-](#)  
[12](#) [W6125ASX-1](#) [W6225DSX-2](#) [W6240DSX-4](#) [W6240DTX-2](#) [1-1617030-3](#) [1-1617033-9](#) [1-1617033-7](#) [MS2-D2420](#) [MS2-D2430](#) [A-1440](#)  
[4-1617080-0](#) [RJ1P60V50E](#) [RN1F48I50](#) [70.362.1028.0](#) [7-1393030-8](#) [Z5.509.0828.0](#) [W230E-2-5](#) [G3RV-SR700-D](#) [AC110](#) [G3RV-SR500-AL](#)  
[AC100](#) [G3RV-SR500-D](#) [ACDC24](#) [G3RV-SR500-AL](#) [ACDC24](#) [G3RV-SR700-D](#) [ACDC24](#) [G3RV-SR700-AL](#) [ACDC24](#) [G3RV-SR500-D](#)  
[DC12](#) [G3RV-SR700-A](#) [ACDC24](#) [G3RV-SR500-A](#) [ACDC24](#) [2912138](#) [2912141](#) [SSRDAC10](#) [1613353](#)