


## SPECIFICATIONS

(Typical values for batteries stored at 20 °C for one year)




Nominal Capacity (At 2 mA/20 °C/68 °F/2.0V Cut-Off)	2.4 Ah
Open Circuit Voltage (At 20 °C/68 °F)	3.67 V
Nominal Voltage (At 2mA/20 °C/68 °F)	3.6 V
Maximum Continuous Current	100 mA
Maximum Pulse Current Capability	200 mA
Operating Temperature Range	-55 ~ 85 °C
Weight	17.0 g (0.60 oz)
Anode Surface Area	14 cm <sup>2</sup>
Volume	8.0 cm <sup>3</sup>
Diameter (Max)	14.5 mm
Height (Max)	50.5 mm

DIMENSIONS IN MM

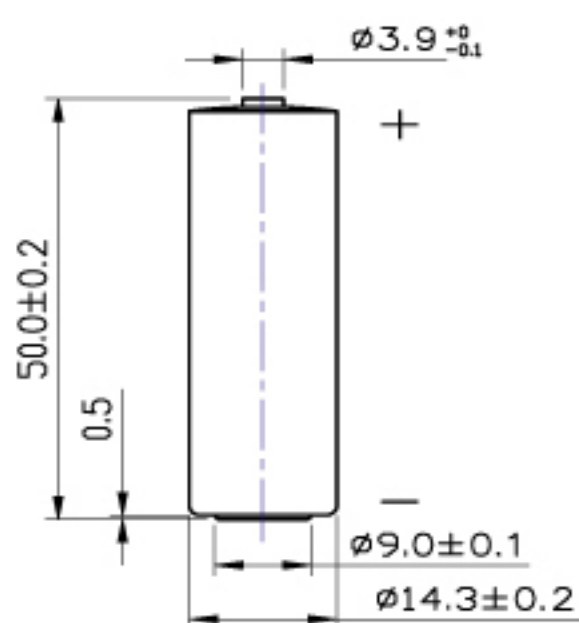


**WARNING**  
 Fire, Explosion And Severe Burn Hazard.  
 Do Not Recharge, Crush, Disassemble,  
 Heat Above 212°F(100°C), Incinerate  
 Or Expose Contents To Water


DISCHARGE CHARACTERISTICS AT +20°C

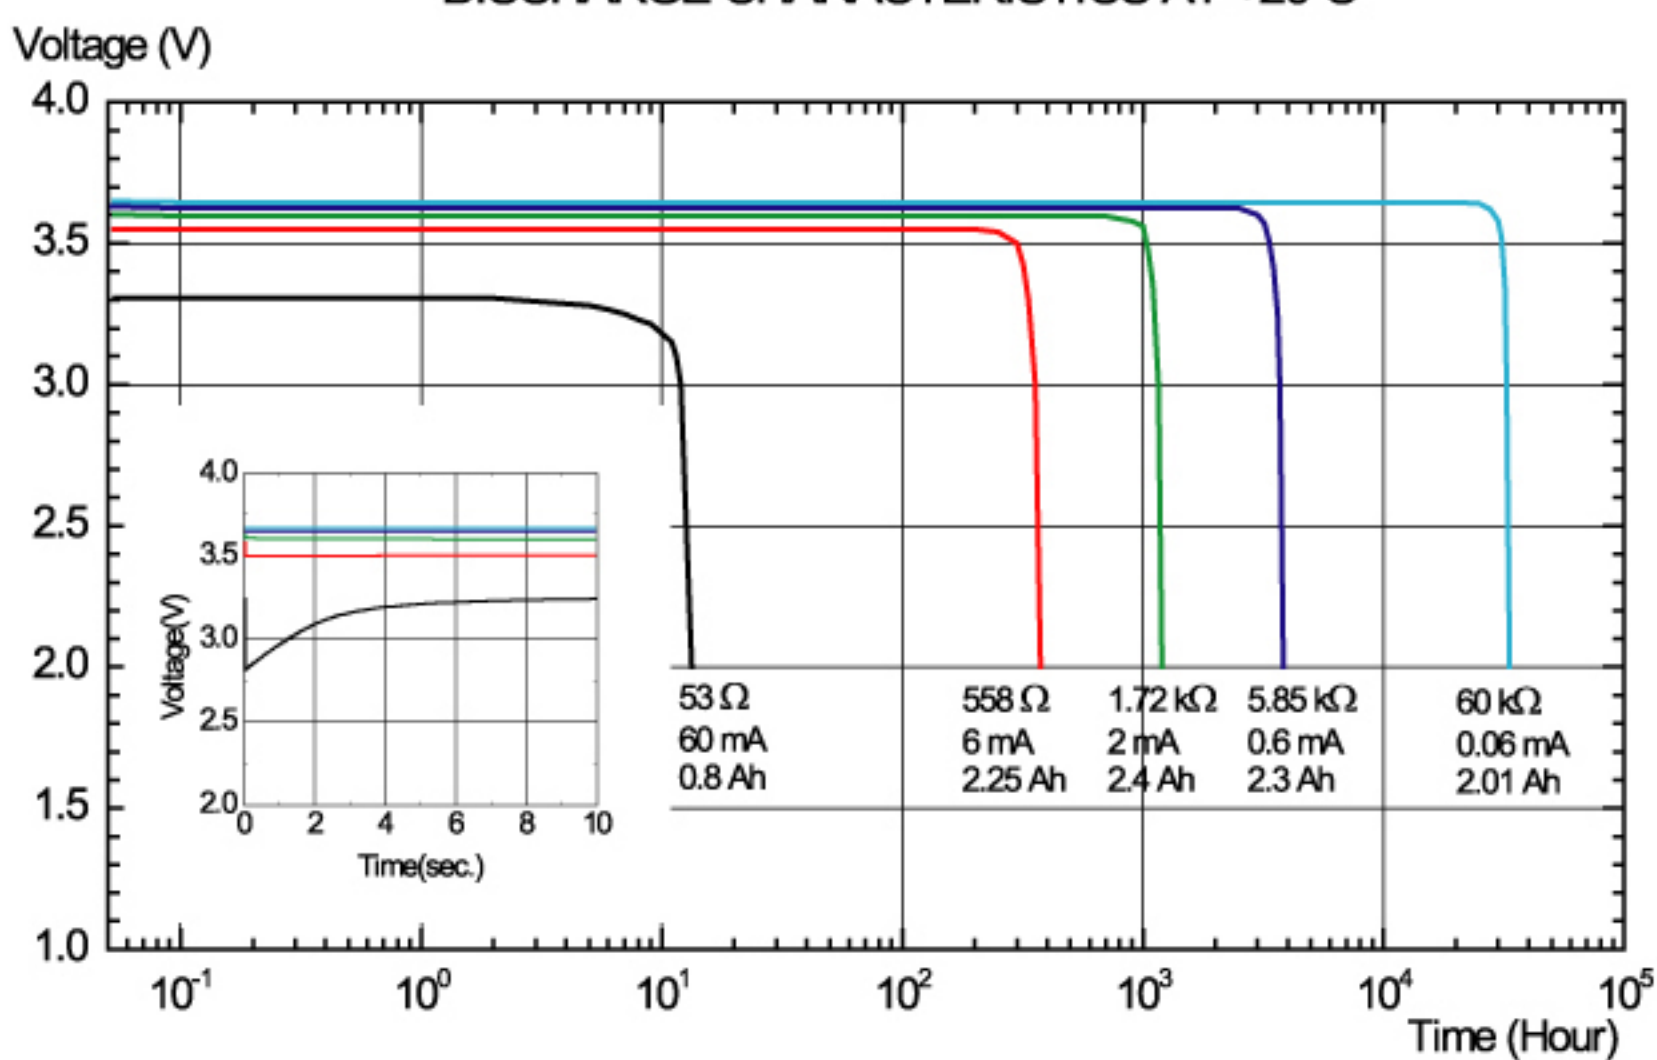

CAPACITY VS. CURRENT

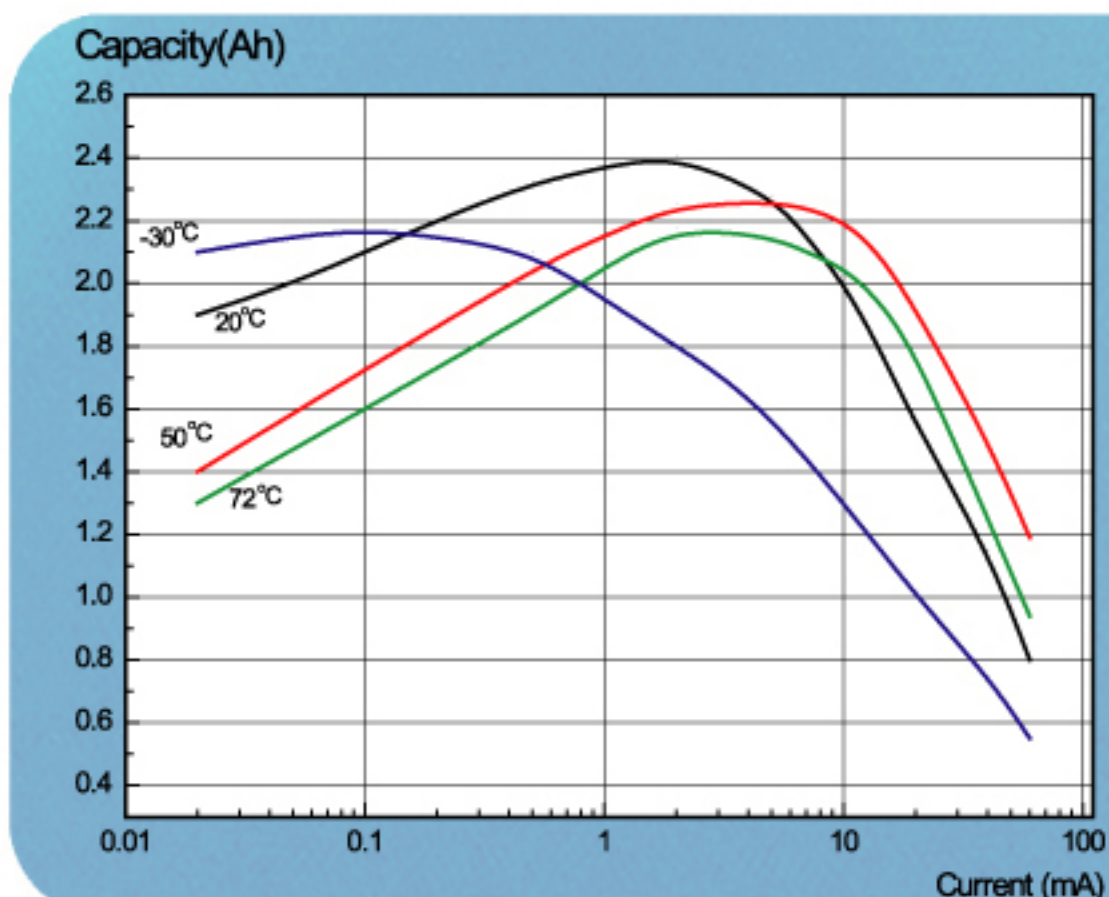


OPERATING VOLTAGE

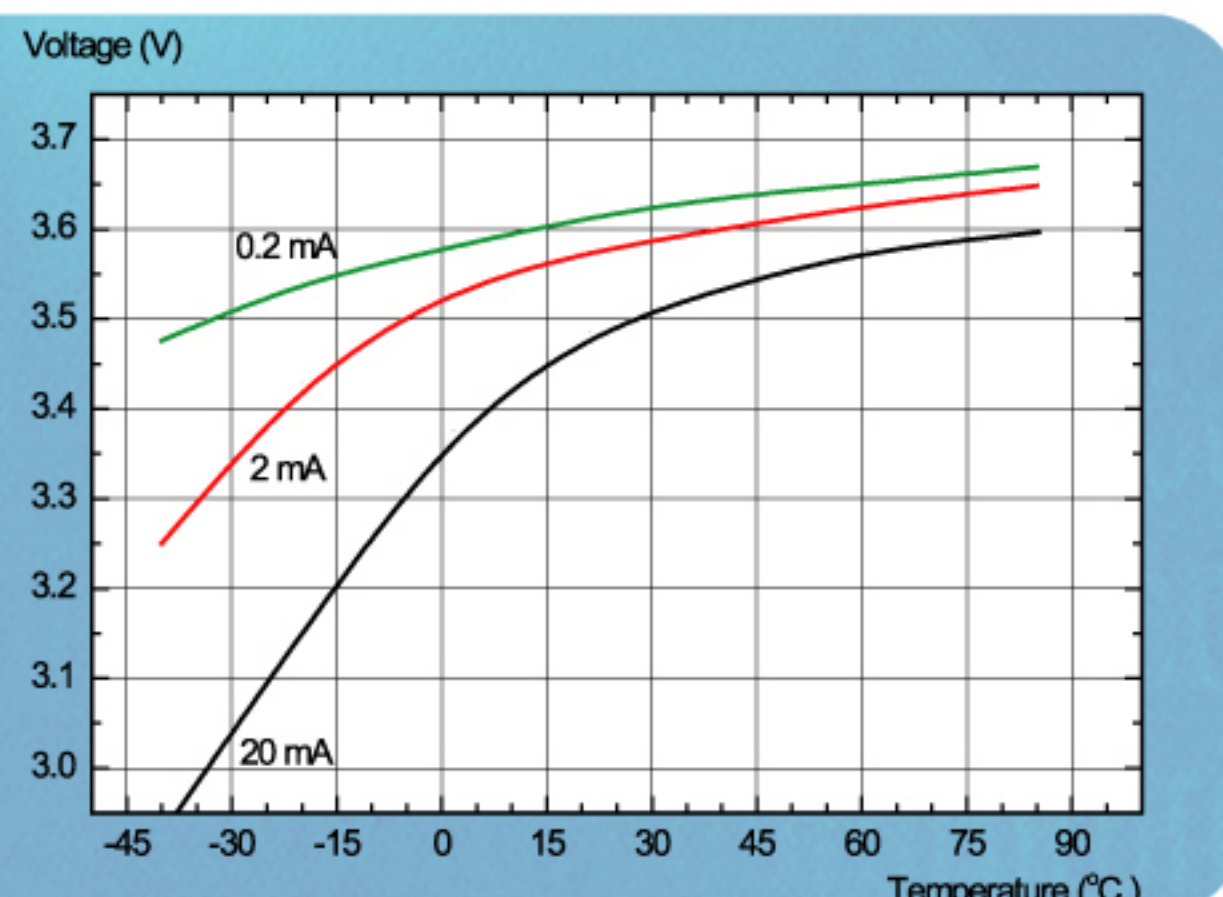

# XenoEnergy Lithium Battery

## Terminals

(Unit : mm)

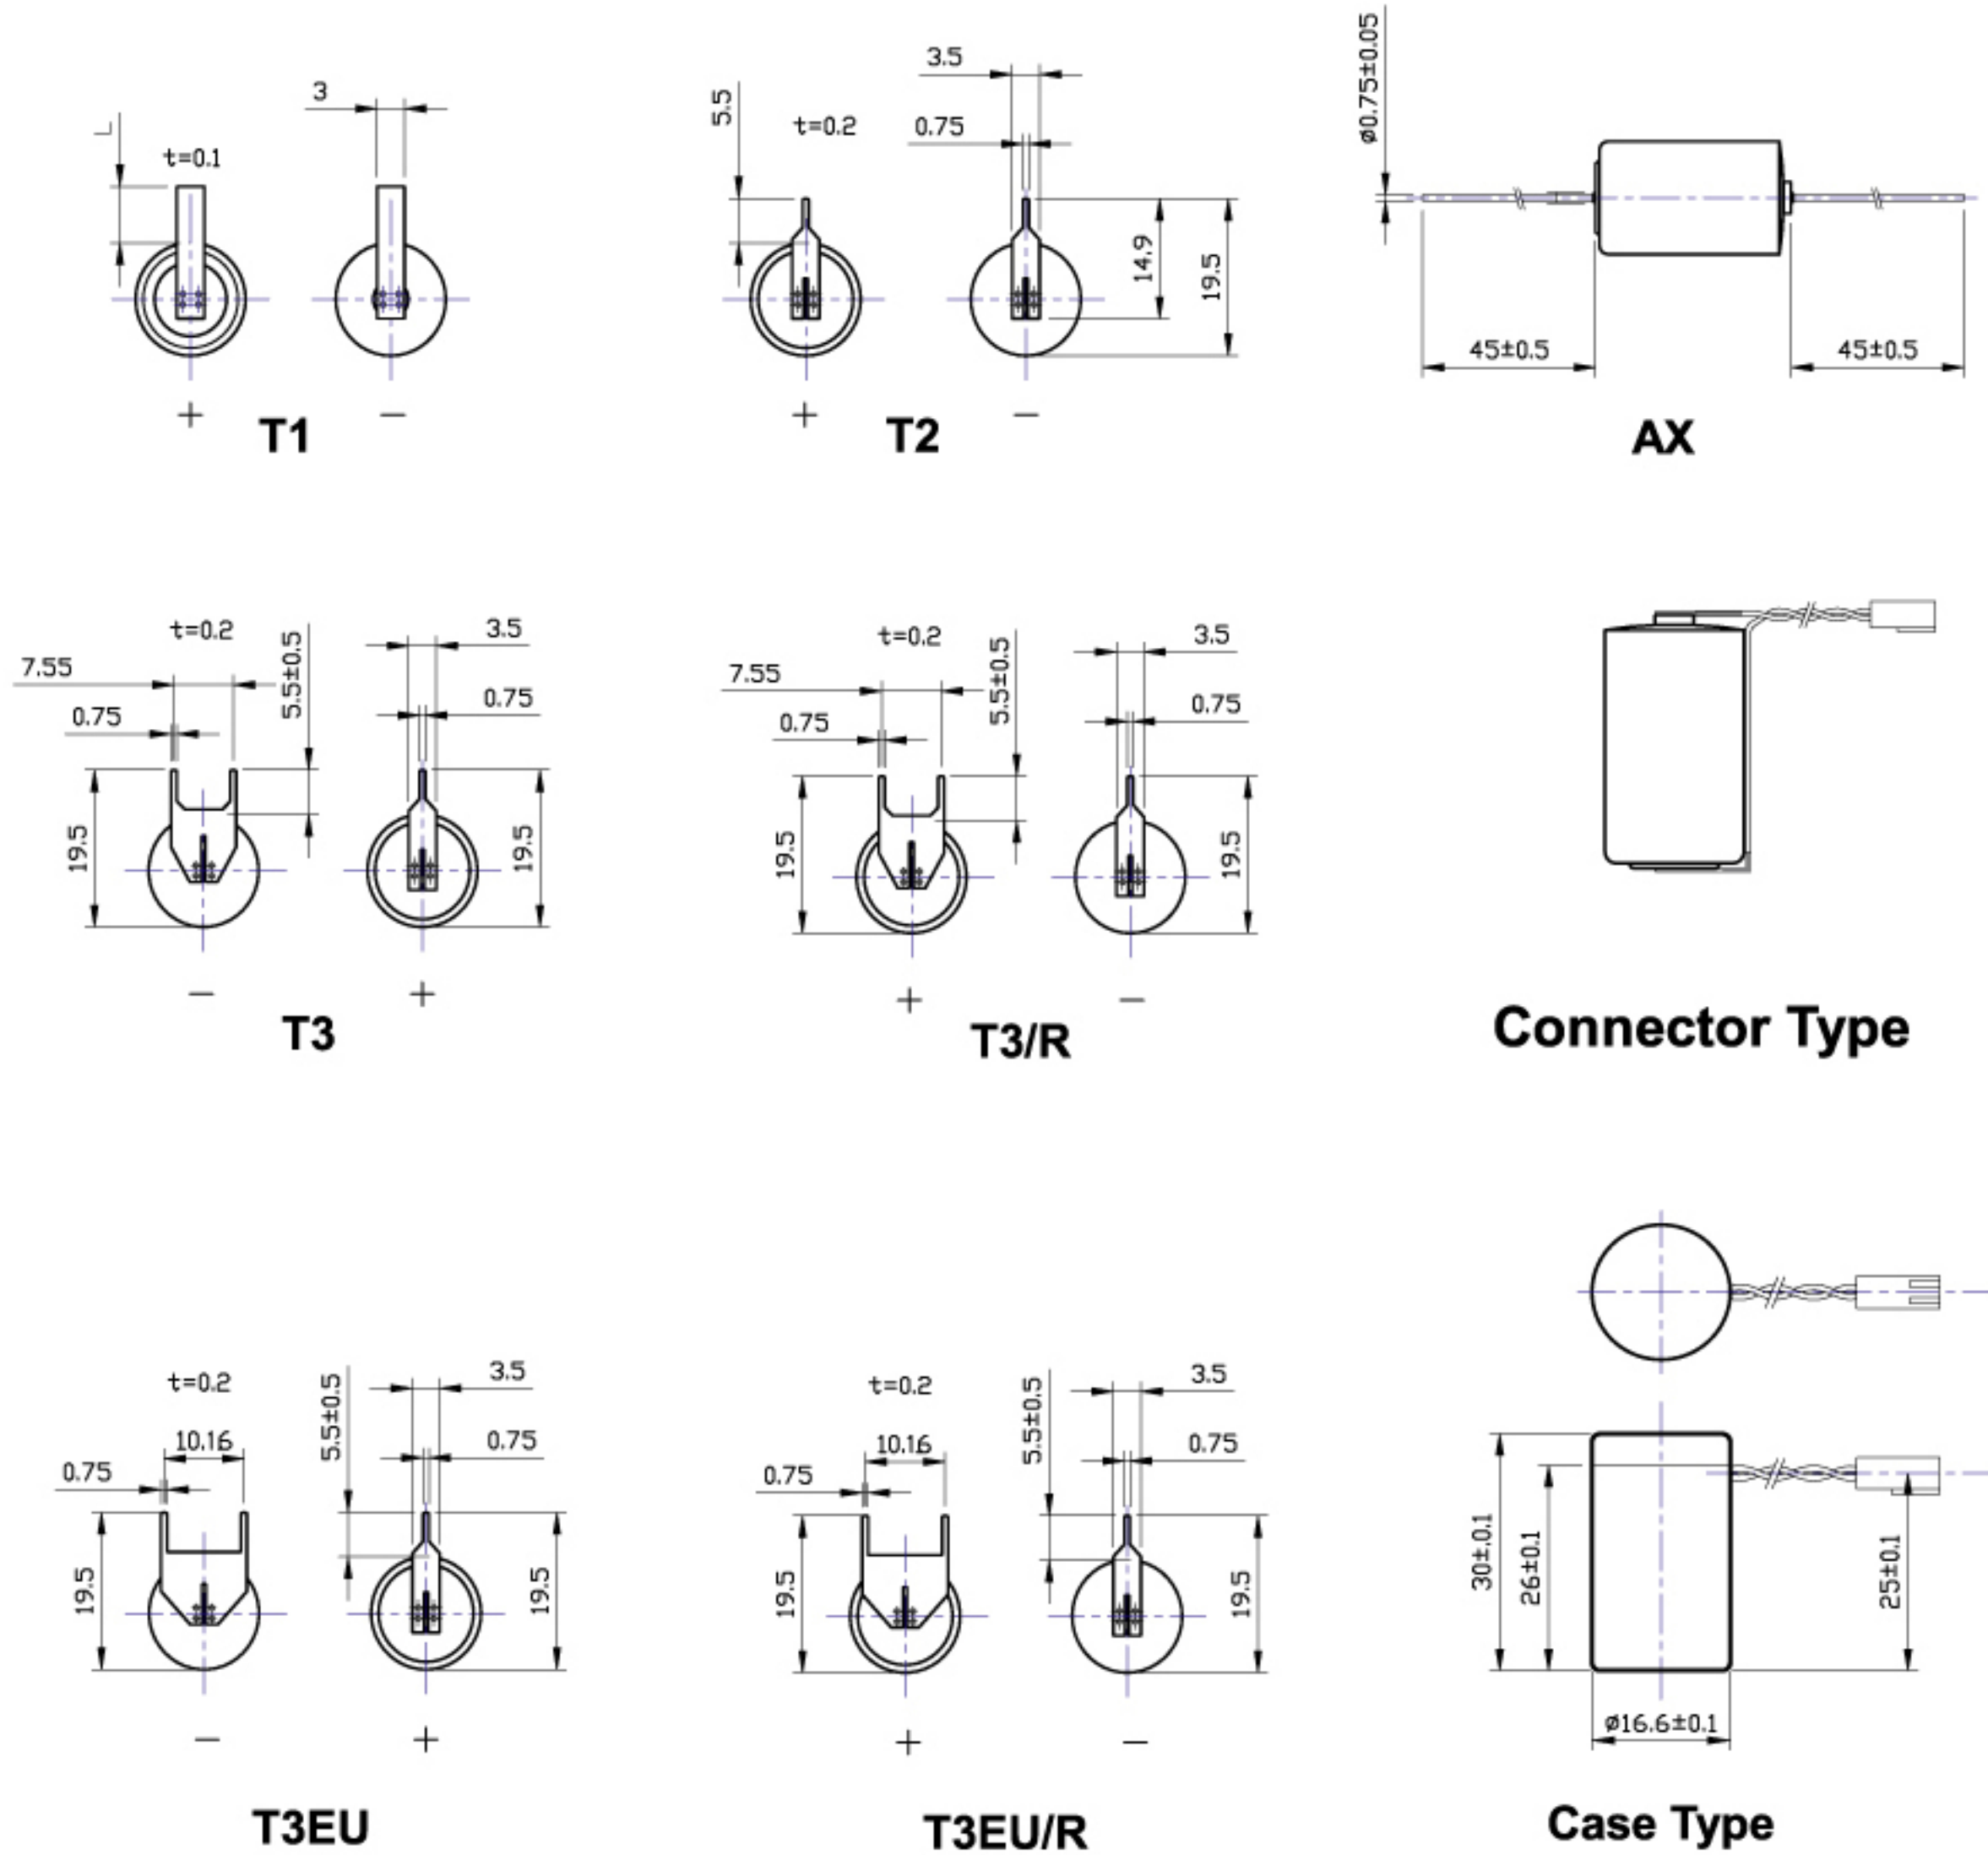

Model	T1/L(mm)	T2	T3 & T3/R	T3EU & T3EU/R	AX	Connector Type	Case Type
XL-050F	○/(7±0.5)	○	○	○	○	○	○
XL-050H	○/(7±0.5)	○	○	○	○	○	○
XL-055F	○/(7±0.5)	○	○	○	○	○	○
XL-060F	○/(7±0.5)	○	○	○	○	○	○
XL-060H	○/(7±0.5)	○	○	○	○	○	○
XL-140F	○/(16±1)				○	○	
XL-145F	○/(16±1)				○	○	
XL-200F	○/(16±1)				○	○	
XL-205F	○/(16±1)				○	○	
XL-210F					○		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Battery Packs](#) category:*

*Click to view products by [Xeno-Energy](#) manufacturer:*

Other Similar products are found below :

[2280309-1](#) [R101-B](#) [4114 210 501](#) [4120 210 501](#) [4600 726 406](#) [4610 726 406](#) [312G-U1](#) [55615703012](#) [3LR12](#) [4103 210 392](#) [4103 210 394](#)  
[4106 210 392](#) [4106 210 394](#) [4223 210 501](#) [4606 726 406](#) [4607 726 406](#) [ZA13](#) [LR03/AAA/MN2400\(K4\)](#) [LR03 MAXELL S4](#) [LR1130](#)  
[MAXELL B10](#) [LR14-MN1400-C K2](#) [LR1/910A](#) [LR41 MAXELL B10](#) [LR43](#) [LR43 MAXELL B10](#) [LR6 MAXELL S4](#) [11012](#) [E23A](#) [E90](#)  
[625302](#) [625304](#) [637871](#) [638006](#) [6LF22/9V/MN1604\(K1\)C&B](#) [6LF22/9V/MN1604 PLUS](#) [6LR61](#) [SR626SW MAXELL](#) [SR920SW](#)  
[MAXELL](#) [7K67 J](#) [55615303059](#) [GP14A S2](#) [GP15E](#) [GP1604GLF-2UE1](#) [GP 1604 ULTRA PLUS](#) [23733](#) [10 ET](#) [675 ET](#) [11A B5](#) [A544](#) [A76-](#)  
[U10](#)