



**RoHS
Compliant**


Cable Description

Inner Conductor	: BC
Conductor Dia.	: 1.00mm ±0.02
Min.Break Strength	: 376 N
Insulation	: Foam P.E.
Insulation Dia.	: 4.70mm ±0.15
Colour	: Neutral
Centricity	: ≥85%
Adhesion	: 6 to 60N @ 25mm
Shielding	: AL/P-Foil
Foil overlap	: ≥ 120%
Outer Conductor	: TC Wire Braid
Coverage	: 55% ±3
Jacket	: PVC/LSF/LSZH
Outer Dia.	: 6.55mm ±0.3
Adhesion	: 40 to 100N @ 50mm

Electrical Characteristics

Characteristic Impedance	: 75 ±3Ω
Capacitance	: 54 pF/m
Velocity Ratio	: >82%
DCR: Inner Conductor	: <26Ω/km
DCR: Outer Conductor	: <15Ω/km
Jacket Sparker	: 5,000 VCA
Dielectric Strength	: 1,500 VCA
Insulation resistance	: >10,000MΩkm

Diagram

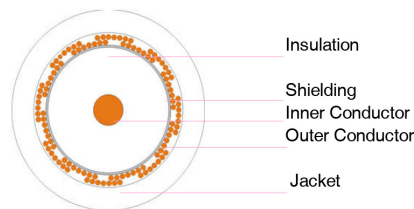

Mechanical Characteristics

Min.Bending Radius:

Installation	: 23mm
Repeated	: 70mm
Max.Pulling Tension	: 460N
Crush resistance of cable	: < 1% (load of 700N)

Rated Temperature

Storage/Operating Temperature	: -20°C to +75°C
Outdoor Installation	: -5°C

Part Number Table

Description	Colour	Part Number
Cable Coax Digital LCC100, 50m	Black	LCC100 BLK 50M
	White	LCC100 WHT 50M
	Brown	LCC100 BRN 50M
Cable Coax Digital LCC100, 100m	Black	LCC100 BLK 100M
	White	LCC100 WHT 100M
	Brown	LCC100 BRN 100M
Cable Coax Digital LCC100, 250m	Black	LCC100 BLK 250M

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.

X-ON Electronics

Authorized Distributor

Click to view similar products for [Pro Power manufacturer](#).

Other Similar products are found below :

[PPCY4C075100M](#) [PPCY3C10050M](#) [PPC217](#) [PP001328](#) [PP001316](#) [PP001109](#) [PP001088](#)

[PP000940](#) [PP030](#) [PP000909](#) [PP001326](#) [PP001308](#) [PP000877](#) [PP000868](#) [PP000704](#)

[PP001163](#) [PP001156](#) [PP001085](#) [PP000510](#) [PP001076](#) [PP000944](#) [PP000914](#) [PP000407](#)

[PP000386](#) [PP000870](#)