




SERIES COM2

- **FEATURES**
 - ULTRA SMALL PACKAGE
 - AVAILABLE FROM 1.8 VDC TO 5.0 VDC
 - ENABLE/DISABLE FUNCTION
- **SPECIFICATIONS**

SERIES		COM2 (3.3 AND 5.0 Vcc) †	COM2 (3.3 Vcc AND BELOW) †
FREQUENCY RANGE†		1.544 MHz TO 156.000 MHz	2.500 MHz TO 55.000 MHz
FREQUENCY STABILITY††		±25 PPM, ±30 PPM, ±50 PPM, ±100 PPM	±10 PPM, ±15 PPM, ±20 PPM, ±25 PPM
OPERATING TEMPERATURE RANGE		-10°C TO +70°C (STANDARD)	-10°C TO +70°C (STANDARD)
		-40°C TO +85°C (EXTENDED)	-40°C TO +85°C (EXTENDED)
STORAGE TEMPERATURE RANGE		-55° C TO +125° C	-40°C TO +85°C
INPUT	VOLTAGE	+1.8 TO +5 VDC ± 10% †	
	CURRENT (MAX)	1.544 MHz TO 9.99 MHz: 15 mA MAX 10.00 MHz TO 34.999 MHz: 20 mA MAX 35.00 MHz TO 49.999 MHz: 35 mA MAX 50.00 MHz TO 156.000 MHz: 40 mA MAX	7 mA MAX
OUTPUT	SYMMETRY	40% TO 60% AT 0.5*Vcc (NORMAL) 45% TO 55% AT 0.5*Vcc (TIGHT)	40% TO 60% AT 0.5*Vcc (NORMAL) 45% TO 55% AT 0.5*Vcc (TIGHT)
	RISE AND FALL TIME	10 ns MAX	5 ns MAX
	LOGIC "0" LEVEL	Vcc * 0.1 V MAX	Vcc * 0.1 V MAX
	LOGIC "1" LEVEL	Vcc * 0.9 V MIN	Vcc * 0.9 V MIN
	LOAD	CMOS 15 pF	CMOS 15 pF
ENABLE/DISABLE FUNCTION		PIN 1: HIGH OR OPEN PIN 3: OSCILLATION PIN 1: LOW PIN 3: HIGH IMPEDANCE	PIN 1: HIGH OR OPEN PIN 3: OSCILLATION PIN 1: LOW PIN 3: HIGH IMPEDANCE
ENABLE/DISABLE TIME		100 ns MAX	100 ns MAX
STANDBY CURRENT		100 µA MAX	10 µA MAX

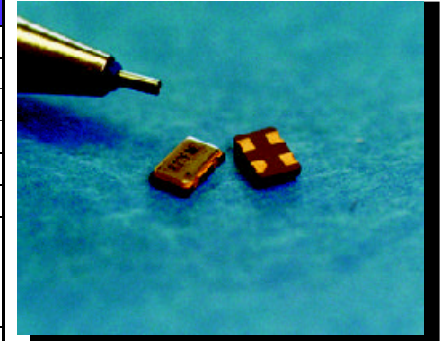


● ENVIRONMENTAL


PARAMETER	VALUE
MOISTURE SENSITIVITY LEVEL	1
REACH-SVHC	COMPLIANT
RoHS	6/6
TERMINATION FINISH	Au

† NOT ALL COMBINATIONS OF FREQUENCY AND VOLTAGE ARE AVAILABLE, CONTACT SALES AT sales@raltron.com
 †† INCLUSIVE OF 25°C TOLERANCE, OPERATING TEMPERATURE RANGE, VOLTAGE OR LOAD CHANGES, AGING, SHOCK AND VIBRATION


● OUTLINE DRAWING

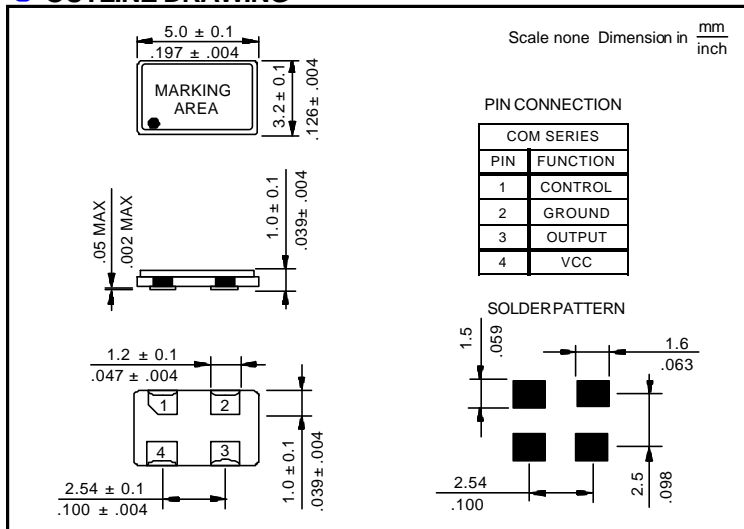

● REFLOW SOLDERING PROFILE

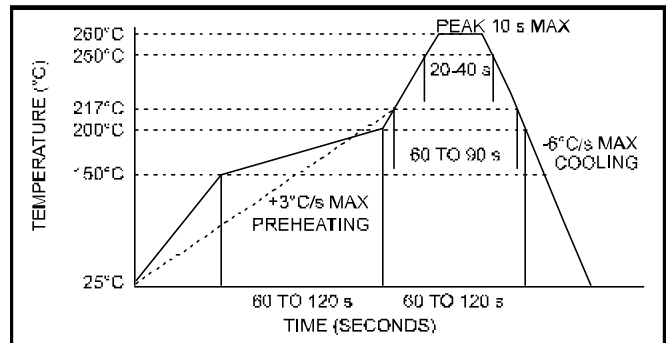

● CARRIER TAPE DIMENSIONS

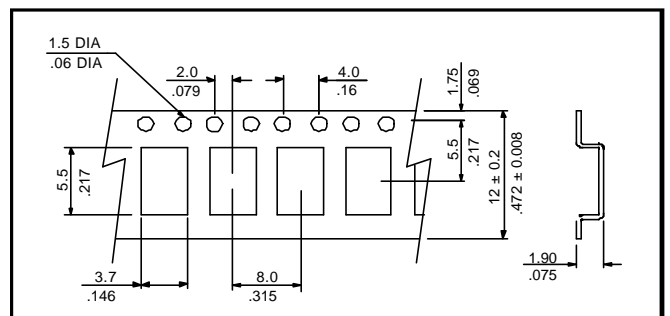

● PACKAGING

178 mm REEL DIAMETER, 12mm TAPE WIDTH, 8mm PITCH
 QUANTITY: 1000 PIECES PER REEL

● PART NUMBERING SYSTEM

SERIES	INPUT VOLTAGE †		FREQUENCY STABILITY †		FREQUENCY	EXTENDED TEMPERATURE		TIGHT SYMMETRY		TAPE AND REEL
COM2	5	5.0 VDC	10	±100 PPM	IN MHZ	EXT	EXTENDED (-40°C to +85°C)	T	TIGHT SYMMETRY (45-55%)	TR
	3	3.3 VDC	05	±50 PPM						
	30	3.0 VDC	03	±30 PPM						
	28	2.8 VDC	025	±25 PPM						
	25	2.5 VDC	02	±20 PPM						
	18	1.8 VDC	015	±15 PPM						
		01	±10 PPM							

EXAMPLE: COM2503-32.000-TR

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [raltron](#) manufacturer:

Other Similar products are found below :

[AS-24.576-18](#) [A-1.8432-18](#) [COM2305-25.000-EXT](#) [A-14.7456-18](#) [AS-4.000-20-SMD-TR](#) [RST-W2-P-N-E](#) [AS-27.000-18](#) [CO4605-125.000-EXT-T-TR](#) [CO2520-8.000-33-50-X](#) [CO4305-12.000-EXT](#) [AS-9.8304-18](#) [VC7250A-LZ-100](#) [RH100-10.000-18-3030-EXT](#) [H10S-25.000-18-F-3030-EXT](#) [CO4305-24.000-EXT-T-TR](#) [AS-14.31818-18](#) [H13-16.384-18-F-3030-EXT](#) [H13-24.000-18-F-3030-EXT](#) [R1612-27.120-8-F-3030-EXT](#) [RST-W1A4-17512-22M-H-001](#) [CO2016-10.000-3.3-50](#) [AS-12.000-18](#) [TU2045A-LZ-0.28-19.440-S3-3](#) [RH100-12.000-18-3030-EXT](#) [RST-MB-15338-22-G-001](#) [CO1100-32.000](#) [A-2.000-18](#) [AS-25.000-18](#) [H130B-24.000-18-3030-EXT](#) [CO43025-50.000-EXT-T-TR](#) [AS-4.000-18-SMD-TR](#) [CE8450B-LZ-125.000-T-4](#) [AS-14.31818-18-SMD](#) [A-10.000-18](#) [AS-6.000-18](#) [A-24.000-18](#) [A-11.0592-18](#) [CO1100-10.000](#) [AS-12.000-20](#) [A-7.3728-18](#) [CO12100-16.000MHZ](#) [CO1100-7.3728](#) [CO1100-24.000](#) [A-2.4576-18](#) [AS-4.000-20](#) [AS-8.000-18](#) [AS-5.000-18-EXT-SMD-TR](#) [RPA-PB0-486392-1-G-001](#) [RPC-W2-P-35-70-G](#) [AS-14.31818-20](#)