


WISKA COMBI 1210

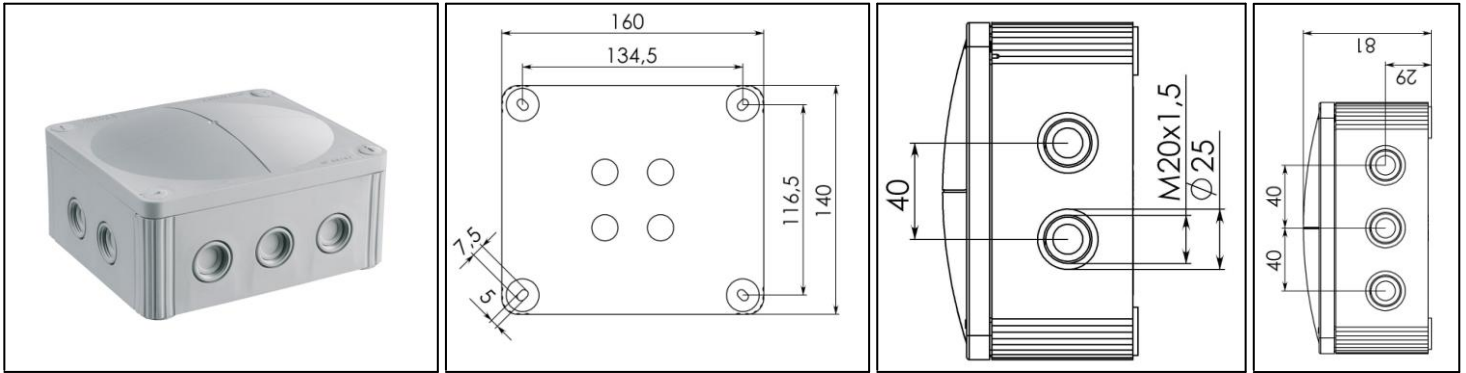

- | | |
|--|---|
| Protection class to EN 60 529: | IP 66/67 |
| Flame protection: | Glow wire test 750 C acc. to EN 60695-2-11 |
| Temperatures during installation: | -5°C to 60°C |
| Temperature range of material: | -30°C to 100°C, intermittent up to approx. 120°C |
| Voltage: | 690 V |
| Material: | Polypropylene, reinforced; Sealing: thermoplastic elastomere |
| Terminals/poles: | 10 mm ² |
| Fixing: | 4 internal openings outside of the sealing area |
| Equipment: | <ul style="list-style-type: none"> - 10 M 20 inputs with elastic soft membrane and thread, and M 25 breakout opening - 4 inputs with self-sealing ground membrane - 4 captive quick-release lid screws - Colour RAL 7035 light grey - .../S = black - .../W = white |

Type	WISKA-No.					L x B x H external / außen mm
			mm			
COMBI 1210/5	10101462	2	3 - 12			160 x 140 x 81
COMBI 1210/5/S	10101463	2	3 - 12			160 x 140 x 81
COMBI 1210/5/W	10101464	2	3 - 12			160 x 140 x 81
DIN RAIL KIT 1210	10101478	1	-			-

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [wiska manufacturer](#):

Other Similar products are found below :

[10066414](#) [10065002](#) [EMUG 32 GRY](#) [RE0400](#) [COMBI 1010/5/S](#) [COMBI 108/5](#) [ESMU 20](#) [COMBI 308/5/S](#) [COMBI 308/5](#) [10066124](#)
[ESVG25 BLK](#) [EMMU 20](#) [10066120](#) [EMUG 25 BLK](#)