


TXW SERIES

UPGRADE

105°C Long Life(7000~10000 hours), Miniaturized

◆FEATURES

- Load Life : 105°C 7000-10000 hours.
- Body diameter of φ6.3 to φ18mm with high ripple current capability.
- RoHS compliance.

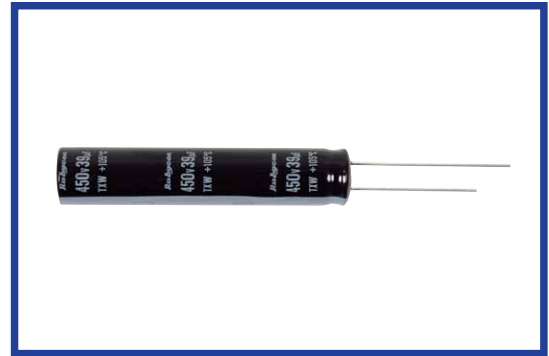

◆SPECIFICATIONS

Items	Characteristics																							
Category Temperature Range	-40~+105°C	-25~+105°C																						
Rated Voltage Range	35~100V.DV	160~450V.DC																						
Capacitance Tolerance	±20% (20°C, 120Hz)																							
Leakage Current(MAX)	I=0.01CV or 3μA whichever is greater. (After 2minutes)																							
	I=3√CV (After 5 minutes application of rated voltage)																							
	I=(μA) Leakage Current	C=(μF) Rated Capacitance																						
	V=(V) Rated Voltage																							
(tanδ) Dissipation Factor(MAX)	<table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>35</th> <th>50</th> <th>63</th> <th>80</th> <th>100</th> <th>160~400</th> <th>420~450</th> </tr> </thead> <tbody> <tr> <td>tanδ</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> <td>0.08</td> <td>0.2</td> <td>0.25</td> </tr> </tbody> </table>							Rated Voltage	35	50	63	80	100	160~400	420~450	tanδ	0.12	0.10	0.09	0.08	0.08	0.2	0.25	(20°C, 120Hz)
	Rated Voltage	35	50	63	80	100	160~400	420~450																
tanδ	0.12	0.10	0.09	0.08	0.08	0.2	0.25																	
Endurance	After life test with rated Ripplle current at conditions stated in the table below, the capacitors shall meet the following requirements.																							
		35~100V.DC			160~450V.DC			Case Size	(hrs) Life Time															
	Capacitance Change	Within ±25% of the initial value.			Within ±20% of the initial value.			φ6.3	7000															
	Dissipation Factor	Not more than 200% of the specified value.																						
Leakage Current	Not more than the specified value.						φD≥8	10000																
Low Temperature Stability Impedance Ration(MAX)	Rated Voltage	35	50	63	80	100	160~250	350~450	(120Hz)															
	Z(-25°C)/Z(20°C)	2	2	2	2	2	3	8																
	Z(-40°C)/Z(20°C)	3	3	3	3	3	—	—																

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency Coefficient
(35~100WV)

(Hz) Frequency		120	1k	10k	100k≤
Coefficient	33μF	0.42	0.70	0.90	1.00
	39~270μF	0.50	0.73	0.92	1.00
	330~680μF	0.55	0.77	0.94	1.00
	820~1800μF	0.60	0.80	0.96	1.00

(160~450WV)

(Hz) Frequency		60(50)	120	500	1k	10k≤
Coefficient	160~250WV	0.80	1.00	1.20	1.30	1.40
	350~450WV	0.80	1.00	1.25	1.40	1.50

◆OPTION


	Code
PET Sleeve	EFC

◆PART NUMBER

□□□ TXW □□□□□ M □□□ □□ D×L
 Rated Voltage Series Rated Capacitance Capacitance Tolerance Option Lead Forming Case Size

◆ DIMENSIONS

(mm)

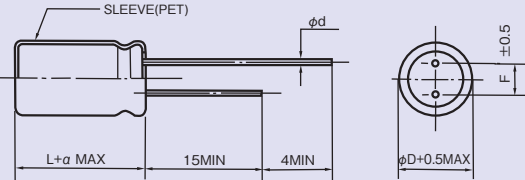

ϕD	6.3	8	10	12.5	16	18
ϕd	0.5	0.6			0.8	
F	2.5	3.5	5.0		7.5	
α	35~100V.DC	2.0			-	
	160~450V.DC	-	2.5			

◆ STANDARD SIZE

Rated Voltage (V.DC)	Rated Capacitance (μF)	Size $\phi D \times L$ (mm)	Ripple Current (A r.m.s.105°C)	
			120Hz	100kHz
35	180	6.3×25	0.605	1.21
	220	6.3×30	0.685	1.37
	330	6.3×40	0.924	1.68
	390	6.3×50	1.11	2.02
	390	8×25	0.951	1.73
	470	8×30	1.11	2.03
	680	8×40	1.41	2.57
	820	8×50	1.82	3.04
	820	10×30	1.48	2.47
	1000	8×60	2.08	3.48
	1200	10×40	1.87	3.12
	1500	10×50	2.21	3.69
1800	10×60	2.50	4.17	
50	100	6.3×25	0.510	1.02
	120	6.3×30	0.580	1.16
	180	6.3×40	0.710	1.42
	220	6.3×50	0.860	1.72
	220	8×25	0.740	1.48
	270	8×30	0.870	1.74
	390	8×40	1.22	2.23
	470	8×50	1.45	2.65
	470	10×30	1.22	2.22
	560	8×60	1.68	3.07
	680	10×40	1.55	2.82
	820	10×50	2.02	3.37
1000	10×60	2.31	3.86	
63	82	6.3×25	0.455	0.910
	100	6.3×30	0.515	1.03
	150	6.3×40	0.635	1.27
	180	6.3×50	0.775	1.55
	180	8×25	0.665	1.33
	220	8×30	0.785	1.57
	330	8×40	1.11	2.02
	390	8×50	1.32	2.41
	390	10×30	1.16	2.10
	470	8×60	1.54	2.80
	560	10×40	1.43	2.60
	680	10×50	1.71	3.12
820	10×60	2.15	3.59	

Rated Voltage (V.DC)	Rated Capacitance (μF)	Size $\phi D \times L$ (mm)	Ripple Current (A r.m.s.105°C)	
			120Hz	100kHz
80	47	6.3×25	0.455	0.910
	56	6.3×30	0.515	1.03
	82	6.3×40	0.635	1.27
	100	6.3×50	0.775	1.55
	100	8×25	0.665	1.33
	120	8×30	0.785	1.57
	180	8×40	1.01	2.02
	220	8×50	1.20	2.41
	220	10×30	1.05	2.10
	270	8×60	1.40	2.80
	270	10×40	1.30	2.60
	390	10×50	1.71	3.12
470	10×60	1.97	3.59	
100	33	6.3×25	0.382	0.910
	39	6.3×30	0.515	1.03
	56	6.3×40	0.635	1.27
	68	6.3×50	0.775	1.55
	82	8×25	0.665	1.33
	100	8×30	0.785	1.57
	120	8×40	1.01	2.02
	150	8×50	1.20	2.41
	150	10×30	1.05	2.10
	220	8×60	1.40	2.80
	220	10×40	1.30	2.60
	270	10×50	1.56	3.12
330	10×60	1.97	3.59	

◆ STANDARD SIZE

Rated Voltage (V.DC)	Rated Capacitance (μF)	Size φD×L (mm)	Ripple Current (A r.m.s.105°C)	
			120Hz	100kHz
160	56	8×25	0.32	0.448
	68	8×30	0.37	0.518
	82	8×35	0.43	0.602
	82	10×25	0.43	0.602
	100	8×40	0.49	0.686
	120	8×55	0.57	0.798
	120	10×30	0.54	0.756
	150	10×40	0.67	0.938
	150	12.5×25	0.66	0.924
	180	10×50	0.80	1.12
	180	12.5×30	0.77	1.07
	220	10×60	0.94	1.31
	220	12.5×35	0.89	1.24
	220	16×25	0.93	1.30
	270	12.5×40	1.01	1.41
	330	12.5×50	1.20	1.68
	330	16×30	1.20	1.68
	330	18×25	1.18	1.65
	390	12.5×55	1.35	1.89
	390	16×35	1.34	1.87
390	18×30	1.40	1.96	
470	16×40	1.52	2.12	
470	18×35	1.58	2.21	
560	16×50	1.79	2.50	
560	18×40	1.78	2.49	
680	18×45	2.00	2.80	
820	18×50	2.23	3.12	
200	39	8×25	0.30	0.420
	56	8×30	0.37	0.518
	68	8×40	0.45	0.630
	68	10×25	0.43	0.602
	82	8×45	0.51	0.714
	82	10×30	0.50	0.700
	100	8×55	0.60	0.840
	100	10×40	0.63	0.882
	120	10×45	0.75	1.05
	120	12.5×25	0.65	0.910
	150	10×50	0.83	1.16
	150	12.5×30	0.80	1.12
	180	10×60	0.91	1.27
	180	12.5×35	0.92	1.28
	180	16×25	0.85	1.19
	220	12.5×45	1.09	1.52
	220	16×30	1.01	1.41
	220	18×25	1.00	1.40
	270	12.5×50	1.26	1.76
	270	16×30	1.18	1.65
	270	18×30	1.16	1.62
	330	12.5×60	1.36	1.90
	330	16×40	1.31	1.83
	330	18×30	1.30	1.82
	390	16×45	1.43	2.00
	390	18×35	1.43	2.00
470	16×50	1.58	2.21	
470	18×40	1.58	2.21	
560	18×45	1.77	2.47	

Rated Voltage (V.DC)	Rated Capacitance (μF)	Size φD×L (mm)	Ripple Current (A r.m.s.105°C)	
			120Hz	100kHz
220	100	10×40	0.66	0.924
	120	10×45	0.75	1.05
	120	12.5×30	0.74	1.03
	150	12.5×35	0.86	1.20
	150	16×25	0.80	1.12
	180	12.5×40	0.99	1.38
	180	16×30	0.94	1.31
	220	12.5×50	1.08	1.51
	220	16×30	1.01	1.41
	220	18×25	0.94	1.31
	270	16×35	1.19	1.66
	270	18×30	1.13	1.58
	330	18×35	1.30	1.82
	390	18×40	1.49	2.08
	470	18×45	1.69	2.36
	250	27	8×25	0.30
39		8×30	0.37	0.518
47		8×35	0.45	0.630
47		10×25	0.37	0.518
56		8×40	0.51	0.714
56		10×30	0.42	0.588
68		8×50	0.59	0.826
68		10×35	0.49	0.686
82		10×40	0.61	0.854
82		12.5×25	0.54	0.756
100		10×45	0.68	0.952
100		12.5×30	0.69	0.966
120		10×55	0.73	1.02
120		12.5×35	0.79	1.10
120		16×25	0.74	1.03
150		12.5×40	0.92	1.28
150		16×30	0.89	1.24
180		12.5×50	0.97	1.35
180		16×30	0.95	1.33
180		18×25	0.88	1.23
220	12.5×55	1.13	1.58	
220	16×35	1.11	1.55	
220	18×30	1.10	1.54	
270	16×40	1.27	1.77	
270	18×35	1.23	1.72	
330	16×50	1.48	2.07	
330	18×40	1.42	1.98	
390	18×45	1.59	2.22	
470	18×50	1.83	2.56	

◆STANDARD SIZE

Rated Voltage (V.DC)	Rated Capacitance (μF)	Size φD×L (mm)	Ripple Current (A r.m.s.105°C)	
			120Hz	100kHz
350	22	8×30	0.25	0.375
	27	8×35	0.29	0.435
	33	8×40	0.33	0.495
	33	10×25	0.31	0.465
	39	8×45	0.37	0.555
	39	10×30	0.36	0.540
	47	8×60	0.43	0.645
	47	10×35	0.41	0.615
	56	10×40	0.47	0.705
	68	10×55	0.55	0.825
400	12	8×25	0.17	0.255
	15	8×30	0.20	0.300
	18	8×35	0.23	0.345
	22	8×40	0.26	0.390
	22	10×25	0.24	0.360
	27	8×45	0.30	0.450
	27	10×30	0.29	0.435
	33	8×55	0.35	0.525
	33	10×35	0.33	0.495
	39	10×40	0.40	0.600
	39	12.5×25	0.36	0.540
	47	10×45	0.45	0.675
	47	12.5×30	0.44	0.660
	56	10×50	0.52	0.780
	56	12.5×35	0.50	0.750
	68	12.5×40	0.58	0.870
	68	16×25	0.51	0.765
	82	12.5×45	0.65	0.975
	82	16×30	0.61	0.915
	82	18×25	0.61	0.915
	100	12.5×60	0.75	1.12
	100	16×35	0.74	1.11
	100	18×30	0.74	1.11
	120	16×40	0.80	1.20
	120	18×35	0.79	1.18
	150	16×50	0.95	1.42
	150	18×40	0.91	1.36
	180	18×45	1.04	1.56

Rated Voltage (V.DC)	Rated Capacitance (μF)	Size φD×L (mm)	Ripple Current (A r.m.s.105°C)	
			120Hz	100kHz
420	12	8×30	0.13	0.195
	15	8×35	0.17	0.255
	18	8×40	0.20	0.300
	22	8×50	0.25	0.375
	33	10×40	0.37	0.555
	39	10×45	0.41	0.615
	39	12.5×30	0.39	0.585
	47	12.5×35	0.45	0.675
	56	12.5×40	0.52	0.780
	56	16×25	0.46	0.690
	68	12.5×45	0.58	0.870
	68	16×30	0.55	0.825
	82	12.5×50	0.66	0.990
	82	16×35	0.63	0.945
	82	18×25	0.56	0.840
	100	16×40	0.73	1.09
	100	18×30	0.67	1.00
	120	18×35	0.77	1.15
	150	18×40	0.90	1.35
	450	12	8×30	0.15
15		8×40	0.19	0.285
18		8×45	0.21	0.315
33		10×40	0.36	0.540
33		12.5×30	0.37	0.555
39		10×50	0.41	0.615
39		12.5×35	0.42	0.630
47		12.5×40	0.48	0.720
47		16×25	0.44	0.660
56		12.5×45	0.53	0.795
56		16×30	0.51	0.765
68		12.5×50	0.62	0.930
68		16×35	0.59	0.885
68		18×25	0.57	0.855
82		16×40	0.68	1.02
82		18×30	0.65	0.975
100		18×35	0.74	1.11
120		18×40	0.83	1.24
150	18×45	0.95	1.42	

A custom design of the follow products is available. Please contact our sales office.

WV	Cap(μF)	Size(mm)	Ripple Current(A r.m.s. / 105°C)		
			120Hz	10kHz	100kHz
450	82	18×30	0.65	1.07	1.11
	100	18×35	0.74	1.28	1.34
	120	18×40	0.93	1.63	1.70
	150	18×41	0.95	1.81	1.90

※Multiplier for Ripple Current is not applicable

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Aluminum Electrolytic Capacitors - Leaded](#) category:

Click to view products by [Rubycon](#) manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [ESMG101ETD100MF11S](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#)
[EKXG351ETD6R8MJ16S](#) [EKZM160ETD471MHB5D](#) [EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#)
[KM4700/16](#) [KME50VB100M-8X11.5](#) [RXJ222M1EBK-1625](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [MAL211929479E3](#)
[40D506F050DF5A](#) [TE1202E](#) [36DA273F050BB2A](#) [KME25VB100M-6.3X11](#) [511D336M250EK5D](#) [511D337M035CG4D](#)
[515D477M035CG8PE3](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [EKRG100ETC221MF09D](#) [NRE-S560M16V6.3X7TBSTF](#)
[ERZA630VHN182UP54N](#) [MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#)
[EGW2GM150W16OT](#) [EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [EKZE500ELL101MHB5D](#)
[EKMM251VSN221MP25S](#) [RGA221M1HBK-1016G](#)