



MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS BXA

BXA SERIES

UPGRADE

Load Life:105°C 12000 Hours.(φ 10:10000 Hours)

◆ FEATURES

- High Ripple Current
- For Electronic Ballast, Power Supply



◆ SPECIFICATIONS

Items	Characteristics							
Category Temperature Range	−25~+105°C							
Rated Voltage Range	160~450V.DC							
Capacitance Tolerance	±20% (20°C, 120Hz)							
Leakage Current(MAX)	$I=0.04CV+100 \mu A$ (After 1 minute application of rated voltage) $I=0.02CV+25 \mu A$ (After 5 minutes application of rated voltage) $I=\text{Leakage Current} (\mu A)$ $C=\text{Rated Capacitance} (\mu F)$ $V=\text{Rated Voltage} (V)$							
Dissipation Factor(MAX)	Rated Voltage(V)	160	200	250	350	400	450	(20°C, 120Hz)
	$\tan \delta$	0.15	0.15	0.15	0.20	0.20	0.20	
Endurance	After life test with rated ripple current at conditions stated in the table below, the capacitors shall meet the following requirements.							
	Capacitance Change			Within ±20% of the initial value.				
	Dissipation Factor			Not more than 200% of the specified value.				
	Leakage Current			Not more than the specified value.				
Low Temperature Stability Impedance Ratio(MAX)	Rated Voltage(V)	160	200	250	350	400	450	(120Hz)
	$Z(-25^\circ\text{C})/Z(20^\circ\text{C})$	3	3	3	6	6	6	

◆ MULTIPLIER FOR RIPPLE CURRENT

Frequency coefficient

Frequency (Hz)	120	1k	10k	100k≤
Coefficient	0.50	0.80	0.90	1.00

◆ PART NUMBER


_____ BXA _____ D X L
 Rated Voltage Series Rated Capacitance Capacitance Tolerance Option Lead Forming Case Size



MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS BXA

◆DIMENSIONS

(mm)

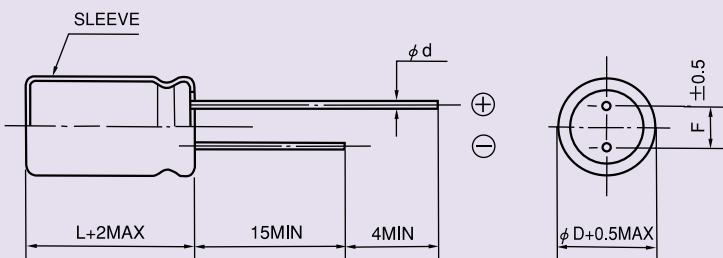

ϕD	10	12.5	16	18
ϕd	0.6		0.8	
F	5.0		7.5	

◆STANDARD SIZE, RATED RIPPLE CURRENT

Size $\phi D \times L$ (mm), Ripple Current (mA r.m.s./105°C, 100kHz)


Cap (μF)\WV (V.DC)	160V (2C)		200V (2D)		250V (2E)	
	Size	Ripple	Size	Ripple	Size	Ripple
10	10×16	250	10×16	250	10×20	280
22	10×20	500	10×20	500	12.5×20	600
33	10×20	500	12.5×20	600	12.5×20	600
47	12.5×20	660	12.5×20	660	12.5×25 16×20	720
68	12.5×25 16×20	760	12.5×25 16×20	760	16×25 18×20	920
100	16×25 18×20	1120	16×25 18×20	1120	16×31.5 18×25	1200
150	16×31.5 18×25	1360	16×31.5 18×25	1360	18×31.5	1500
220	16×31.5 18×25	1400	18×31.5	1700		

Cap (μF)\WV (V.DC)	350V (2V)		400V (2G)		450V (2W)	
	Size	Ripple	Size	Ripple	Size	Ripple
6.8	10×16	220	10×16	220	10×20	150
10	10×20	280	10×20	280	12.5×20	320
22	12.5×20	350	12.5×25 16×20	430	16×25 18×20	560
33	16×20	500	16×25 18×20	640	16×31.5 18×25	700
47	16×25 18×20	660	16×31.5 18×25	840	18×31.5	880
68	16×31.5 18×25	850	18×31.5	1000		


◆CHARACTERISTIC DATA

— 250 BXA 68M 16×25
- - - - 450 BXA 22M 16×25

• TEMPERATURE CHARACTERISTICS

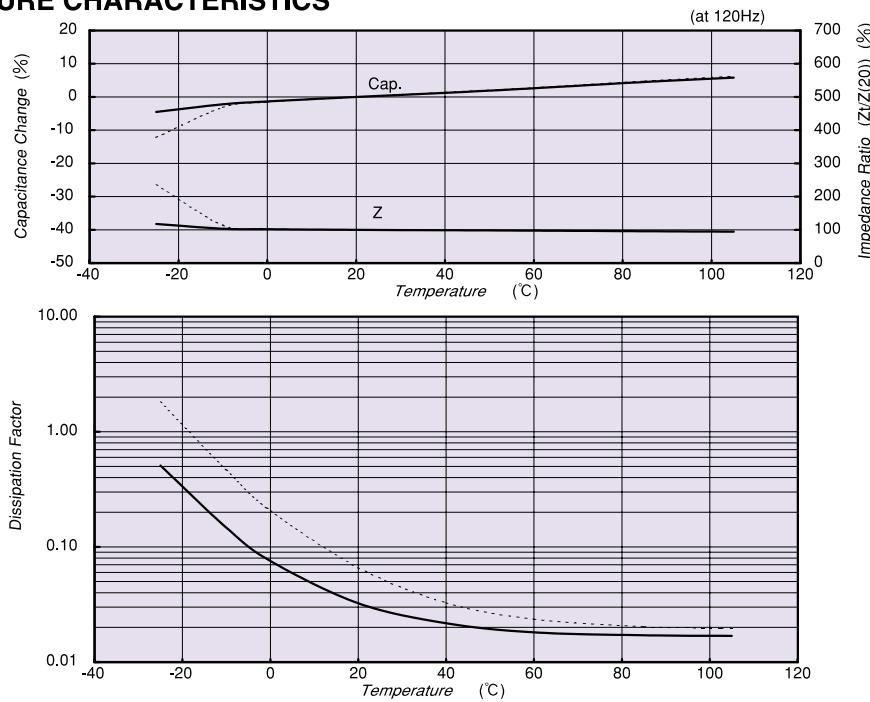

• ENDURANCE

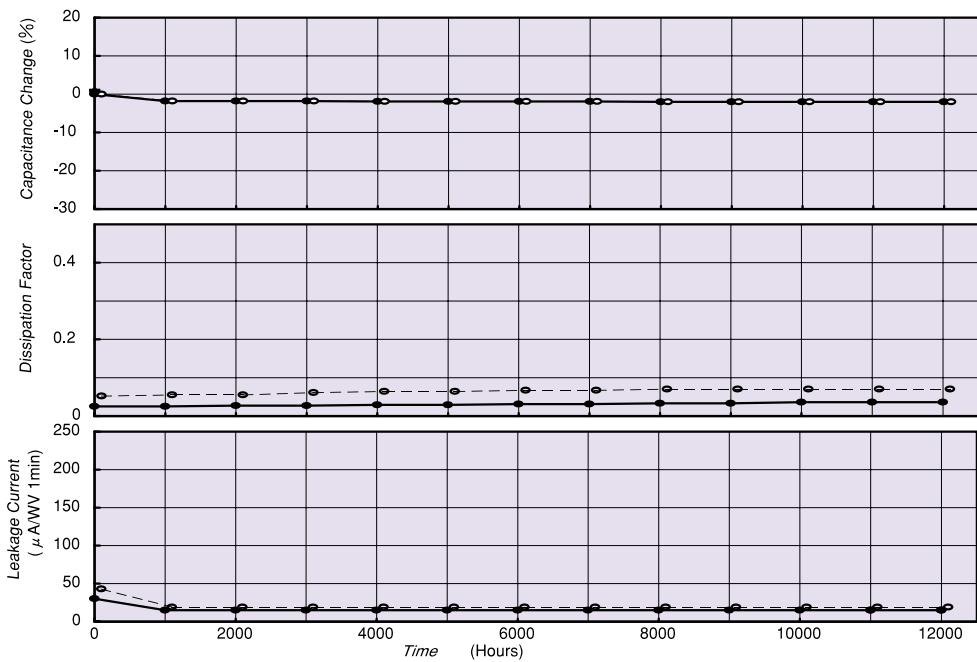

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Aluminum Electrolytic Capacitors - Leaded category:

Click to view products by Rubycon manufacturer:

Other Similar products are found below :

[LXY50VB4.7M-5X11](#) [MAL203125221E3](#) [MAL204216159E3](#) [ESMG101ETD100MF11S](#) [RBC-25V-10UF-4X7](#) [RE3-35V222MJ6#](#) [RFO-100V471MJ7P#](#) [B41041A2687M8](#) [B41041A7226M8](#) [B41044A7157M6](#) [EKRG250ELL100MD07D](#) [EKXG201EC3101ML20S](#) [EKXG351ETD6R8MJ16S](#) [EKZM160ETD471MHB5D](#) [EPA-201ELL151MM25S](#) [NCD681K10KVY5PF](#) [NRLF103M25V35X20F](#) [KM4700/16](#) [KME50VB100M-8X11.5](#) [RXJ222M1EBK-1625](#) [SG220M1CSA-0407](#) [ES5107M016AE1DA](#) [ESX472M16B](#) [MAL211929479E3](#) [40D506F050DF5A](#) [TE1202E](#) [36DA273F050BB2A](#) [KME25VB100M-6.3X11](#) [511D336M250EK5D](#) [511D337M035CG4D](#) [515D477M035CG8PE3](#) [052687X](#) [EKMA500ELL4R7ME07D](#) [EKRG100ETC221MF09D](#) [NRE-S560M16V6.3X7TBSTF](#) [ERZA630VHN182UP54N](#) [MAL214099813E3](#) [MAL211990518E3](#) [MAL204281229E3](#) [NEV680M35EF](#) [686KXM050M](#) [ERS1VM222L30OT](#) [EGW2GM150W16OT](#) [EGS2GM6R8G12OC](#) [EHS2GM220W20OT](#) [ERF1VM222L30OT](#) [ERF1KM151G20OT](#) [EKZE500ELL101MHB5D](#) [EKMM251VSN221MP25S](#) [RGA221M1HBK-1016G](#)