

ADAM-4017+ ADAM-4018+ ADAM-4019+

8-ch Analog Input Module with Modbus

8-ch Thermocouple Input Module with Modbus


8-ch Universal Analog Input Module with Modbus



ADAM-4017+



ADAM-4018+

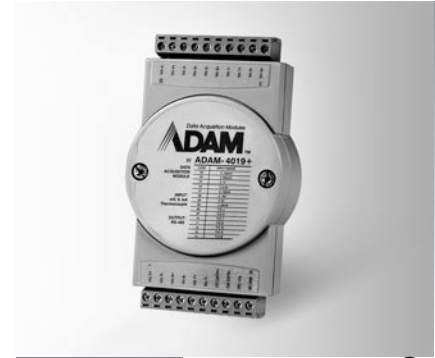

ADAM-4019+

Specifications

General

- **Power Consumption** 1.2 W @ 24 V_{DC}
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII command and Modbus/RTU

Analog Input

- **Channels** 8 differential
- **Channel Independent Configuration** Yes
- **Input Impedance** Voltage: 20 MΩ
Current: 120 Ω
- **Input Type** mV, V, mA
- **Input Range** ADAM-4017+ ±150 mV, ±500 mV, ±1 V, ±5 V, ±10 V, ±20 mA, 4 ~ 20 mA

Specifications

General

- **Power Consumption** 0.8 W @ 24 V_{DC}
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII command and Modbus/RTU

Analog Input

- **Channels** 8 differential
- **Channel Independent Configuration** Yes
- **Input Impedance** Voltage: 20 MΩ
Current: 120 Ω
- **Input Type** Thermocouple, mA
- **Voltage/Current Input Range** ADAM-4018+ 0 ~ 20 mA, 4 ~ 20 mA
- **T/C Types and Temperature Ranges**

J	0 ~ 760° C	R	500 ~ 1,750° C
K	0 ~ 1,370° C	S	500 ~ 1,750° C
T	-100 ~ 400° C	B	500 ~ 1,800° C
E	0 ~ 1,000° C		

- **Burn-out Detection** All T/C

Specifications

General

- **Power Consumption** 1.0 W @ 24 V_{DC}
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII command and Modbus/RTU

Analog Input

- **Channels** 8 differential channels for individual input type
- **Channel Independent Configuration** Yes
- **Input Impedance** Voltage: 20 MΩ
Current: 120 Ω
- **Input Type** T/C, mV, V, mA
- **Voltage/Current Input Range** ±1 V, ±2.5 V, ±5 V, ±10 V, ±100 mV, ±500 mV, ±20 mA, 4 ~ 20 mA
- **T/C Types and Temperature Ranges**

J	0 ~ 760° C	R	500 ~ 1,750° C
K	0 ~ 1370° C	S	500 ~ 1,750° C
T	-100 ~ 400° C	B	500 ~ 1,800° C
E	0 ~ 1,000° C		

- **Burn-out Detection** 4 ~ 20 mA & all T/C

Common Specifications

General

- **Power Input** Unregulated 10 ~ 30 V_{DC}
- **Connectors** 2 x plug-in terminal block (#14 ~ 22 AWG)

Analog Input

- **Accuracy** Voltage mode: ±0.1% or better
Current mode: ±0.2% or better
- **Resolution** 16-bit
- **Sampling Rate** 10 sample/second (total)
- **Isolation Voltage** 3,000 V_{DC}

- **Overvoltage Protection** ±35 V_{DC}
- **CMR @ 50/60 Hz** 120 dB
- **NMR @ 50/60 Hz** 100 dB
- **Span Drift** ±25 ppm/° C
- **Zero Drift** ±6 μV/° C
- **Built-in TVS/ESD Protection**

Environment

- **Humidity** 5 ~ 95% RH
- **Operating Temperature** -10 ~ 70° C (14 ~ 158° F)
- **Storage Temperature** -25 ~ 85° C (-13 ~ 185° F)

Ordering Information

- **ADAM-4017+** 8-ch Analog Input Module with Modbus
- **ADAM-4018+** 8-ch Thermocouple Input Module w/Modbus
- **ADAM-4019+** 8-ch Universal Analog Input Module w/Modbus

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [advantech](#) manufacturer:

Other Similar products are found below :

[ADAM-4117-AE](#) [ADAM-6017-CE](#) [WISE-1520ITB-TDA1E](#) [ADAM-4018+-BE](#) [ADAM-6224-AE](#) [PCM-9370F-L4A2](#) [ARK-2121L-U0A1E](#)
[EKI-9316-P0ID42E](#) [EKI-5626C-AE](#) [EKI-1521-BE](#) [ADAM-4520I-AE](#) [EKI-5526I-AE](#) [EKI-2741LX-AE](#) [DVP-7633HE](#) [PWR-243-AE](#)
[ADAM-4068-BE](#) [ADAM-6066-CE](#) [ADAM-6521-BE](#) [ADAM-3013-AE](#) [ADAM-4052-BE](#) [ADAM-4521-AE](#) [ADAM-4541-AE](#) [OPT4A-AE](#)
[PCI-1711UL-CE](#) [PCI-1739U-AE](#) [PCI-1756-BE](#) [PCI-1762-BE](#) [PCIE-1612B-AE](#) [PCIE-1612C-AE](#) [PCIE-1622B-BE](#) [PCIE-1751-AE](#) [PCIE-](#)
[1753-AE](#) [PCL-10125-1E](#) [PCL-10125-3E](#) [PCL-10250-1E](#) [USB-4702-AE](#) [USB-4716-AE](#) [SQF-S25M4-16G-S9E](#) [SQF-S25M8-128G-SAC](#)
[96FD-M128-ITR71](#) [SQF-MSDM1-32G-21C](#) [PSD-A40W24](#) [SOM-6896C3-U1A1E](#) [PCE-4128G2-00A1E](#) [DVP-7016HE](#) [SQF-S25S2-8G-S9C](#)
[EKI-7758F-AE](#) [SQF-S25M4-128G-S9E](#) [USB-4751L-AE](#) [DS-370GQ-U0A1E](#)