
Specify **F**



HC-49/S Low Profile Crystal

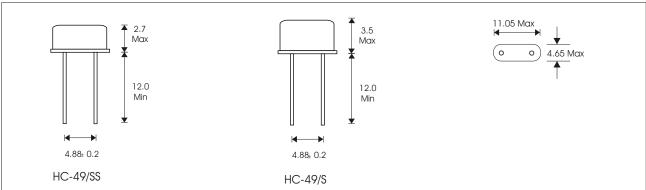

FEATURES

- Standard Frequencies Ex-Stock
- Low Cost Solution
- Standard I.C Height
- Standard HC49U Base

APPLICATIONS

- Microprocessor Systems
- **Datacommunications**
- Consumer Electronics
 - Automotive Electronics

STANDARD SPECIFICATION

Frequency Range: 3.20 MHz to 70.00 MHz

Adjustment Tolerance at 25°C: ±30PPM Max. Frequency Stability: ±50PPM Max.

Operating Temperature Range: -10°C to +60°C

Load Capacity: 30pF

> E.S.R: See Table Drive level: 100 MicroWatt Ageing: ±5PPM 1st Year Max.

Frequency Range			E.S.R	Mode
3.2 MHz 3.5 MHz 4.0 MHz 4.4 MHz 4.9 MHz 6.0 MHz 7.0 MHz 8.0 MHz 11.0 MHz 12.0 MHz		3.49 MHz 3.99 MHz 4.39 MHz 4.89 MHz 5.99 MHz 6.99 MHz 7.99 MHz 10.99 MHz 11.99 MHz 14.99 MHz	200 140 120 100 80 60 50 45 40	Fund Fund Fund Fund Fund Fund Fund Fund
15.0 MHz 27.0 MHz	~	36.00 MHz 70.00 MHz	30 100	Fund 3 O/T

AVAILABLE OPTIONS

Frequency Range: 3.2 MHz ~ 70.0 MHz Adjustment Tolerance \pm 10PPM \sim \pm 100PPM Load Capacity: Series or 9pF \sim 50pF Shunt Capacity (C0): $4.5pF \sim 7pF (Typ.)$ Dynamic Capacity (C1): $18 \text{fF} \sim 20 \text{fF} \text{ (Typ.)}$

Frequency Stability vs Operating Temperature Range

Temperature Range	Temperature 3 ability						
	+/ -10 PPM	+/- 20PFM	+/- 50PFM	+/- 100PFM			
-10 b +60 -20 to +70 -40 to +90 -55 to +105	•	•					

Value Added Services

Operating

In addition, AEL Crystals Ltd are able to offer our customers the following value added services:-

- Fitted Insulators
- Radial Taping
- Lead Cropping Earth Lead
- Lead Pre-Forming Bar-Coding



quartz based frequency control components

Order Hotline +44 1293 524245

www.aelcrystals.co.uk sales@aelcrystals.co.uk

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for ael manufacturer:

Other Similar products are found below:

O16M000000L021 X9M830400L035 O25M000000L684 O100M000000L010 O20M000000L046 O64M000000L153

E3SB16.0000F09G11AE O25M000000L063 X14M000000L001 O3M686400L120 O25M000000L059 X5M000000L001 X9M830400L152

O40M000000L125 X4M194304L056 X50M000000L001 X12M000000L188 X4M608000L075 O32M000000L097 O40M000000L126

X15M000000L002 O4M000000L134 O8M000000L166 O20M000000L676 X32K768S021 X307K200L001 X40M000000L104

O8M000000L642 C8M000000L004 X1M843200L010 C4M000000L001 X19M660800L307 X20M0000000L010 X32K768S019

X7M372800L027 O10M000000S023 X32K768L009 C8M000000S014 C16M000000L003 X32K768L104