



5x20mm Fused Terminal Block

Features

- 1 - 5 pole terminal strip with 5x20mm fuse holder to IEC257
- Interlocking fuse holder CFTBN/1
- Anti-rotation spigot
- IP20 finger protection
- Cable entry 4mm² (2.5mm² with wire protector)
- Wire protector on fuse terminal as standard
- Standard 1 to 5 pole with earth screw, without wire protectors
- Version 2 - 5 WP without earth, with wire protector on all poles
- Version 3 - 5 EWP with earth, wire protector on all poles but earth
- Version 3 - 5 NE without earth, without wire protectors
- Meets creepage and clearance requirements of IEC (8mm)
- 16mm fixing pitch
- Screw/dust protection cover available

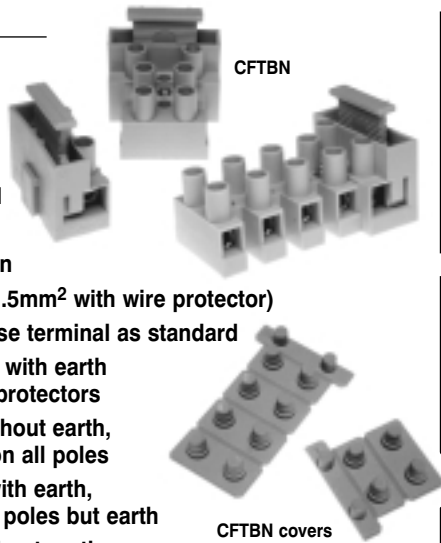

Type No.	
CFTBN/3C	3 pole cover
CFTBN/5C	5 pole cover

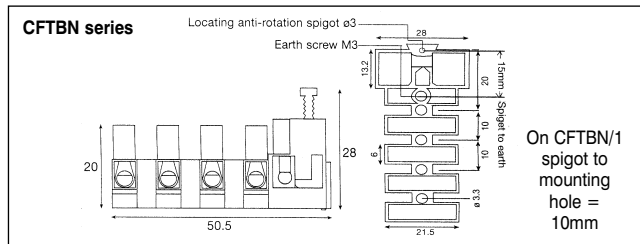

Type No.	Poles	Type No.	Poles
CFTBN/1	1	CFTBN/3EWP	3 with wire protector & earth screw (no WP on earth connection)
CFTBN/2	2	CFTBN/4EWP	4 with wire protector & earth screw (no WP on earth connection)
CFTBN/3	3 with earth screw	CFTBN/5EWP	5 with wire protector & earth screw (no WP on earth connection)
CFTBN/4	4 with earth screw	CFTBN/3EWP	3 with wire protector & earth screw
CFTBN/5	5 with earth screw	CFTBN/4EWP	4 with wire protector & earth screw
CFTBN/3NE	3 no earth screw facility	CFTBN/5EWP	5 with wire protector & earth screw
CFTBN/4NE	4 no earth screw facility		
CFTBN/5NE	5 no earth screw facility		
CFTBN/2WP	2 with wire protector/ no earth screw		
CFTBN/3WP	3 with wire protector/ no earth screw		
CFTBN/4WP	4 with wire protector/ no earth screw		
CFTBN/5WP	5 with wire protector/ no earth screw		

Specification

Voltage rating:	Fuse holder 250Vac, terminal 450Vac
Current rating:	Fuse holder 13Amp, terminal 20Amp
Working temperature:	-20°C to 125°C
Short period:	160°C
Moulding:	UL94-V0 flame retardant PA 66

Terminal:	Brass, nickel plated
Wire protector/fuse clip:	Phosphor bronze
Fuse holder:	5 x 20mm glass or ceramic
Screws:	M3, 6µ zinc, colour passivated and tropicalised
Approvals:	Semko, Fimko, VDE, IMQ, Nemko, UL

1"x1/4" Fused Terminal Block


Features

- 2 or 3 pole terminal block
- Accepts 5x20mm & 6.3x25mm (1"x1/4") fuses
- To IEC257
- Anti rotation spigot
- IP20 finger protection
- Cable entry 10mm² (3x1.5mm² or 2x2.5mm²)
- Meets creepage and clearance requirements of IEC (8mm)
- 16mm fixing pitch
- 2 pole supplied in 3 pole housing
- Supplied complete with earth screw and washer



Specification

Voltage rating:	Fuse holder 250Vac, terminal 450Vac
Current rating:	Fuse holder 13Amp, terminal 20Amp
Working temperature:	-20°C to 125°C
Moulding:	UL94-V0 flame retardant PA66
Terminal:	Brass, nickel plated
Fuse clip:	Phosphor bronze
Fuse size:	5x20mm & 6.3x25mm (1"x1/4") glass or ceramic
Screws:	M3.5, 6µ zinc colour passivated and tropicalised
Approvals:	CE
Terminal Marking:	L=live/ ≠(earth sign)=Earth/N=neutral

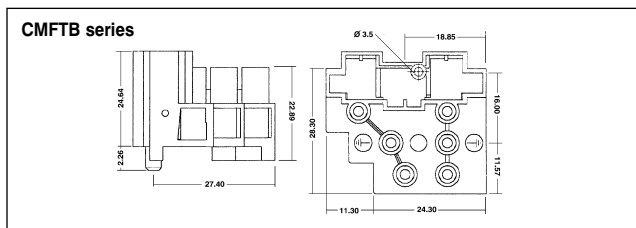

Type No.	Poles
CMFTB/2	2
CMFTB/3	3

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [camden manufacturer](#):

Other Similar products are found below :

[412689X](#) [CTBP92VE/12R](#) [CTBP9350/12](#) [IND515205-240-T/GRN](#) [IND515205-240-T/RD](#) [IND5032405-240-T/GRN](#) [CE10.00.EI](#)
[C192SHAND](#) [CNMB/6ST/2](#) [CNMB/4ST/2](#) [CSACST004](#) [CTBP9200/9](#) [CIME/M/BE2250SS](#) [CHH64E1BL](#) [CIM/15W-DMFS](#) [CHHBAT2GY](#)
[CFTBN/2](#) [CCB2S1/04](#) [CHDX6-221C](#) [CHDX8-224](#) [CHDASMP29](#) [CHDASMP34](#) [CHDX810DD](#) [CHDX811DD](#) [CCTTM40LR](#)
[CTBP92VJ/5S](#) [CTBP92VJ/8R](#) [CTSN431/12/M](#) [CTSN433/12/M](#) [CUABOX006](#) [CE10.00.FM](#) [CBRPH-BLK](#) [BIM2003/13-WH/WH](#)
[RX2008/S-5-WH](#) [CBARD-CAR](#) [CRDCG0007](#) [CNMB/4/KIT](#) [CTB5050/5](#) [CTBP92HE/11](#) [CTBP9358/10AO](#) [CHH66C2GY](#) [CHH456PBK](#)
[CHH451ABK](#) [CIM/9W-DMFS](#) [CIM/25W-DMFS](#) [RTM5006/16-NC-BLK](#) [IND5032405-125-T/AMB](#) [CCB1S1/03](#) [CCD2S1/04](#) [CCE1S1/05](#)