

**ISP815X, ISP825X, ISP845X  
ISP815, ISP825, ISP845**



**ISOCOM**  
**COMPONENTS**

**HIGH DENSITY MOUNTING  
PHOTODARLINGTON OPTICALLY  
COUPLED ISOLATORS**



**APPROVALS**

- UL recognised, File No. E91231  
Package Code FF
- 'X' SPECIFICATION APPROVALS
  - VDE 0884 in 3 available lead form :-
    - STD
    - G form
    - SMD approved to CECC 00802
  - Certified to EN60950 by Nemko - Certificate No. P01102465

**DESCRIPTION**



The ISP815, ISP825, ISP845 series of optically coupled isolators consist of infrared light emitting diodes and NPN silicon photodarlingtons in space efficient dual in line plastic packages.

**FEATURES**

- Options :-
  - 10mm lead spread - add G after part no.
  - Surface mount - add SM after part no.
  - Tape&reel - add SMT&R after part no.
- High Current Transfer Ratio (600% min)
- High Isolation Voltage (5.3kV<sub>RMS</sub>, 7.5kV<sub>PK</sub>)
- All electrical parameters 100% tested
- Custom electrical selections available

**APPLICATIONS**

- Computer terminals
- Industrial systems controllers
- Measuring instruments
- Signal transmission between systems of different potentials and impedances

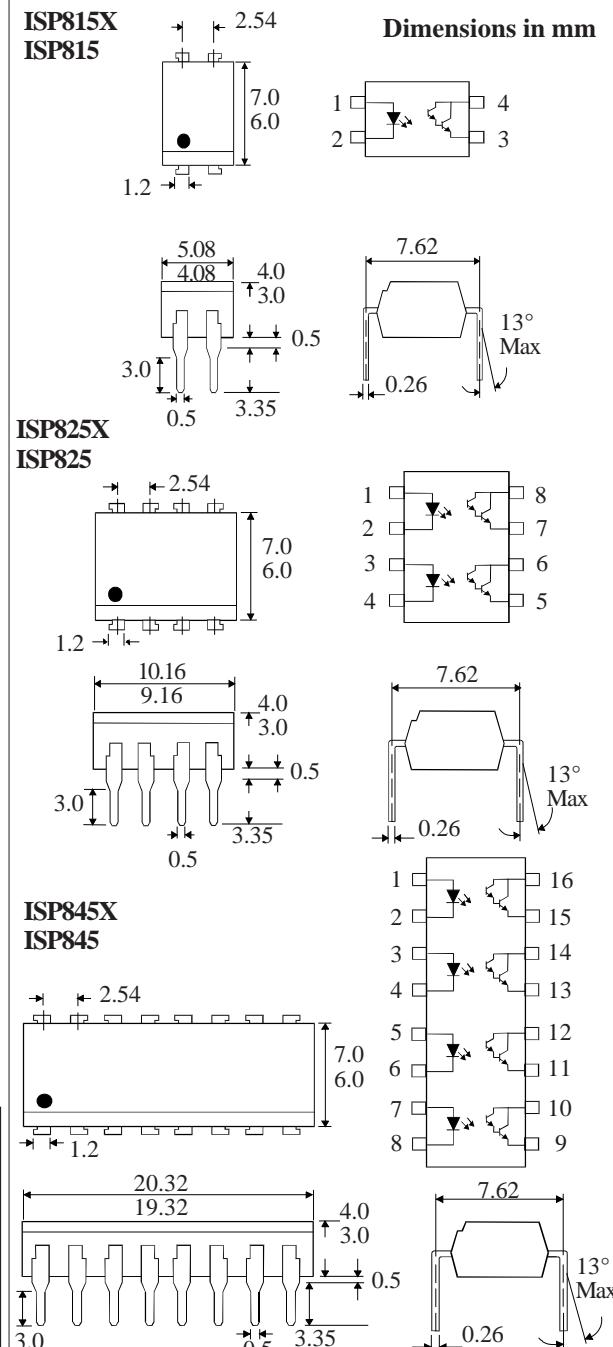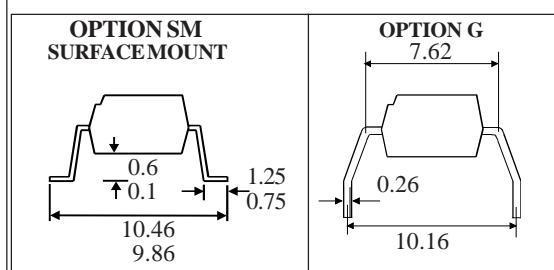

**ISOCOM COMPONENTS LTD**  
Unit 25B, Park View Road West,  
Park View Industrial Estate, Brenda Road  
Hartlepool, Cleveland, TS25 1UD  
Tel: (01429) 863609 Fax: (01429) 863581

**ABSOLUTEMAXIMUMRATINGS**  
(25°C unless otherwise specified)

Storage Temperature	-55°C to +125°C
Operating Temperature	-30°C to +100°C
Lead Soldering Temperature (1/16 inch (1.6mm) from case for 10 secs)	260°C

**INPUTDIODE**

Forward Current	50mA
Reverse Voltage	6V
Power Dissipation	70mW

**OUTPUTTRANSISTOR**

Collector-emitter Voltage BV <sub>CEO</sub>	35V
Emitter-collector Voltage BV <sub>ECO</sub>	6V
Collector Current	80mA
Power Dissipation	150mW

**POWERDISSIPATION**


Total Power Dissipation	200mW
(derate linearly 2.67mW/°C above 25°C)	

**ELECTRICAL CHARACTERISTICS ( T<sub>A</sub> = 25°C Unless otherwise noted )**

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V <sub>F</sub> )		1.2	1.4	V	I <sub>F</sub> =20mA
	Reverse Current (I <sub>R</sub> )			10	µA	V <sub>R</sub> =4V
Output	Collector-emitter Breakdown (BV <sub>CEO</sub> ) ( Note 2 )	35			V	I <sub>C</sub> =1mA
	Emitter-collector Breakdown (BV <sub>ECO</sub> )	6			V	I <sub>E</sub> =100µA
	Collector-emitter Dark Current (I <sub>CEO</sub> )			100	nA	V <sub>CE</sub> =20V
Coupled	Current Transfer Ratio (CTR) (Note 2)	600		7500	%	1mA I <sub>F</sub> , 2V V <sub>CE</sub>
	Collector-emitter Saturation Voltage V <sub>CE(SAT)</sub>			1.0	V	20mA I <sub>F</sub> , 5mA I <sub>C</sub>
	Input to Output Isolation Voltage V <sub>ISO</sub>	5300 7500			V <sub>RMS</sub> V <sub>PK</sub>	See note 1 See note 1
	Input-output Isolation Resistance R <sub>ISO</sub>	5x10 <sup>10</sup>			Ω	V <sub>IO</sub> =500V (note 1)
	Output Rise Time tr Output Fall Time tf		60 53	300 250	µs	V <sub>CE</sub> =2V, I <sub>C</sub> =10mA, R <sub>L</sub> =100Ω

Note 1 Measured with input leads shorted together and output leads shorted together.

Note 2 Special Selections are available on request. Please consult the factory.

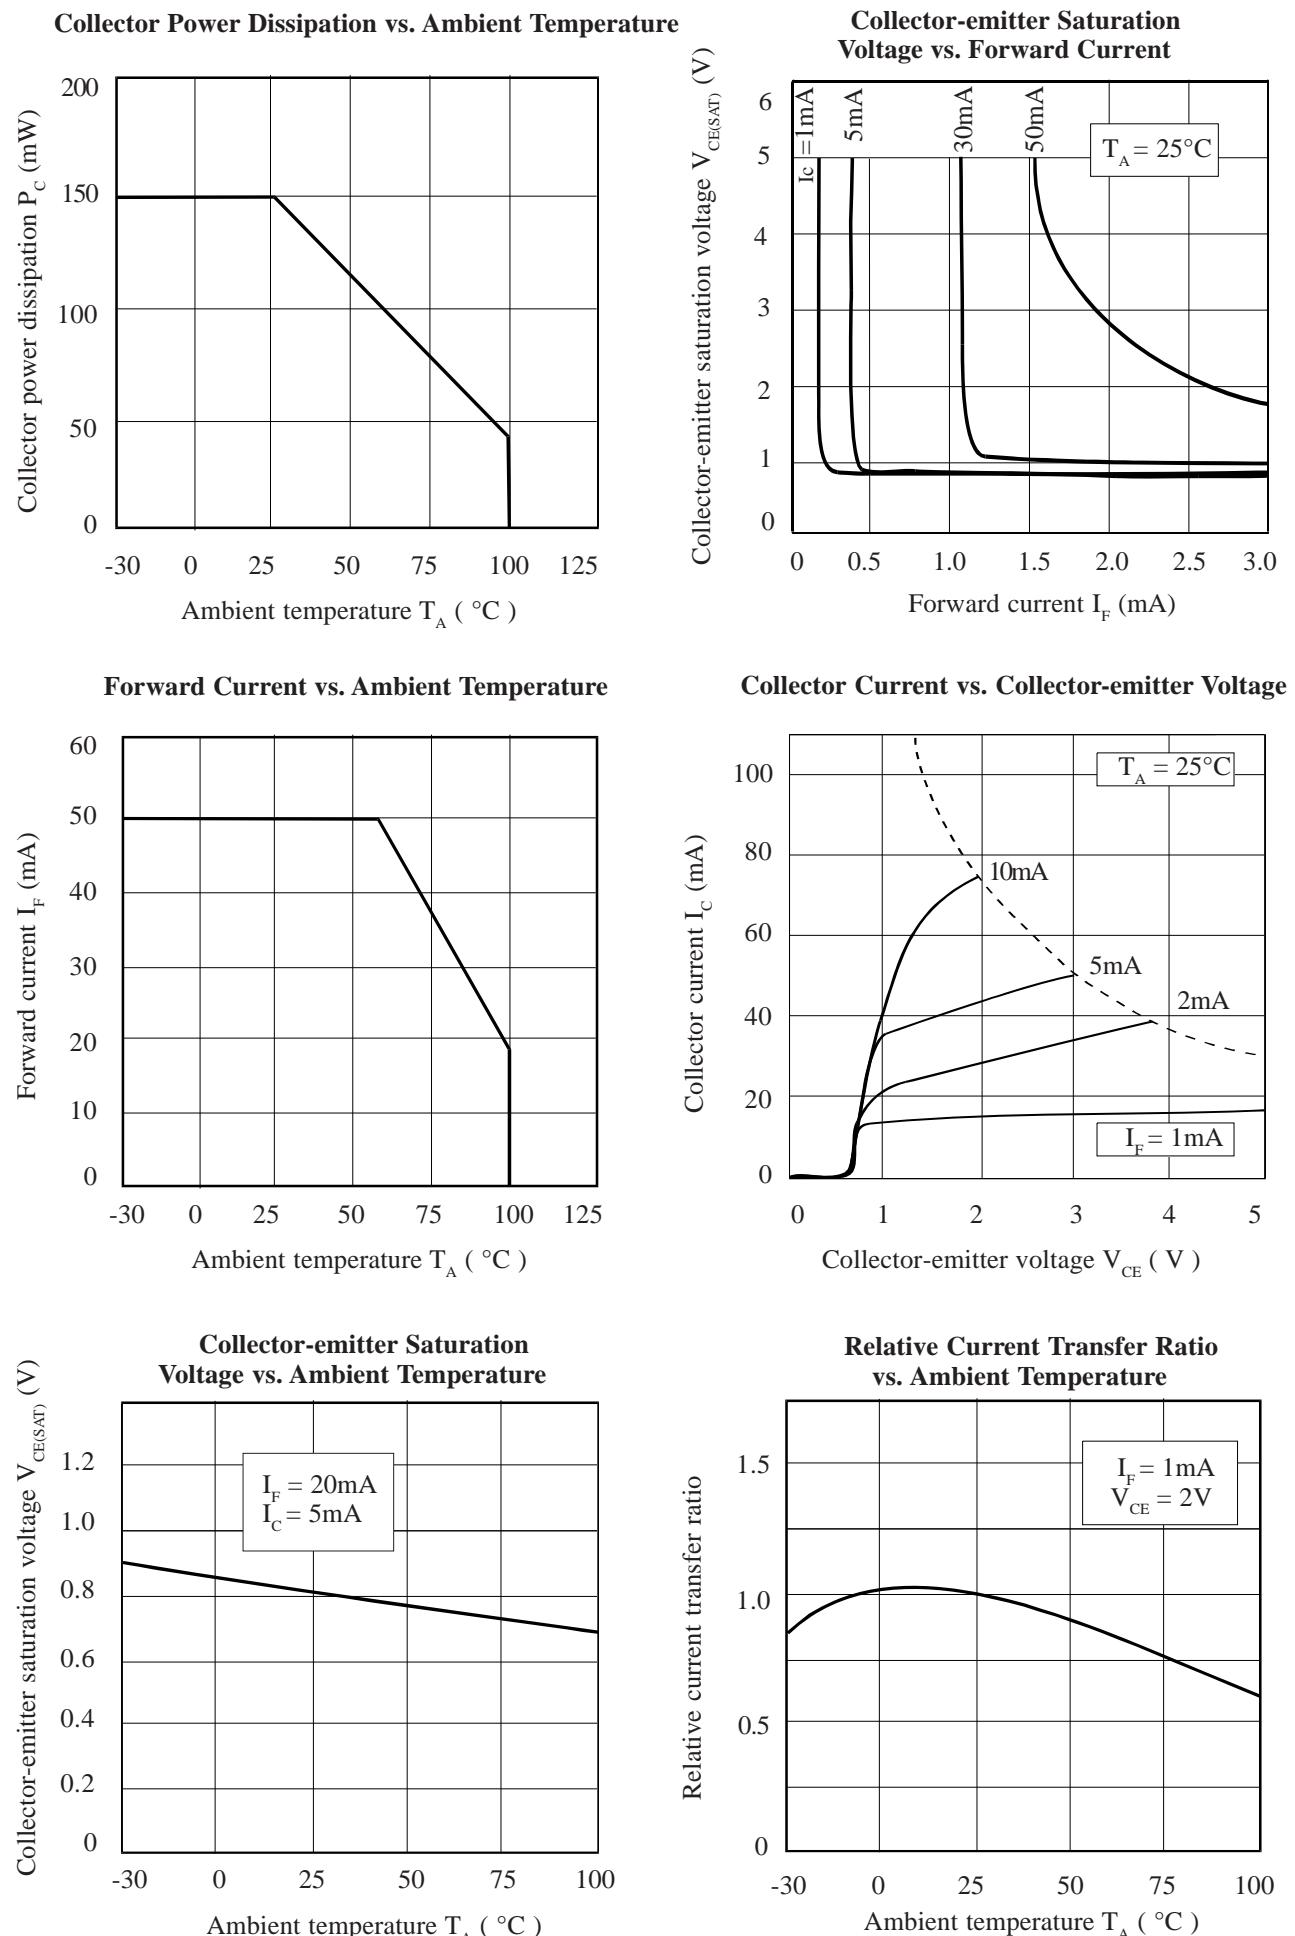

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for [isocom](#) manufacturer:***

Other Similar products are found below :

[SFH615A-2SM](#) [H11A1](#) [MOC3021M](#) [ISD74X](#) [IS60SM](#) [MOC3043X](#) [ICPL4503SM](#) [PS2505-4](#) [MOC3021XSM](#) [MOCD207](#) [ISP620-1X](#)  
[IS60SMT&R](#) [MOC3083](#) [MOC3021X](#) [SFH617A-4X](#) [MOC3081M](#) [ICPL2531SM](#) [PS2502-2](#) [MOC3043M](#) [PS2502-2SM](#) [ILQ74X](#) [ICPL2601](#)  
[4N25X](#) [IS181C](#) [PS2502-4SM](#) [ICPL2530SM](#) [MOC3041SM](#) [ISQ74X](#) [CNY17-2XSM](#) [CNY17-1XSM](#) [MOC3023M](#) [H11AA1XSM](#) [ISQ2X](#)  
[PS2505-4SM](#) [TIL199](#) [MOC3020X](#) [4N32FSM](#) [4N35X](#) [H21A3](#) [IS281C](#) [MOC3061X](#) [ISP817B](#) [MOC3041M](#) [ICPL2631](#) [ICPL2631SM](#)  
[ILQ1XSM](#) [MOC3022X](#) [CNY17F-3X](#) [ISP06SM](#) [ISP521-1XSM](#)