


## CT105 SERIES 3 PHASE MOULDED CASE CURRENT TRANSFORMERS

### DESCRIPTION

Miniature three phase current transformers suitable for primary ranges from 100A-250A with 5A secondary. Supplied with terminal cover and choice of fixings.

### APPLICATION

For installation onto cables or 25mm maximum busbars. The products have an overall width of 105mm allowing installation directly on top of moulded case circuit breakers.

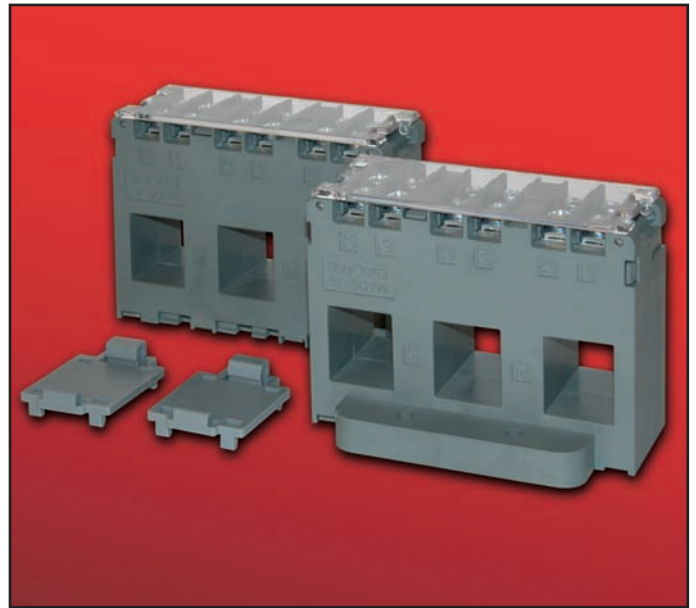

### TECHNICAL SPECIFICATION

- Conforms to IEC 185, BS 7626, BSEN 60044-1 and IEC 60044-1.
- Rated system voltage 0.72/3kV.
- Ambient temperature range -30°C to 80°C.
- Frequency range 50-60Hz.
- Insulation level 3kV for 1 minute.
- Continuous current 1.2 x rated current.


### RANGE

PRIMARY CURRENT	FOOT MOUNTED PART No.	DIN RAIL MOUNTED PART No.
100A	CT105F-100/5-2.5/1	CT105D-100/5-2.5/1
125A	CT105F-125/5-2.5/1	CT105D-125/5-2.5/1
150A	CT105F-150/5-2.5/1	CT105D-150/5-2.5/1
160A	CT105F-160/5-2.5/1	CT105D-160/5-2.5/1
200A	CT105F-200/5-2.5/1	CT105D-200/5-2.5/1
250A	CT105F-250/5-2.5/1	CT250D-250/5-2.5/1

NOTE: Foot mounted versions supplied as standard unless specified on orders.

All models are 2.5VA class 1.

### DIMENSIONS (mm)

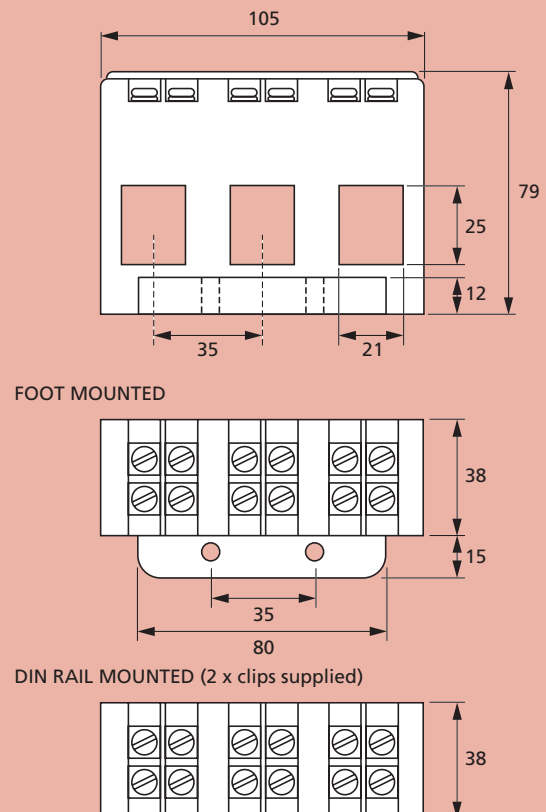

Our policy is one of continuous development and therefore specifications may change without notice.

## HOWARD BUTLER LTD

CROWN WORKS, LINCOLN ROAD  
WALSALL WS1 2EB ENGLAND

Tel: 01922 640003 Fax: 01922 723626

International Tel: +44 1922 640003 E-mail: sales@hobut.co.uk

<http://www.hobut.co.uk>

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [hobut](#) manufacturer:*

Other Similar products are found below :

[PD72MIS500V/2/938-658](#) [M850-LTHN-RS-PO](#) [D48A25](#) [SHB60A60-CLASS 1](#) [CT132TRAN10A-5/10V](#) [CT105F-150/5-2.5/1](#) [D72M50](#)  
[CT105F-100/5-2.5/1](#) [CT160-5-H7](#) [F3PAM602-15V](#) [CT132TRAN20A-4/20MA](#) [D72D60ADC](#) [F3PAM602-10A](#) [F3PAM602-20A](#)  
[F3PAM602-5A](#)