


Farnell NO.	8706646	8706654	8706662
L ± T (mm)	500 ± 5	1000 ± 10	2000 ± 20
Farnell NO.	8706670	8706689	8706697
L ± T (mm)	3000 ± 30	5000 ± 40	10000 ± 70


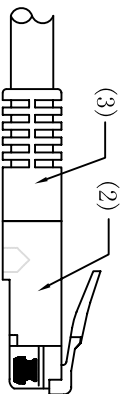


SIDE: B

SIDE: A

NOTE:

- (1). Cable Wiring: CAT. 5E UTP Stranded 24AWG(7\*0.18CU)\*4P  
Jacket Material:LSOH OD:5.0 ± 0.20mm  
Cable Colour:GREY  
Cable Printing: System Cable UTP CAT 5E 4 Pairs 24AWG  
Stranded ISO 11801 100MHZ
- (2). Connector A&B: RJ45(8P8C) Male Type  
INSULATION:Clear Polyester  
CONTACTS:Brass,Gold Plated
- (3). Over Mold: PVC, GREY
- (4). Parameter Settings: UT8080M  
1. Conductive Resistance:1kΩ  
2. Insulative Resistance:5MΩ (Min.)
- (5). Packing: POLYBAG PACKING

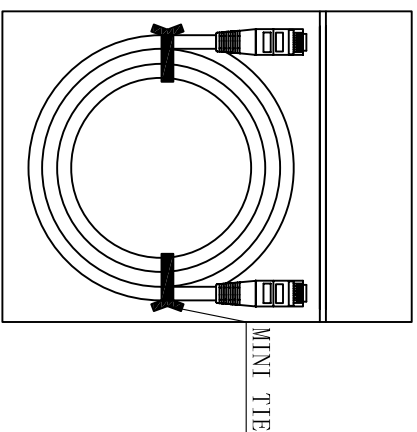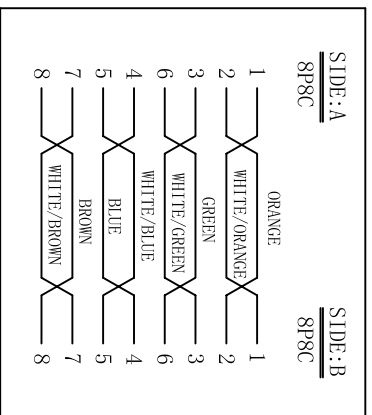

PIN OUT: (4)

PACKING: (5)

GENERAL TOLERANCES  
(UNLESS SPECIFIED)

**Pro-SIGNAL**

LENGTH: X, ± 1

.X ± 0.2


.XX ± 0.10

ANGLE: X°, ± 1°

.X° ± 0° 30'

UNIT: mm

REV: 0/A



DRAWING OVF

S. P. NO.

NAME

CAT. 5E UTP CABLE(24AWG CD)

CHECK

P. O. NO.

DWG. NO.

APPROVE

SIZE

PAGE

1/1

0	2011/12/20	
REV	DESCRIPTION	DATE

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [pro signal manufacturer](#):*

Other Similar products are found below :

[KVM-404](#) [JR8030/25M](#) [MJ-2325](#) [AV02019](#) [MC34967](#) [MC34971](#) [ABI-049-RC](#) [SVC675S-10M](#) [11.99.8870](#) [PSG01592](#) [PSG01567](#)  
[PSG01546](#) [PSG01522](#) [PS11468](#) [PS11199](#) [PS11072](#) [PS11360](#) [PS11156](#) [PS11147](#) [PS11022](#) [PSG03905](#) [PSG00559](#) [PSG00564](#) [PS000177](#)  
[PHONO PLG-PLG 10M](#) [AV02560](#) [AV02595](#) [ABM-710-RC](#) [USB-0039DBL](#) [PSG90957](#) [PSG01495](#) [PSG01462](#) [PS11386](#) [PS11028](#) [PS11179](#)  
[RP004](#) [PSG90986](#) [27-9650](#) [PSG02699](#) [USB2.0EX0104](#) [ABS-237-RC](#) [JR8013-10M](#) [JR8009/5M](#) [LS00532](#) [AVVCL65](#) [LCL](#) [PSG90820](#)  
[PSG01544](#) [PS11161](#) [PSG00562](#)