

IS-120

Tilt Sensor

IS Series


- Mercury free
- Compact design
- Reed Switch reliability



The IS-120

From our range of tilt switches offering design engineers reed switch reliability for low load switching.

dimensions

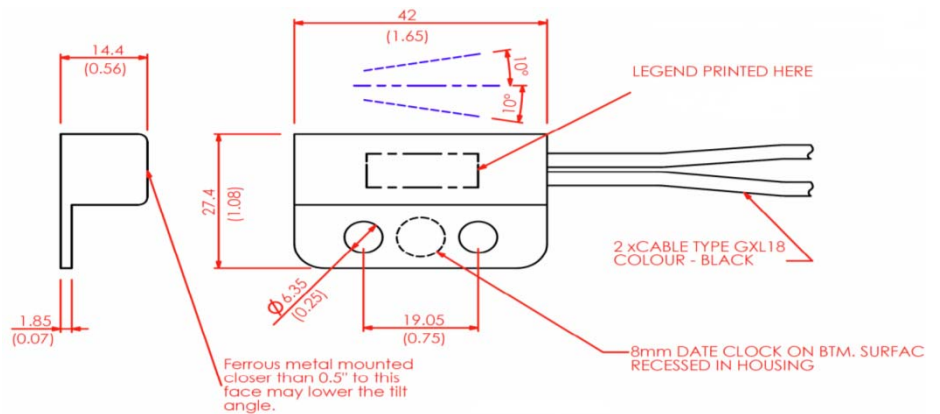

FEATURES

- Operates in Vertical Axis
- Operate (contacts close) before -10°
- Release (contacts open) before +10°
- Lead end of sensor downward causes switch closure

APPLICATIONS

- Truck bonnet position
- Robotic arm position
- Container lid position

performance specifications

Material, Design and Operation

Mounting	Vertical
Housing Material	Nylon 6.6
Housing Colour	Black
Fitting	Surface
Switch Action	SPST
Contact Form	A
Contact Material	Ruthenium
Maximum Switching Volts (VAC)	N/A
Maximum Switching Volts (VDC)	48
Maximum Switching Current (Amp)	0.5
Maximum Power (Watt)	10
Connection Type	Stripped Cables
Cable Type	18GXL SAE J-1128
Cable Length	2 x 0.5M single insulated
Cable Colour	Black/Black
Operate Temperature Range	-40°C to +125°C
Shock / Vibration	Vertical Mount, 30g for 11ms half sine
Operate Mode	Operate <-10°, Release <+10°
IP Rating	IP65

The information in this sheet has been carefully reviewed and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Furthermore, this information does not convey to the purchaser of such devices any license under the patent rights to the manufacturer. Measurement Specialties, Inc. reserves the right to make changes without further notice to any product herein. Measurement Specialties, Inc. makes no warranty, representation or guarantee regarding the suitability of its product for any particular purpose, nor does Measurement Specialties, Inc. assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability, including without limitation consequential or incidental damages. Typical parameters can and do vary in different applications. All operating parameters must be validated for each customer application by customer's technical experts. Measurement Specialties, Inc. does not convey any license under its patent rights nor the rights of others.

ordering info

The IS-120 is from our IS Series of Tilt Sensors.

The Series is available in alternative with a number of standard options including:

- Operate Angle
- Cable Termination

Please see the IS Series part number tree.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [measurement specialties manufacturer](#):

Other Similar products are found below :

[G-NSDPG2-001](#) [R-10331-4F6](#) [MSP-300-2K5-P-4-N-1](#) [PT8420-0030-821-1121](#) [US381-000005-015PG](#) [M5851-000005-05KPG](#) [LM31-00000F-002PG](#) [02560927-000](#) [86-050A-R](#) [D5154-000005-005PD](#) [M5852-000005-10KPG](#) [U5254-000002-.14BG](#) [33A-002D](#) [FPP800KIT1](#) [RT8420-0005-111-1110](#) [P983-0005-150BAS](#) [G-NSMIS-008](#) [FC2331-0000-0650-L](#) [EXFTC-200N-C20007](#) [EPX-500PG-C10003](#) [05282976-006](#) [3-1004346-0](#) [SR1A-125](#) [A8003HS22P1](#) [8101-0040Z-120](#) [FX292X-040B-0010-L](#) [04160001-010](#) [CLWG-150-MC4](#) [66530072-000](#) [FN3030-A1-100N](#) [PT101-0015-111-3110](#) [G-NSMIS-003](#) [PT8420-0005-111-1112](#) [04-0882-0237](#) [05282947-012](#) [02560412-006](#) [02560398-000](#) [04-1103-0048](#) [04-0847-0023](#) [04-0979-1307](#) [02560618-000](#) [GCD-121-125](#) [86-100G-R](#) [M3021-000005-01KPG](#) [4425-001D](#) [3038-0100](#) [M5842-000005-10KPG](#) [82-050G-RT](#) [33A-100D](#) [M5244-000002-350BG](#)