




THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.

**RoHS Compliant** ✓


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
F	ECN 3142: CN RELEASE. REVISE TO HAVE NEW MOLDS	1/7/08	D.FRISIELLO
G	ECN 5868: ADDED LENGTHS, NEW FORMAT, REVISED NOTE 4, ADD NOTE 5	12/2/11	D.FRISIELLO
H	ECN5915: REVISED END VIEW OF USB TYPE A MALE	01/10/12	DFP
J	ECN6237: ADDED CONTACT PLATING NOTE. UPDATED FORMAT.	09/14/12	DFP

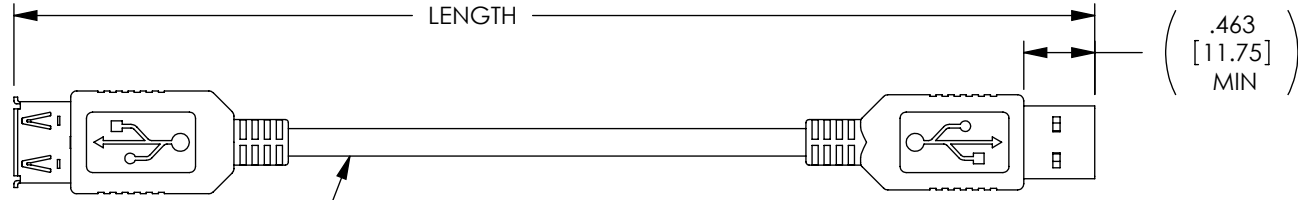



ONE 28AWG STRANDED TINNED COPPER TWISTED PAIR  
TWO 20AWG STRANDED TINNED COPPER CONDUCTORS  
OVERALL ALUMINIZED POLYESTER SHIELD WITH DRAIN  
WIRE PLUS TINNED COPPER BRAIDED SHIELD.  
PVC OUTER JACKET, LIGHT GRAY (PANTONE 400C)



"P1"  
SERIES "A"  
USB PLUG  
CONTACTS: 30 μINCHES  
GOLD PLATING



"J1"  
SERIES "A"  
USB RECEPTACLE  
CONTACTS: 30 μINCHES  
GOLD PLATING

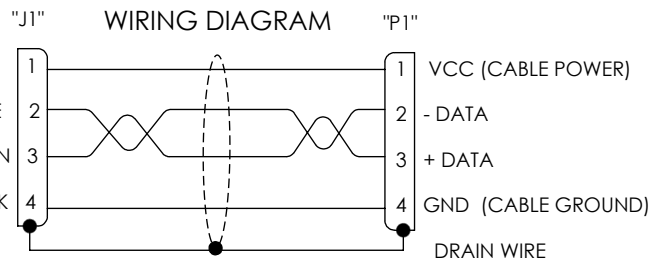

MODEL NUMBER	LENGTH	
	METERS	FEET
CSMUAX-03M	0.3	.98
CSMUAX-05M	0.5	1.64
CSMUAX-075M	0.75	2.46
CSMUAX-1M	1.0	3.28
CSMUAX-2M	2.0	6.56
CSMUAX-3M	3.0	9.84



NOTES:

1. CABLE ASSEMBLY SHALL HAVE 360° SHIELD TERMINATION.
2. CABLE ASSEMBLY SHALL MEET USB 2.0 REQUIREMENTS.
3. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
4. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES [mm] OVERALL CABLE LENGTH TOLERANCE: ≤12 [305] = +1 [25] / -0 >12 [305] ≤60 [1524] = +2 [51] / -0 >60 [1524] ≤120 [3048] = +4 [102] / -0 >120 [3048] ≤300 [7620] = +6 [152] / -0 >300 [7620] = +3% / -0%	APPROVALS	DATE	<b>L-com</b> Global Connectivity	45 BEECHWOOD DRIVE NORTH ANDOVER, MA 01845
	DRAWN BY D.PARHAM	03/08/2002		
ALL OTHER DIMENSIONAL TOLERANCES: .X = ±.2 .XX = ±.02 .XXX = ±.005	CHECKED BY T.CLARK	03/08/2002	CATEGORY	
	APPROVED BY R.CARRICK	03/08/2002	USB	
PROJECTION 	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	PRODUCT DESCRIPTION		
COLOR VARIATIONS MAY OCCUR	SIZE <b>A</b>	FSCM NO. <b>43321</b>	CABLE, USB TYPE A M/F EXT	
REF	SCALE: NONE	CAD FILE: CSMUAX.SLDDRW	DWG. NO. CSMUAX	REV. <b>J</b>
			SHEET 1 OF 1	

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [l-com manufacturer](#):*

Other Similar products are found below :

[FOA-550A](#) [UMC-201](#) [CSMN50MF-5](#) [CSMNB15MF-15](#) [TRD815RA2BL-5](#) [CA3A-90DA-1M](#) [CTLF3VGAMM-20](#) [HDCAMM-3](#)  
[U3A00014-03M](#) [ECF-SK-25](#) [CSMT15MF-10](#) [CSMT15MM-15](#) [CSMT15MM-25](#) [CSPL15MF-50](#) [CSPL25MF-25](#) [CSPL9MF-10](#) [CSPL9MF-5](#) [CSPL25MF-5](#) [CSPL25MF-2.5](#) [AL-IPEPS](#) [NB201611-10F-1](#) [TDG1026KC5-MNL](#) [NB121005-10F](#) [TRD855SRA6DBL-10M](#)  
[TRD855SRA7DBL-1M](#) [TRD855SRA7DBL-10M](#) [PR175SCDLCQ24](#) [TRG508-T4T-3M](#) [TRA5261-15F](#) [TRA5261S-1F](#) [TRA6261-1F](#)  
[USBBFT](#) [DGB25M](#) [CASATAL-18](#) [CSM25MM-10](#) [CSM37MF-10](#) [CSUSB-100](#) [CA3A-90RA-1M](#) [CA3A-90RMICB-1M](#) [U2A00003-3M](#)  
[U3A00003-05M](#) [U2A00008-12I](#) [U3A00007-075M](#) [U3A00007-1M](#) [CSMT15MF-5](#) [CSMT15MM-50](#) [CSPL15MF-25](#) [LPXT-WP-PMT](#)  
[CSMT15MF-50](#) [CSPL15MF-2.5](#)