

SECTION 2 PCB TERMINAL BLOCKS

3.5mm Pitch **Ultra Low Profile** Rising Clamp Terminal 3882639 + 3882640

Features

- 2-12 pole interlocking
- Ultra low profile
- Moulded in green UL94-V0 flame retardant PA66
- Professional rising clamp terminals
- 0.75mm² cable entry
- V & CE approved
- cUL applied for
- Captive screws
- Guided pin alignment
- Double interlock mechanism for increased strength


CTB0305



| Type No. | Poles | Length |
|------------|-------|--------|
| CTB0305/2 | 2 | 7mm |
| CTB0305/3 | 3 | 10.5mm |
| CTB0305/4 | 4 | 14mm |
| CTB0305/5 | 5 | 17.5mm |
| CTB0305/6 | 6 | 21mm |
| CTB0305/7 | 7 | 24.5mm |
| CTB0305/8 | 8 | 28mm |
| CTB0305/9 | 9 | 31.5mm |
| CTB0305/10 | 10 | 35mm |
| CTB0305/11 | 11 | 38.5mm |
| CTB0305/12 | 12 | 42mm |

Specification

| | |
|---------------------------|--|
| Rating | 9A/130Vac |
| Dielectric strength | 1.5kV/60sec |
| Insulation resistance | ≥ 5MΩ |
| Working temperature | -20°C to 125°C |
| Short period | 160°C |
| Moulding | UL94-V0 flame retardant PA66 |
| Pin/terminal | 5μ tinned, nickel plated brass |
| Rising clamp | Nickel plated brass |
| Screw/torque | M2 steel, 6μ zinc colour passivated and tropicalised/0.3Nm |
| Recommended PCB hole size | ø1.1mm |

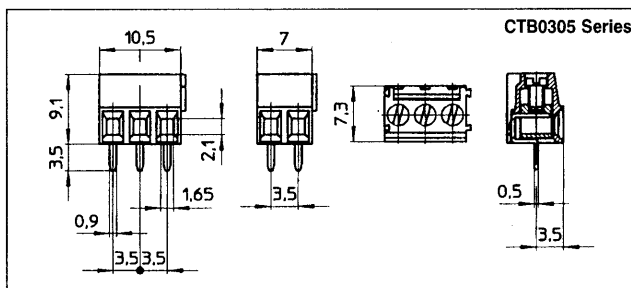


3.5mm Pitch **Ultra Low Profile 90°** Rising Clamp Terminal

Features

- 2-12 pole interlocking
- Ultra low profile
- Moulded in green UL94-V0 flame retardant PA66
- Professional rising clamp terminals
- 0.75mm² cable entry
- V & CE approved
- cUL applied for
- Captive screws
- Guided pin alignment
- Double interlock mechanism for increased strength


CTB0355



| Type No. | Poles | Length |
|------------|-------|--------|
| CTB0355/2 | 2 | 7mm |
| CTB0355/3 | 3 | 10.5mm |
| CTB0355/4 | 4 | 14mm |
| CTB0355/5 | 5 | 17.5mm |
| CTB0355/6 | 6 | 21mm |
| CTB0355/7 | 7 | 24.5mm |
| CTB0355/8 | 8 | 28mm |
| CTB0355/9 | 9 | 31.5mm |
| CTB0355/10 | 10 | 35mm |
| CTB0355/11 | 11 | 38.5mm |
| CTB0355/12 | 12 | 42mm |

Specification

| | |
|---------------------------|--|
| Rating | 9A/130Vac |
| Dielectric strength | 1.5kV/60sec |
| Insulation resistance | ≥ 5MΩ |
| Working temperature | -20°C to 125°C |
| Short period | 160°C |
| Moulding | UL94-V0 flame retardant PA66 |
| Pin/terminal | 5μ tinned, nickel plated brass |
| Rising clamp | Nickel plated brass |
| Screw/torque | M2 steel, 6μ zinc colour passivated and tropicalised/0.3Nm |
| Recommended PCB hole size | ø1.1mm |



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [camden manufacturer](#):

Other Similar products are found below :

[412689X](#) [CTBP92VE/12R](#) [CTBP9350/12](#) [IND515205-240-T/GRN](#) [IND515205-240-T/RD](#) [IND5032405-240-T/GRN](#) [CE10.00.EI](#)
[C192SHAND](#) [CNMB/6ST/2](#) [CNMB/4ST/2](#) [CSACST004](#) [CTBP9200/9](#) [CIME/M/BE2250SS](#) [CHH64E1BL](#) [CIM/15W-DMFS](#) [CHHBAT2GY](#)
[CFTBN/2](#) [CCB2S1/04](#) [CHDX6-221C](#) [CHDX8-224](#) [CHDASMP29](#) [CHDASMP34](#) [CHDX810DD](#) [CHDX811DD](#) [CCTTM40LR](#)
[CTBP92VJ/5S](#) [CTBP92VJ/8R](#) [CTSN431/12/M](#) [CTSN433/12/M](#) [CUABOX006](#) [CE10.00.FM](#) [CBRPH-BLK](#) [BIM2003/13-WH/WH](#)
[RX2008/S-5-WH](#) [CBARD-CAR](#) [CRDCG0007](#) [CNMB/4/KIT](#) [CTB5050/5](#) [CTBP92HE/11](#) [CTBP9358/10AO](#) [CHH66C2GY](#) [CHH456PBK](#)
[CHH451ABK](#) [CIM/9W-DMFS](#) [CIM/25W-DMFS](#) [RTM5006/16-NC-BLK](#) [IND5032405-125-T/AMB](#) [CCB1S1/03](#) [CCD2S1/04](#) [CCE1S1/05](#)