


# Magnet Mount Pt100, RTD Sensors


## PRMAG Series

- ✔ Measure Surface Temperature of Ferrous Materials
- ✔ Spring-Mounted Probe
- ✔ 100 Ω Class A Din Platinum Element
- ✔ 4-Wire Construction Standard
- ✔ Powerful 6 kg (13 lb) Pull Magnet
- ✔ Wide-Range of Leads Available

OMEGA's magnetic-mount temperature sensors are available with a wide range of lead wire insulations and terminations. Maximum temperature is 400°C (752°F). Select the version from the table below that best meets your needs.

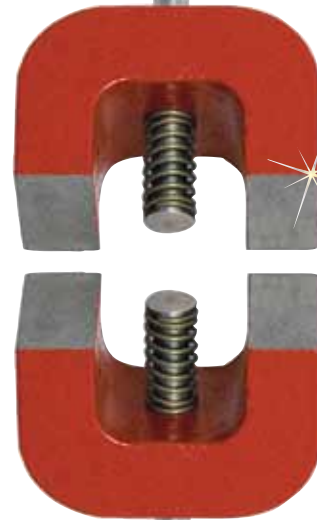

PRMAG-2-100-A-S-1M shown actual size.

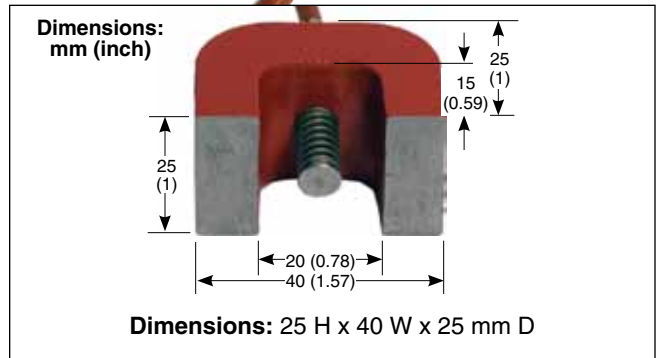

To Order			
Model No.	Accuracy	Cable	Cable Length
PRMAG-2-100-A-P-1M	Class A	PVC (100°C maximum)	1 m (40")
PRMAG-2-100-A-T-1M		PFA (250°C maximum)	
PRMAG-2-100-A-G-1M		Fiberglass (400°C maximum)	
PRMAG-2-100-A-GS-1M		Fiberglass with SST braid (400°C maximum)	
PRMAG-2-100-A-PS-1M		PVC with tinned copper braid (100°C maximum)	
PRMAG-2-100-A-TS-1M		PFA with SST overbraid (200°C maximum)	
PRMAG-2-100-A-S-1M		Silicone Rubber (200°C maximum)	

**Note:** For cable lengths greater than 1 meter, change length in model number to required length for an additional cost per meter: add cost per meter of PVC; add cost per meter of silicone; add cost per meter PFA; add cost per meter of fiberglass; add cost per meter of SST braided fiberglass; add cost per meter of braided PVC; add cost per meter of SST braided PFA cable. To add a connector termination, add cost for "OTP", "MTP" or TA3F connectors.

**Ordering Example:** PRMAG-2-100-A-P-1M, magnet mount probe with Class A Pt100 element and 1 m (40') of PVC insulated wire, terminated with stripped leads.

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [newport manufacturer](#):*

Other Similar products are found below :

[BDS1](#) [BDT1](#) [WTK-14-36/N](#) [5TC-TT-J-24-72](#) [TXDIN70](#) [OTP-U-F](#) [5SC-TT-K-30-36](#) [WTK-8-24/N](#) [TPJ-U-F](#) [OTP-U-M](#) [5TC-TT-J-24-50/N](#)  
[5SC-TT-T-30-72](#) [SMTC-AL-P](#) [SMPW-CC-T-M](#) [MPJ-K-F-ROHS](#)