

CRYSTAL CLOCK OSCILLATORS (SMD • Ceramic Package)

RoHS compliant

CSX-750F SERIES


2000pcs/reel




FEATURES

- Available to supply voltage 5.0V or 3.3V.
- Low current consumption with output enable function (OE) or stand by function (STAND-BY).
- Suitable for various applications such as communication devices, AV devices and measuring instruments.

DIMENSION [mm]

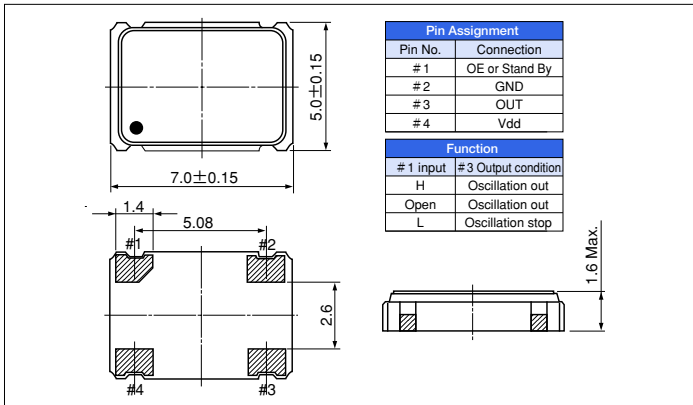

SOLDER PAD LAYOUT [mm]

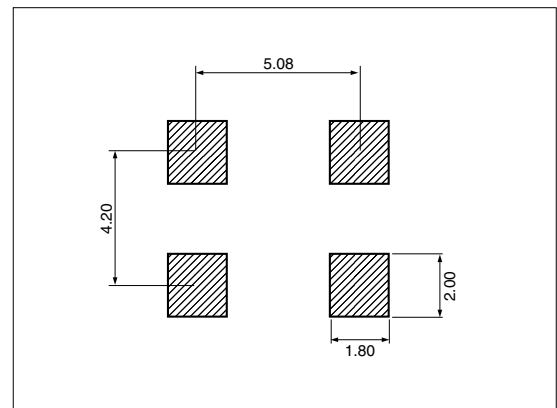

STANDARD SPECIFICATIONS * Model is determined by the selection for the output enable or stand-by function, the frequency stability and the supply voltage.

Item	Model	OE	CSX-750 FC (*)		CSX-750 FB (*)	CSX-750 FJ (*)
		STAND-BY				
Frequency Range			1.8432MHz~39.999MHz	40.000MHz~75.000MHz	1.8432MHz~39.999MHz	40.000MHz~80.000MHz
Supply Voltage			Vdd : 5.0V±0.5V		Vdd : 3.3V±0.3V	
Frequency Stability		(*)	B : ±50ppm, C : ±100ppm, E : ±50ppm (−40°C~+85°C), F : ±100ppm (−40°C~+85°C)			
Operating Temperature Range			−20°C~+70°C (−40°C~+85°C)			
Storage Temperature Range			−55°C~+125°C			
Current consumption			25mA Max.	45mA Max.	15mA Max.	25mA Max.
Duty	TTL level (1.4V)		40~60%		—	
	CMOS level (1/2 Vdd)		45~55%			
Output Voltage	V _{OH}		0.9Vdd Min.			
	V _{OL}		0.4V Max.		0.1Vdd Max.	
Output Load	TTL		10TTL Max.		—	
	CMOS		50pF Max.		30pF Max.	30pF Max.
Rise and Fall Time			8 nsec Max.	6 nsec Max.	8 nsec Max.	6 nsec Max.
Start-up time			4 msec Max.	10 msec Max.	4 msec Max.	10 msec Max.
Input Voltage	V _{IH}		2.0V Min.			0.7Vdd Min.
	V _{IL}		0.8 V Max.		0.4V Max.	0.3Vdd Max.
Disable current			10mA Max.	20mA Max.	5mA Max.	—
Stand-by current			—			10 μA Max.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [citizen manufacturer](#):

Other Similar products are found below :

[CSX-750FCC4000000T](#) [CSX-750FHB12000000T](#) [HC-49/U-S24000000ABJB](#) [CS325S14318180ABJT](#) [HC49US-28.224MABJ](#) [CM315](#)
[32.768KDZY-UT](#) [HC-49/U-S4915200ABJB](#) [CSX-750FBC16000000T](#) [HCM49-7.680MABJ-UT](#) [CM51932768DZFT](#) [HC49US-](#)
[28.63636MABJ](#) [HCM49-11.000MABJT](#) [CMR200T-32.768KDZF-UT](#) [HCM493579545ABJT](#) [CSX750FCC40.000M-UT](#) [HC49US-](#)
[6.176MABJ-UB](#) [HC49US-17.734475MABJ-UB](#) [CS325S-12000000ABJT](#) [HCM49-48.000MABJT](#) [HC49US-6.144MABJ](#) [HC49US-](#)
[10.000MABJ-UB](#) [CS325S27000000ABJT](#) [CS10-32.000MABJ-UT](#) [HC49US-4.9152MABJ-UB](#) [HCM49-11.0592MABJ-UT](#)
[CS325S28636300ABJT](#) [HCM49-6.144MABJ-UT](#) [HCM49-13.500MABJ-UT](#) [HC-49/U-S6144000ABJB](#) [CM1610H32768DZFT](#) [HC49US-](#)
[16.9344MABJ-UB](#) [HCM4950000000ABJT](#) [CSX-750FCC14745600T](#) [HC49US15.000MABJ-UB](#) [HCM4949152000ABJT](#) [HC49US-](#)
[12.000MABJ-UB](#) [HC49US-9.000MABJ](#) [HCM49-5.000MABJT](#) [HCM49-20.000MABJ-UT](#) [CM309E-15.000MABJ-UT](#) [HC49US-](#)
[19.6608MABJ-UB](#) [CMR200T32768DZFT](#) [HCM49-30.000MABJ-UT](#) [CSX-750FCC4000000T](#) [CSX-750FBC33333000T](#)
[HCM4924576000ABJT](#) [CSX-750FMB25000000T](#) [HC-49/U-S15000000ABJB](#) [HC49US-3.6864MABJ](#) [HC-49/U-S48000000ABJB](#)