

# Robust keypads for harsh industrial use

- Rapid, responsive and reliable data entry in wet, dirty or extreme conditions
- Vandal resistant (20J BS EN 60068-2-75: 1997)
- Weather, water and dust resistant (IP65)
- · 4 key, 12 key and 16 key formats

- Raised "home pip" on the "5" key
- Simple 'row and column' circuit matrix, terminated by a male, gold-plated, square pin, 0.1" (2.54mm) pitch connector with locking ramp
- Can be fixed to a flat surface or under panel mounted for a flush, low profile installation








### 2000 Series tough impact resistant keypads

Suitable for use in harsh industrial and exposed, outdoor environments. Typical applications include industrial process control, military equipment, instrumentation and access control. Constructed from an advanced super high impact polymer. These responsive keypads are built to survive.

045

27.50 (A. 12.8 16 KeV)

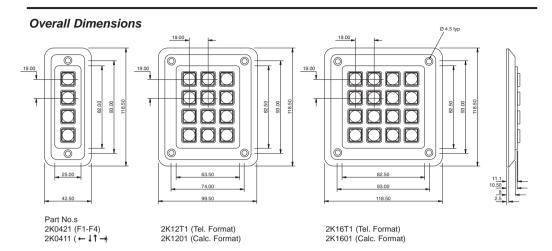



NTACT

ROW/ COLLIMN

common

#### **Connection Details** for 4 Key Keypad



5 4 3 2 1 (As viewed from rear of keypad)	COI MA
A 1	CONNEC. PIN
В	1
c	2
D	3
KEY LOCATION	4
(As viewed from front of keypad)	5

Connection Details for 12 Key Keypad	CONTACT MATRIX	
CONTACT CONNECTIONS	CONNEC. PIN	ROW/ COLUMN
8 7 6 5 4 3 2 1	1	Α
(As viewed from rear of keypad)	2	В
A 1 2 3	3	1
	4	2
	5	3
iHHH	6	-
KEY LOCATION	7	D
(As viewed from front of keypad)	8	С

wed from front of keypad)	8	С
,,,,,,		
nection Details 6 Key Keypad	CONTACT MATRIX	
CT CONNECTIONS	CONNEC. PIN	ROW/ COLUMN
6 5 4 3 2 1	1	Α
wed from rear of keypad)	2	В
2 3 4	3	1
ĒĔĖ	4	2
HHH	5	3

Storm Interface

. Oak Brook

UK Office:

600 Enterprise Drive

Tel: +1 (630) 472 5360

Fax: +1 (630) 472 5364

Tel: +44 (0)1895 431421

Fax: +44 (0)1895 431132

Illinois 60523 USA


Storm Interface

Bentinck Road West Drayton Middlesex UB7 7RQ

14 Bentinck Court

for 16 Key Keypad	CONTAC MATRIX	
CONTACT CONNECTIONS	CONNEC. PIN	CC
8 7 6 5 4 3 2 1	1	
(As viewed from rear of keypad)	2	П
A 1 2 3 4	3	П
	4	
CHHHH	5	
	6	
	7	
KEY LOCATION (As viewed from front of keypad)	8	

### Mounting & Connection Details

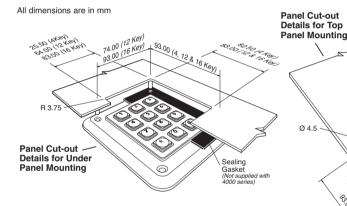

#### **Electrical**

Contact Bounce 5ms (max) Contact Resistance 100 ohms (max) 50 Mohms (min) Insulation Resistance Breakdown Voltage 500V AC (max 60 secs.) Operating Voltage 24V DC (max) Operating Current 50mA (max)

#### Mechanical

Operational Life 4 million cycles (min) per key Keytop Travel 1.4mm nominal Actuation Force 180gms nominal Connector 0.1" pitch, gold plated square pin, male connector

#### Environmental

Water / Dust Sealed IP65 (when mounted to suitable enclosure) Operational Temperature -25°C to +85°C (Dry)

#### Material

Casing	Super High Impact Polymer
	(mid grey)
Keytops	Super High Impact Polymer
	(mid grey)
Keytop Legends	Engraved
Contact Circuit	Gold on Nickel plated FR4

#### **Accessories** Stock No. 4200-000[x] PC Interface RS232 **Rear Casing** RC12020[x] Supplied complete with fixing hardware, Providing space for additional components sealing gaskets and fixing instructions. or circuitry (12 key formats only) Blank Keytops 1K0000[x] Supplied without keytop graphics. Suitable for engraving. set of four **Privacy Shield** 1KFS020[x] Supplied complete with fixing hardware, Provides PIN / Entry Code security sealing gaskets and fixing instructions. 12 key only.

Whilst every effort is made to ensure details are correct at time of print, specifications



July 2007

2000-LIT-01 Rev 3



Countersunk Fixing Screws (Not Supplied)

Sealing Gasket (Not supplied with 4000 series)

> Email: sales@storm-interface.com www.storm-interface.com

Email: sales.usa@storm-keypads.com

Storm Interface products include ology protected by international patents and design registration. All rights reserved.

are subject to change without notice.

FM 39602

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for storm interface manufacturer:

Other Similar products are found below:

1605-330013 FT1K0503 3K042103 3KLW041103 7207-0410203 7207-121W203 GS000201 3KLW120101 2210-452223 EZB6-430003 PLX041203 DEEX0103 DEGL12003 2K120103 4500-003 DE1KT103 DE2KT103 WE2KT103 8616-310023 7203-12T0203 1200-MK0003 DEL6003 PLX120203 2K12T103 5100-1003 5103-1003 8616-210023 RC120201 DR2KW203 EZB2-505H03 EZB6-530023 EZB2-405003 6000-210023 FT1K0803 FT4K0903 EZ08-23001 FT4K1003 2200-003003 3K160103 5100-0003 5100-FK03 5103-0103 DXPS1W303 7202-16T0203 8600-MK0003 WE1KT103 DEL12003 EZB6-630023 EZB6-630003 AT02-430016