
DALI magic USB interface | Components



Areas of application

- Diagnostics & configuration tool for DALI and 3DIM applications

DALI wizard software features (included)

- Intuitive configuration of up to 64 DALI electronic control gears
- Offline / Online configuration of DALI installations
- “DALI-Spy”-functionality for recording DALI line data flow

3DIM Tool software features

- Programming of OSRAM ECG with 3DIM functionality
- Visualization of customized AstroDIM and StepDIM operation

Product features


- Standard USB interface
- Central control, analysis and programming of DALI systems via Windows PC
- Independent of PC: Control device for switching & dimming DALI lighting systems

Technical data

Electrical data

Nominal voltage	220...240 V
Mains frequency	50...60 Hz
System wattage	7 W

Dimensions & weight

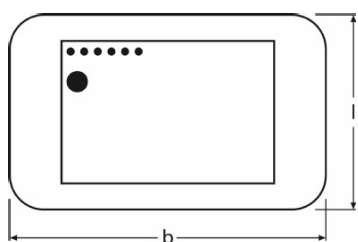

Product line drawing

Length	79.0 mm
Width	120.0 mm
Height	28.0 mm
Product weight	0.37 g

Colors & materials

Product color	White
---------------	-------

Capabilities

Dimming interface	DALI
-------------------	------









Certificates & standards

Type of protection	IP20
--------------------	------

Download Data

File
 Product Family Datasheet

Product datasheet

	Data sheet for product families OSRAM QT <i>i</i> (DALI)...DIM
	Brochures Non-system-specific components brochure
	Brochures LMS 3 DIM Flyer (GB)
	Brochures 3DIM - controll gears - Reliable, durable and efficient (G)
	Brochures 3DIM Application Guide (GB)
	Declarations of conformity Declaration of conformity DALI magic
	Installation/Operation notice Technical instruction
	CAD data 3-dim DALI MAGIC
	Product movie 3DIM Astro, StepDIM, DALI Video

References / Links

Configuration software available at

▶ www.osram.com/software

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [osram](#) manufacturer:

Other Similar products are found below :

[LS E65B-V1AB-1-1-50-R33-Z](#) [LO L296-Q2S1-24-Z](#) [IPD2131-27](#) [GW PSLPS1.EC-KSKU-5R8T-1](#) [418962A](#) [LCW JNSH.PC-CPCR-5H7I-1](#)
[LE RTDUW S2W](#) [LT A67C-S2U1-35](#) [4052899958142](#) [4052899958173](#) [4052899971028](#) [BPW 34 FASR](#) [BPW 34 FSR](#) [BPW 34 SR](#) [LT](#)
[A67C-T2V1-35](#) [GY CSHPM1.23-KQKS-36-0](#) [KW H5L531.TE-Z7R7-EBVFFCBB46-RS5R](#) [4058075097421](#) [79675](#) [79632](#) [OT 40/220-](#)
[240/24 DIM P](#) [OT 60/220-240/24 DIM P](#) [OT 100/220-240/24 DIM P](#) [OT FIT 45/220-240/200 D L](#) [KW2 HIL532.TK-D2D9-4L07M0-SC6B](#)
[LW TWTG.BB-BXCX-2B2C-1](#) [LA E6SF-BBCB-24-1-Z](#) [HDSP2112S](#) [LY E6SF-AABA-46-1-Z](#) [64760](#) [SFH 4715A-CBDA](#) [4058075097360](#)
[4058075097544](#) [47659](#) [OT 6/200-240/24 CE](#) [OT FIT 35/220-240/350 D CS L](#) [OT FIT 8/220-240/180 CS S MINI](#) [64150ULT](#) [79366](#)
[4052899917583](#) [4058075819658](#) [GW CSSRM2.PM-N3N5-XX51-1](#) [ELEMENT 90/220-240/24](#) [OT 40/220-240/24 P](#) [OT 60/220-240/24 P](#)
[ELEMENT 6/220-240/150 S](#) [64210CBI](#) [LY E67F-ABBB-46-1-Z](#) [LS T670-J1K2-1-Z](#) [LO L29K-H2L1-24-Z](#)