




Part Number: PRA 30/10

Proximity Switch - Reed Switch based

Cylindrical - Normally Open Contacts - Suggested Magnet: PRLM

Product Data Sheet

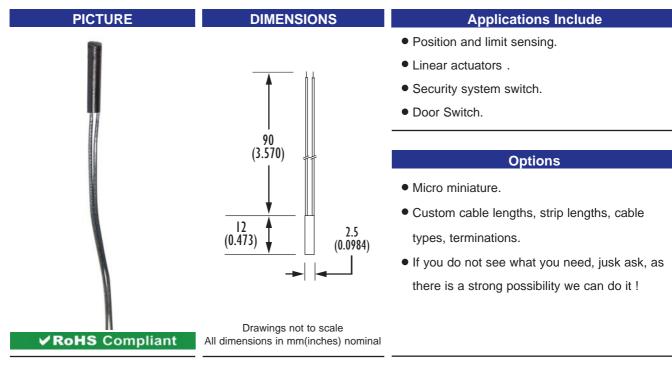

SPECIFICATION		
Contact Form / Style	Normally Open	
Switching Capacity (Resistive)	0.25 W/VA Max.	
Switching Voltage	30 VAC Max.	
Switching Current	0.01 A. Max.	
Carry Current	0.02 A. Max.	
Breakdown Voltage	150 VDC Min.	
Contact Resitance	500 mOhms Max.	
Switching Distance	5 mm Min.	
Operating Temperature Range	-20°C +70°C	
Storage temperature	-25°C +90°C	
Case Material	Black Polypropylene	
Cable	2 x 0.12mm ² PTFE Insulated Black	

Did you know we also sell?



Rev. No.	Revision Note	Date	Signature	
2	Datasheet Redesign	12-10-06	LG	



As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: +44 (0)1255 862236

www.assemtech.co.uk

Fax: +44 (0)1255 862014

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Proximity Sensors category:

Click to view products by Comus manufacturer:

Other Similar products are found below:

01.001.5653.1 70.340.1028.0 70.360.2428.0 70.364.4828.0 70.810.1053.0 72.360.1628.0 73.363.6428.0 9221350022 980659-1 QT-12 E2EX10D1NN E2E-X14MD1-G E2E-X2D1-G E2EX2ME2N E2E-X3D1-N 10M E2E-X4MD1-G E2FMX1R5D12M E2K-F10MC1 5M E11204TBOSL-6 EI5515NPAP BSA-08-25-08 IC08ANC15PO-K IMM2582C 25.161.3253.0 25.332.0653.1 25.352.0653.0 25.352.0753.0 25.523.3253.0 9151710023 922FS1.5C-A4P-Z774 SC606ABV0S30 SM952A126100LE A1220EUA-T F3S-A162-U CL18 QT-08L 34.110.0010.0 TL-C2MF1-M3-E4 IA08BLF15NOM5 IA08BSF15NOM5 IA12ASF04DOM1 IMM32188C IS2 IS31SE5000-UTLS2-TR 34.110.0021.0 34.110.0022.0 CA150-120VACDC VM18VA3000Q XS508BSCBL2 XS512BLNAM12