



Part Number: PRA 175/10

**Proximity Switch - Reed Switch based** 

Miniature Cylindrical - Normally Open Contacts

# PICTURE

**✓ RoHS** Compliant


### **APPLICATIONS INCLUDE**

- · Position and limit sensing
- Linear actuators
- · Security system switch
- Door Switch

## **FEATURES**

- Micro miniature
- Custom cable lengths, strip lengths, cable types, terminations.
- If you do not see what you need, just ask, as there is a strong possibility we can do it !

## **DIMENSIONS**

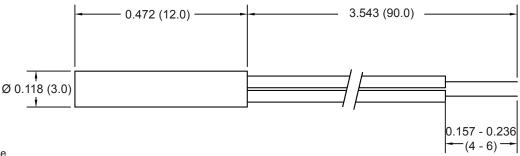

Drawings not to scale.

All dimensions in inches (mm) nominal.

SPECIFICATION	
Contact Form / Style	Normally Open
Switched Power MAX	5 W
Switched Voltage DC MAX	175 V
Switched Voltage AC, RMS value MAX	140 V
Switched Current DC, mA MAX	350 mA
Switched Current AC, RMS value MAX	250 mA
Carry Current DC MAX	0.5 A
Breakdown Voltage MIN	230 V
Contact Resistance (Initial Typ.)	140 mOhm
Wire	28 AWG PTFE
Housing	Polypropylene
Operating Temperature	-20° +70°C
Suggested Magnet	PRLM
Operating Distance MIN	4mm

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and the details of our full design and manufacturing service. All products are supplied to our standard conditions of sale unless otherwise agreed in writing.

Phone: (1) 973 777 6900

www.comus-intl.com

Fax: (1) 973 777 8405

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Proximity Sensors category:

Click to view products by Comus manufacturer:

Other Similar products are found below:

01.001.5653.1 70.340.1028.0 70.360.2428.0 70.364.4828.0 70.810.1053.0 72.360.1628.0 73.363.6428.0 9221350022 980659-1 QT-12 E2EX10D1NN E2E-X14MD1-G E2E-X2D1-G E2EX2ME2N E2E-X3D1-N 10M E2E-X4MD1-G E2FMX1R5D12M E2K-F10MC1 5M E11204TBOSL-6 EI5515NPAP BSA-08-25-08 IC08ANC15PO-K IMM2582C 25.161.3253.0 25.332.0653.1 25.352.0653.0 25.352.0753.0 25.523.3253.0 9151710023 922FS1.5C-A4P-Z774 SC606ABV0S30 SM952A126100LE A1220EUA-T F3S-A162-U CL18 QT-08L 34.110.0010.0 TL-C2MF1-M3-E4 IA08BLF15NOM5 IA08BSF15NOM5 IA12ASF04DOM1 IMM32188C IS2 IS31SE5000-UTLS2-TR 34.110.0021.0 34.110.0022.0 CA150-120VACDC VM18VA3000Q XS508BSCBL2 XS512BLNAM12