



# SERIES N 75 Ω COAXIAL CONNECTORS


## Description

SUHNER N connectors are available with 50 Ω and 75 Ω impedance. The SUHNER N 75 Ω connectors are suitable for applications up to 1.5 GHz. The screw-type coupling mechanism provides a sturdy and reliable connection. SUHNER N 75 Ω connectors are available in many different patterns.

## Compatibility

Center conductors of N 75 Ω connectors have a smaller diameter than those of the 50 Ω version. Therefore 50 Ω and 75 Ω connectors must not be mated with each other.

## Interface Dimensions

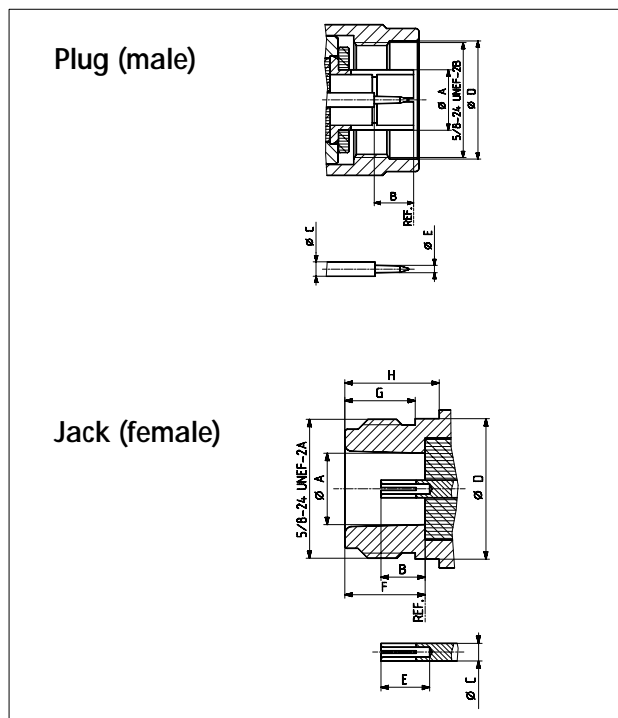

## Interface Dimensions in mm / inches

	Plug		Jack	
	min.	max.	min.	max.
A	...	8.38 / .330	8.03 / .316	8.13 / .320
B	5.33 / .210	5.84 / .230	4.75 / .187	5.26 / .207
C	...	2.00 / .079	...	2.00 / .079
D	16.00 / .630	...	...	15.93 / .627
E	1.00 / .039	1.05 / .041	5.33 / .210	...
F	...	...	9.04 / .356	9.19 / .362
G	...	...	6.76 / .266	...
H	...	...	10.72 / .422	...

## Technical Data

ELECTRICAL DATA	REQUIREMENTS
Impedance	75 $\Omega$
Frequency range	DC ... 1.5 GHz
RF-leakage (measured at 1 GHz)	$\geq 90$ dB
Dielectric withstanding voltage (at sea level)	2.5 kV rms, 50 Hz
Working voltage (at sea level)	$\leq 1.0$ kV rms, 50 Hz
Insulation resistance	$\geq 5 \cdot 10^3$ M $\Omega$
Contact resistance - centre contact - outer contact	$\leq 1.0$ m $\Omega$ $\leq 1.0$ m $\Omega$

MECHANICAL DATA	REQUIREMENTS
Coupling nut torque - recommended - proof torque	0.68 Nm ... 1.13 Nm / 6.0 ... 10.0 in. lbs 1.70 Nm / 15.0 in. lbs
Coupling nut retention force	$\geq 450$ N / 101.2 lbs
Contact captivation	$\geq 28$ N / 6.3 lbs
Cable retention force	on request
Durability (matings)	$\geq 500$

ENVIRONMENTAL DATA	TEST CONDITIONS
Temperature range	- 65°C ... + 165°C / - 85°F ... + 329°F
Climatic category	IEC $\rightarrow$ 55 / 155 / 21
Thermal shock	MIL-STD-202, Method 107, Condition B
Moisture resistance	MIL-STD-202, Method 106
Corrosion	Saltspray test acc. to MIL-STD-202, Method 101, Condition B
Vibration	MIL-STD-202, Method 204, Condition B
Shock	MIL-STD-202, Method 213, Condition I

MATERIAL DATA			
CONNECTOR PART	STANDARDS	MATERIAL	PLATING
Bodies Pin contact	QQ-B-626	brass	SUCOPLATE® gold
Outer contact, slotted		spring bronze	SUCOPLATE®
Female contacts	QQ-C-530	beryllium-copper, hardened	gold
Crimp ferrules	SUHNER® specification	copper	SUCOPLATE®
Insulators, standard version		PTFE or PFA	
Gaskets		silicone rubber	

Some connectors may have a specification that differs from the above mentioned data.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [huber & suhner](#) manufacturer:*

Other Similar products are found below :

[31 MMBX-SMA-50-1/111\\_NE](#) [74Z-0-23-17](#) [32 MMBX-50-0-6 / 111\\_NE](#) [TL8A-11SMA-11SMA-03000-51](#) [TL8A-11SMA-11SMA-01500-51](#)  
[23\\_SMA-50-0-1/111\\_NE](#) [TL-8A-11N-11SMA-01500-51](#) [7404.17.0003](#) [24\\_BNT-50-2-1/103\\_NE](#) [5906.17.0005](#) [53\\_SMA-50-0-2/111\\_NE](#)  
[Microbend R-13](#) [5910\\_SMA-50-005/19-\\_NE](#) [16\\_SMA-50-2-55/199\\_NE](#) [16\\_SMA-50-2-43/133\\_NE](#) [11\\_716-50-7-31/033\\_-Y](#) [Minibend L-13](#)  
[6550.17.AA](#) [Microbend R-4.5](#) [74\\_Z-0-0-53](#) [6603\\_SMA-50-2/199\\_NE](#) [85\\_SMC-50-0-1/133\\_NE](#) [MF53/1x8A\\_21MXP/11SK/305](#)  
[1324.17.0114](#) [75\\_Z-0-0-51](#) [31\\_PC24-SK-50-1/199\\_NE](#) [65\\_BNC-50-0-2/133\\_NE](#) [76\\_Z-0-10-14](#) [11\\_N-50-4-19/12-\\_NE](#) [80346275](#) [23\\_SHV-](#)  
[50-0-2/133\\_NE](#) [33\\_SMA-QMA-50-1/133\\_NE](#) [11\\_C-50-7-6/133\\_NE](#) [6806.19.A](#) [33\\_716-N-50-51/-33\\_NE](#) [5930\\_N-50-050/19-\\_NE](#) [16\\_BNC-](#)  
[50-7-6/133\\_NE](#) [Mini141 K-8](#) [33\\_BNC-N-50-1/133\\_NE](#) [6701.01.B](#) [33\\_BNC-QLA-01-1/1--\\_NE](#) [25\\_N-50-7-8/133\\_NE](#) [22\\_BNC-50-0-](#)  
[5/133\\_NE](#) [6500\\_N-50-1/199\\_NE](#) [3401.17.0033](#) [6601\\_SMA-50-1/199\\_NE](#) [74\\_Z-0-0-56](#) [3401.00.0022](#) [MF53/1x8A\\_21MXP/21SK\\_erg/305](#)  
[3402.17.K](#)