

# Cree® 5-mm Round LED

## Model # LC503UHR1-15P-A

### Data Sheet

15-degree, 5-mm round LED lamp in red color with water-transparent lens and stopper

#### Applications

- Advertising Signs
- Indicators
- Traffic Lights
- Automotive Lighting

#### Absolute Maximum Ratings ( $T_A = 25^\circ\text{C}$ )

| Items  | Symbol    | Absolute Maximum Rating  | Unit |
|--|-----------|--|------|
| Forward Current                                      | $I_F$     | 50   | mA   |
| Peak Forward Current <sup>Note</sup>                 | $I_{FP}$  | 200  | mA   |
| Reverse Voltage                                      | $V_R$     | 5  | V    |
| Power Dissipation                                    | $P_D$     | 130  | mW   |
| Operation Temperature                                | $T_{opr}$ | -40 ~ +95  | °C   |
| Storage Temperature                                  | $T_{stg}$ | -40 ~ +100   | °C   |
| Lead Soldering Temperature                           | $T_{sol}$ | Max. 260°C for 3 sec. max.<br>(3 mm from the base of the epoxy bulb) |      |
| Electrostatic Discharge Classification(MIL-STD-883E) | ESD       | Class 2  |      |

**Note:** Pulse width  $\leq 0.1$  msec, duty  $\leq 1/10$ .

#### Typical Electrical & Optical Characteristics ( $T_A = 25^\circ\text{C}$ )


| Characteristics     | Symbol             | Condition              | Unit          | Minimum | Typical | Maximum |
|---------------------|--------------------|------------------------|---------------|---------|---------|---------|
| Forward Voltage     | $V_F$              | $I_F = 20 \mu\text{A}$ | V             |         | 2.1     | 2.6     |
| Reverse Current     | $I_R$              | $V_R = 5 \text{ V}$    | $\mu\text{A}$ |         |         | 100     |
| Dominant Wavelength | $\lambda_D$        | $I_F = 20 \text{ mA}$  | nm            | 618     | 624     | 630     |
| Luminous Intensity  | $I_V$              | $I_F = 20 \text{ mA}$  | mcd           | 5860    | 12000   |         |
| 50% Power Angle     | $2\theta_{1/2H-H}$ | $I_F = 20 \text{ mA}$  | deg           |         | 15      |         |

**Standard Bins for LC503UHR1-15P-A ( $I_f = 20 \text{ mA}$ )**

Lamps are sorted to luminous intensity ( $I_v$ ) and dominant wavelength ( $\lambda_D$ ) bins shown.

Orders for LC503UHR1-15P-A may be filled with any or all bins contained as below.

All luminous intensity ( $I_v$ ) and dominant wavelength ( $\lambda_D$ ) values shown and specified are at  $I_f = 20 \text{ mA}$ .

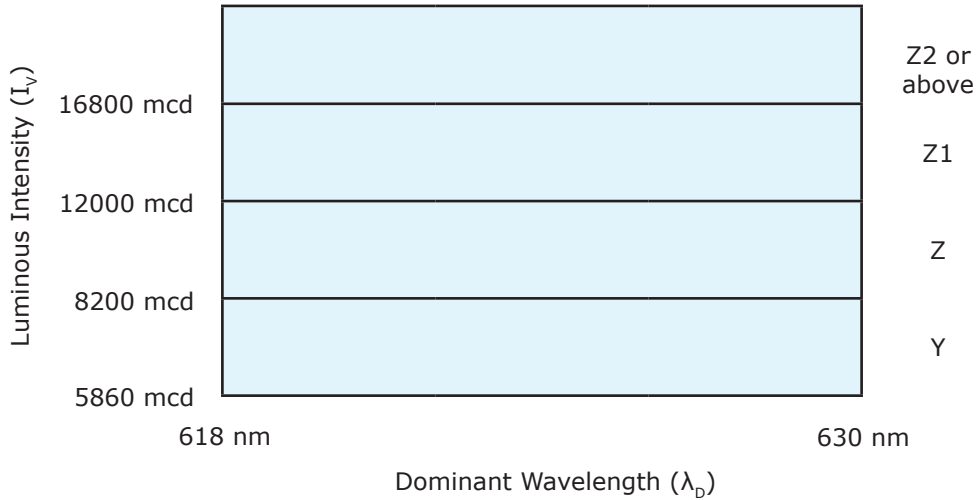

**Important Notes:**

1. All ranks will be included per delivery; rank ratio will be based on the dice distribution.
2. Pb content <1000 ppm.
3. Tolerance of measurement of luminous intensity is  $\pm 15\%$ .
4. Tolerance of measurement of dominant wavelength is  $\pm 1 \text{ nm}$ .
5. Tolerance of measurement of  $V_f$  is  $\pm 0.05 \text{ V}$ .
6. Packaging methods are available for selection; please refer to the "Cree LED Lamp Packaging Standard" document.
7. Please refer to the "Cree LED Lamp Reliability Test Standards" document for reliability test conditions.
8. Please refer to the "Cree LED Lamp Soldering & Handling" document for information about how to use this LED product safely.

**Graphs**

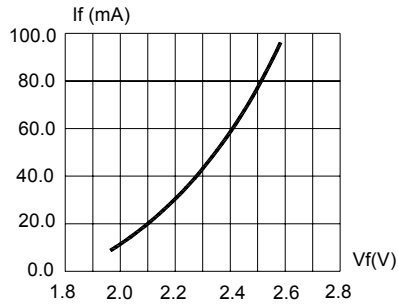


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

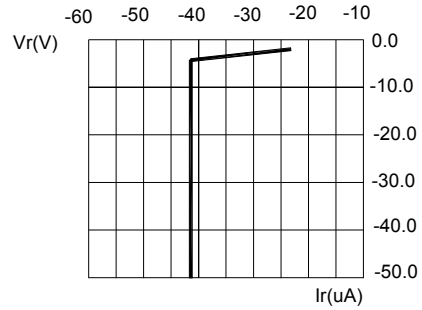


FIG.2 REVERSE CURRENT VS. REVERSE VOLTAGE.

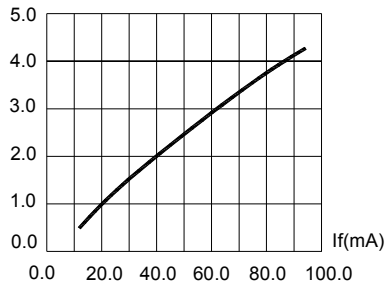


FIG.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT.

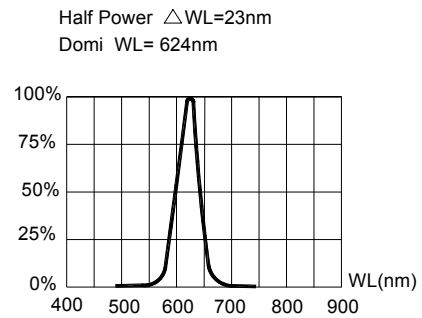


FIG.4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.

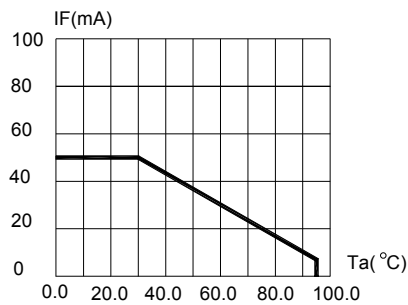


FIG.5 MAXIMUM FORWARD DC CURRENT VS AMBIENT TEMPERATURE ( $T_{jmax} = 105^{\circ}C$ )

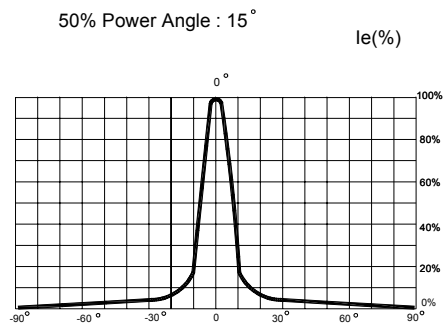



FIG.6 FAR FIELD PATTERN

## Mechanical Dimensions

All dimensions are in mm. Tolerance is  $\pm 0.25$  mm unless otherwise noted.

An epoxy meniscus may extend about 1.5 mm down the leads.

Burr around bottom of epoxy may be 0.5 mm max.

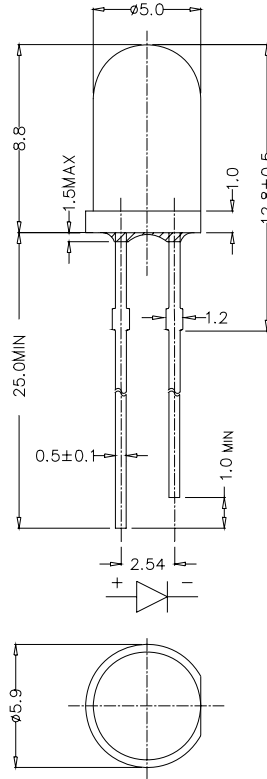

## Notes

### RoHS Compliance

The levels of environmentally sensitive, persistent biologically toxic (PBT), persistent organic pollutants (POP), or otherwise restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2002/95/EC on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS), as amended through April 21, 2006.


### Vision Advisory Claim

Users should be cautioned not to stare at the light of this LED product. The bright light can damage the eye.

## Kit Number System

Cree LED lamps are tested and sorted into performance bins. A bin is specified by ranges of color, forward voltage, and brightness. Sorted LEDs are packaged for shipping in various convenient options. Please refer to the "Cree LED Lamp Packaging Standard" document for more information about shipping and packaging options.

Cree LEDs are sold by order codes in combinations of bins called kits. Order codes are configured in the following manner:

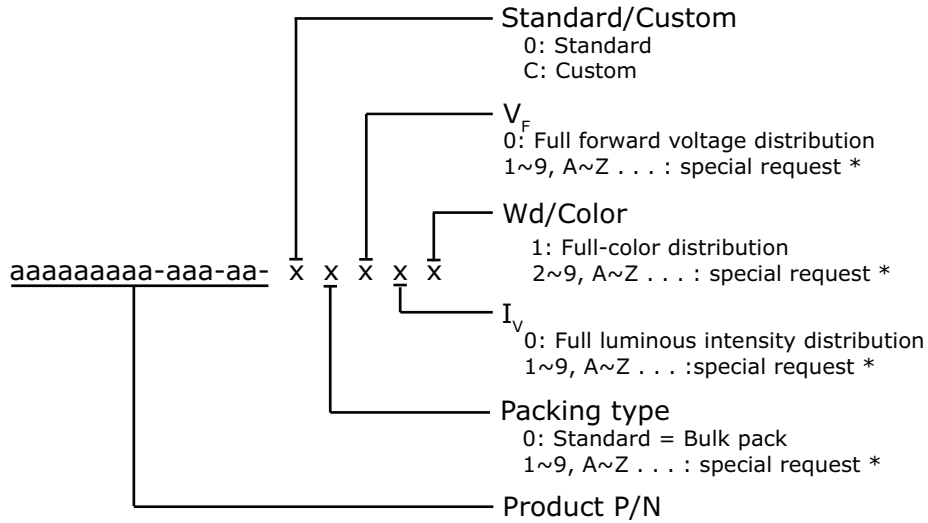

\* Contact your Cree sales representative for ordering information.

## Standard Available Kits\*

| Kit Number            | Description                                 |
|-----------------------|---|
| LC503UHR1-15P-A-00001 | 5mm Round 15 Red, Full Rank, Bulk Pack      |
| LC503UHR1-15P-A-00002 | 5mm Round 15 Red, IV Rank: Z, Z1, Bulk Pack |

\* Please contact your Cree representative about the availability of non-standard kits.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Standard LEDs - Through Hole category:](#)*

*Click to view products by [Cree manufacturer:](#)*

Other Similar products are found below :

[LTL-10254W](#) [LTL-1214A](#) [LTL-1BEDJ](#) [LTL-2231AT](#) [LTL-3251A](#) [LTL-4262N](#) [LTL-5234](#) [LTL87HTBK](#) [LTL-87HD4B](#) [7383/V7C3-BSTA-L/PR3/MS](#) [HLMP-AG64-X10ZZ](#) [HLMP-EG1A-Z10DV](#) [HLMP-EL3B-WXKDD](#) [HLMP-HB74-UVBDD](#) [HLMP-HG65-VY0DD](#) [HLMP-HM74-34CDD](#) [HLMP-HM75-34CDD](#) [1L0532V23G0TD001](#) [NSPW500CS](#) [C4SMA-BGF-CQ34Q3C2](#) [L53GC13](#) [264-7SURTS530-A3](#) [L-C150JRCT](#) [S4SMS-BJF-CQ42QGF2](#) [S4SMS-GJF-CW12QMF2](#) [LD CQDP-1U3U-W5-1-K](#) [LO566UHR3-70G-A3](#) [SLA560WBD2PT3](#) [LP379PPG1C0G0300001](#) [SLR-322MCT32](#) [SLR-342DUT32](#) [SLR-342MC3F](#) [SLR343BC7TT32](#) [SLR343BCTT32](#) [SLX-LX3044GD](#) [SLX-LX3044ID](#) [SLX-LX3044YD](#) [1.90690.3330000](#) [SSL-LX20483ID](#) [SSL-LX3034YD](#) [SSL-LX5093LGT-11](#) [SSL-LX5093PGC](#) [SSL-LX5093SRC/F](#) [SSL-LX5093SYT](#) [SSL-LX509E3SIT](#) [SSL-LX509FT3ID](#) [SSL-LX50FT3GD](#) [SSS-LX4673ID-410B](#) [1L0532Y24I0TD001](#) [264-7SYGD/S530-E2](#)