

SPECIFICATIONS

Current Rating: 3A AC,DC


Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max Insulation Resistance: $1000M\Omega$ Min Withstanding Voltage: 1000V AC/minute

Pin Material: Brass/Tin-plated Material: Nylon 66,UL94V-0

Color: Natural(White)

Ordering Information & Dimensions

ordering information & birtensions		
PART NO.	Dimensions	
	Α	В
A2501WR-02P	2.50	7.50
A2501WR-03P	5.00	10.00
A2501WR-04P	7.50	12.50
A2501WR-05P	10.00	15.00
A2501WR-06P	12.50	17.50
A2501WR-07P	15.00	20.00
A2501WR-08P	17.50	22.50
A2501WR-09P	20.00	25.00
A2501WR-10P	22.50	27.50
A2501WR-11P	25.00	30.00
A2501WR-12P	27.50	32.50
A2501WR-13P	30.00	35.00
A2501WR-14P	32.50	37.50
A2501WR-15P	35.00	40.00
A2501WR-16P	37.50	42.50
A2501WR-17P	40.00	45.00
A2501WR-18P	42.50	47.50
A2501WR-19P	45.00	50.00
A2501WR-20P	47.50	52.50

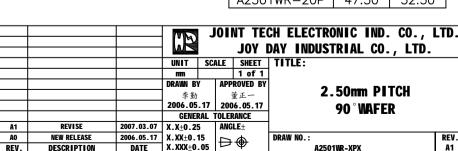

<u>1</u>-Type 1 <u>2</u>-Type 2

TYPE 2

JOY DAY INDUSTRIAL CO., LTD.

2.50mm PITCH 90°WAFER

DRAW NO.:

A2501WR-XPX

REV. A1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for I/O Connectors category:

Click to view products by Joint manufacturer:

Other Similar products are found below:

571763P 58098-0628 61-168618-12P D38999/20FJ29SB L/C 72.250.1628.2 72.250.2428.2 74720-0505 747680210 76.350.0729.0 768711403 FCN-244F080-G/1 FCN-260A9920 FCN-268D024-G/2F#10X-R10 MP-5T180MUNNA-005 MP-5XRJ45UNNB-003 PCS-E50FA
PCS-XE26LKA PCS-XE26MA+ PCS-XES68MS+ G38A71314B 91-569719-35R 9776-18-6 DX40-50P(55) 1571250010 157-22500-3
MS3471L14-19P L/C 171224-6031 1888020-8 91-569786-35H 91-569786-35M 91-644626-35P 172501-4002 172501-6002 FCN-260C008A/L0 FCN-260C024-AL0 FCN-261Z008 FCN-268D008-G/1K 2000314-1 200331-1 2007498-2 PCR-E28LMDAG1+ PCR-E36FC+ PCSE28FS+ PCS-XE26SLFD+ PCS-XE26SLFDT+ G38A71214B HDRA-E68W1LFDTC-SL+ HDR-E14MSG1+ R88A-CNK81S CRT1ATT02