

Description .....	3
Toggle and Pushbutton Switch .....	4
Accessories.....	7
Technical Data.....	9
Drawings.....	10
Index.....	14

## Product Information

### General notes

Recommended for outdoor applications for military and avionics equipment, telecommunications, medical equipment, power supplies. The professional toggle and pushbutton switches are in one or two pole version available. The switches are IP 67 front sealed or IP 65 with fitted silicone cap.

Toggle and pushbuttons switches of the DJET series are available in two sizes and fit in front panel mounting hole 10 mm dia. or 6.35 mm dia.

### Mounting

The switches are mounted by pushing them through the mounting hole in the front panel. They are fixed with a fixing nut.

*We reserve the right to modify technical data  
All dimensions in mm*

## Toggle Switch 6.35 mm dia.



	Front protection		Contacts	Contact material	Switching action	Terminals	Typ-Nr.	Mounting dimensions	Technical drawing	Circuit drawing	E-3
	-	Front ring									
<b>Toggle Switch 6.35 mm dia.</b>	-	Metal chrome	1 C	Au	MA-MA	S	<b>11.17352.21</b>	1	13	2	0.005
				Ag	MA-MA	S	<b>01.17301.21</b>	1	13	2	0.005
				2 C	Ag	MA-MA	S	<b>02.17312.21</b>	1	12	1

Front protection: - = without

Contacts: C = Changeover

Contact material: Au = Gold, Ag = Silver

Switching action: MA = Maintained action

Terminals: S = Soldering terminal

Mounting dimensions from page 10, Technical drawing from page 10, Circuit drawing from page 13

## Toggle Switch 10 mm dia.



	Front protection		Terminals	Switching action	Contact material	Contacts	Typ-Nr.	Mounting dimensions	Technical drawing	Circuit drawing	E-3				
	-	Front ring													
<b>Toggle Switch 10 mm dia.</b>	IP 67	Metal mat-black	S	MA-MA	Au	1 C	<b>11.17201.30</b>	2	14	2	0.011				
						Metal mat-chrome	S	MA-MA	Au	1 C	<b>11.17201.22</b>	2	14	2	0.011
										Ag	1 C	<b>11.17271.22</b>	2	14	2
	keine	Metal chrome	S	MA-MA	Au	1 C	<b>11.17051.21</b>	2	15	2	0.010				
						2 C	<b>12.17063.21</b>	2	16	1	0.020				
						Ag	1 C	<b>01.17001.21</b>	2	15	2	0.010			
							2 C	<b>02.17013.21</b>	2	16	1	0.020			

Front protection:

Terminals: S = Soldering terminal

Switching action: MA = Maintained action

Contact material: Au = Gold, Ag = Silver


Contacts: C = Changeover


Mounting dimensions from page 10, Technical drawing from page 10, Circuit drawing from page 13

## Pushbutton 6.35 mm dia.



### Essential Accessories:

 Cap for pushbutton 6.35 mm page 7

	Front protection	Front ring	Terminals	Switching action	Contact material	Contacts	Typ-Nr.	Mounting dimensions	Technical drawing	Circuit drawing	
<b>Pushbutton 6.35 mm dia.</b>	-	Metal chrome	S	MA-M	Au	1 C	<b>17.17851.21</b>	1	6	2	0.007
					Ag	1 C	<b>17.17801.21</b>	1	6	2	0.007
		Metal mat-black	S	MA-M	Au	1 C	<b>17.17851.30</b>	1	6	2	0.007

Front protection: - = without

Terminals: S = Soldering terminal

Switching action: MA = Maintained action, M = Momentary action

Contact material: Au = Gold, Ag = Silver

Contacts: C = Changeover


Mounting dimensions from page 10, Technical drawing from page 10, Circuit drawing from page 13

## Pushbutton 10 mm dia.



### Essential Accessories:

 Cap for Pushbutton 10 mm dia. page 7

	Front protection	Front ring	Terminals	Switching action	Contact material	Contacts	Typ-Nr.	Mounting dimensions	Technical drawing	Circuit drawing	
<b>Pushbutton 10 mm dia.</b>	IP 67	Metal chrome	S	MA-M	Au	2 C	<b>18.17253.22</b>	2	10	1	0.020
					Ag	2 C	<b>18.17283.22</b>	2	10	1	0.020
		Metal mat-black	S	MA-M	Au	1 C	<b>17.17252.30</b>	2	7	2	0.010
					2 C	<b>18.17253.30</b>	2	10	1	0.020	
		Metal mat-chrome	S	MA-M	Au	1 C	<b>17.17252.22</b>	2	7	2	0.010
					Ag	1 C	<b>17.17282.22</b>	2	7	2	0.010
	-	Metal chrome	S	MA-M	Au	1 C	<b>17.17552.21</b>	2	8	2	0.010
					2 C	<b>18.17563.21</b>	2	11	1	0.020	
					Ag	2 C	<b>18.17513.21</b>	2	11	1	0.020
		Metal mat-black	S	MA-M	Au	1 C	<b>17.17551.30</b>	2	9	2	0.010
					2 C	<b>17.17552.30</b>	2	8	2	0.010	

Front protection: - = without

Terminals: S = Soldering terminal

Switching action: MA = Maintained action, M = Momentary action

Contact material: Au = Gold, Ag = Silver

Contacts: C = Changeover

Mounting dimensions from page 10, Technical drawing from page 10, Circuit drawing from page 13

## Front

### Cap for pushbutton 6.35 mm

	Cap	Typ-Nr.	Technical drawing	
<b>Cap for pushbutton 6.35 mm</b>	Plastic black	<b>20.17804.01</b>	4	0.001
	Plastic green	<b>20.17804.03</b>	4	0.001
	Plastic red	<b>20.17804.02</b>	4	0.001

Technical drawing from page 10



### Paddel for Toggle Switch 6.35 mm dia.

	Paddle	Typ-Nr.	Technical drawing	
<b>Paddel for Toggle Switch 6.35 mm dia.</b>	Plastic black	<b>20.17354.01</b>	5	0.001

Technical drawing from page 10



### Cap for Pushbutton 10 mm dia.

	Cap	Typ-Nr.	Technical drawing		
<b>Cap for Pushbutton 10 mm dia.</b> 13 mm dia.	Plastic black	<b>20.17254.01</b>	1	0.001	
	9 mm dia.	Plastic black	<b>20.17504.01</b>	4	0.001
		Plastic red	<b>20.17504.02</b>	4	0.001

Technical drawing from page 10




### Protective cap for pushbutton 10 mm dia.

	Front ring	Typ-Nr.	Technical drawing	
<b>Protective cap for pushbutton 10 mm dia.</b> with black silicone cap	Metal chrome	<b>20.17292.21</b>	2	0.004

Technical drawing from page 10



**Protective cap for toggle switch 10 mm dia.**

	Front ring	Typ-Nr.	Technical drawing	
<b>Protective cap for toggle switch 10 mm dia.</b> with black silicone cap	Metal chrome	<b>20.17291.21</b>	3	0.004 



Technical drawing from page 10



## Toggle and Pushbutton Switch

### Switching system

Positive snap-action

### Material

#### Material of contact

Gold contacts: Gold/gold plated brass contacts

Silver contacts: Solid silver/silver-plated contacts

### Shock resistance

100 g, as per IEC 60512-4

### Resistance to vibrations

10 g, 10 ... 2000 Hz, 10 cycles, as per IEC 60512-4

### Damp heat

56 days (Gold contact versions only)

### Approvals

RoHS compliant

## Mechanical characteristics

#### Front panel thickness

Min. 1.2 mm

#### Terminals

Gold contacts: Gold plated brass

Silver contacts: Silver plated brass

#### Tightening torque

Rear nut 125 Ncm

Do not tighten by means of top nut!

## Electrical characteristics

#### Operating voltage/-current

10 V, 50 mA minimum (silver contacts)

10 mV, 100  $\mu$ A (gold contacts)

#### Isolation resistance

>100 000 M $\Omega$  at 500 VDC

#### Contact resistance

<10 m $\Omega$

#### Electrical life

100 000 operations

#### Switch rating

Resistive circuit

Voltage	220 VAC	110 VAC	48 VDC	24 VDC	12 VDC
Current	1.5 A	2.5 A	1 A	2.25 A	4.5 A

Inductive circuit

50 % of above values

#### Electric strength

1000 V<sub>rms</sub>, 50 Hz between terminals on the same pole

2000 V<sub>rms</sub>, 50 Hz between all terminals connected together and ground

2000 V<sub>rms</sub>, 50 Hz between terminals of adjacent poles

## Environmental conditions

#### Storage temperature

-40 °C ... +85 °C

#### Operating temperature

-40 °C ... +85 °C

#### Protection degree


IP 67 (sealed 10 mm dia. version only)

IP 65 with protective cap

## Mounting dimensions


1 Toggle Switch 6.35 mm dia. page 4 | Pushbutton 6.35 mm dia. page 5

FRONT PANEL  
MOUNTING HOLE:




2 Toggle Switch 10 mm dia. page 4 | Pushbutton 10 mm dia. page 6

FRONT PANEL  
MOUNTING HOLE:




## Technical drawing


1 Cap for Pushbutton 10 mm dia. page 7




2 Protective cap for pushbutton 10 mm dia. page 7




3 Protective cap for toggle switch 10 mm dia. page 8




4 Cap for pushbutton 6.35 mm page 7 | Cap for Pushbutton 10 mm dia. page 7




5 Paddel for Toggle Switch 6.35 mm dia. page 7




6 Pushbutton 6.35 mm dia. page 5

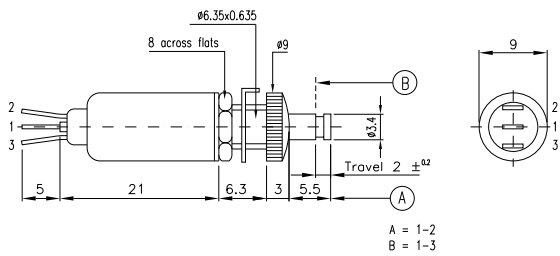


7 Pushbutton 10 mm dia. page 6

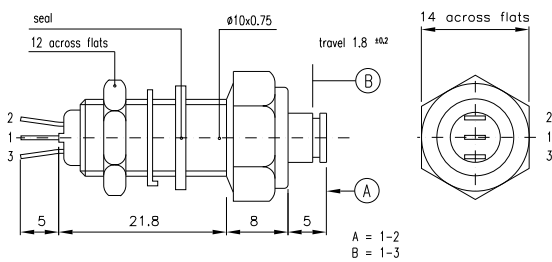


8 Pushbutton 10 mm dia. page 6

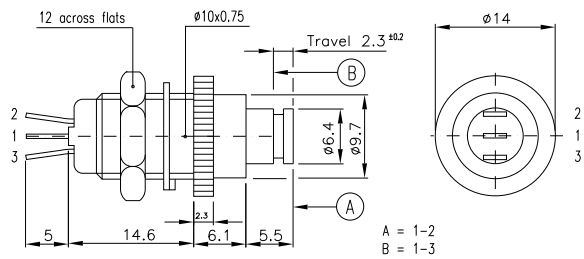


9 Pushbutton 10 mm dia. page 6

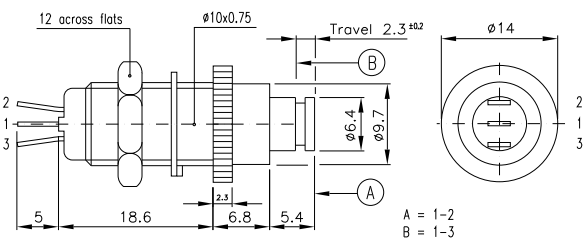


10 Pushbutton 10 mm dia. page 6

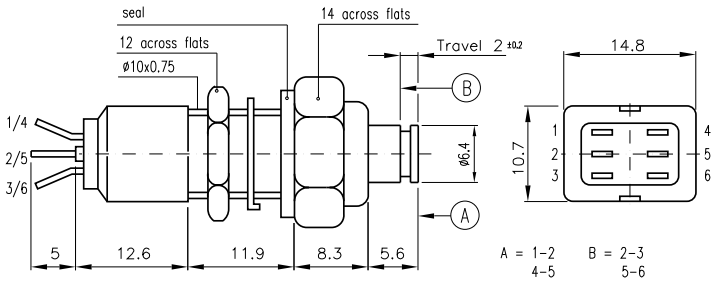


11 Pushbutton 10 mm dia. page 6

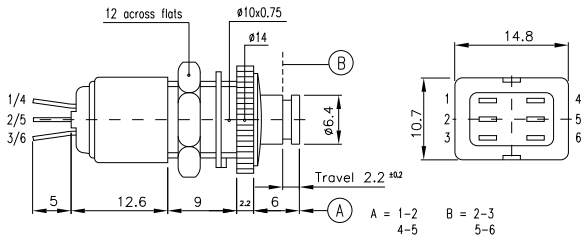


12 Toggle Switch 6.35 mm dia. page 4

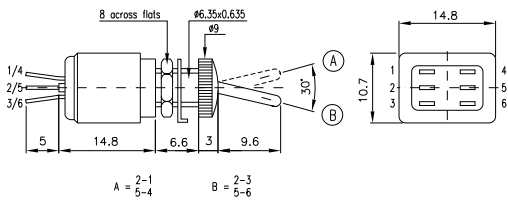


13 Toggle Switch 6.35 mm dia. page 4

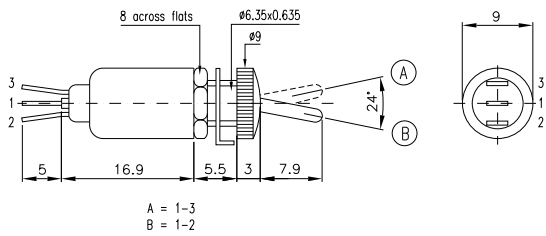


14 Toggle Switch 10 mm dia. page 4

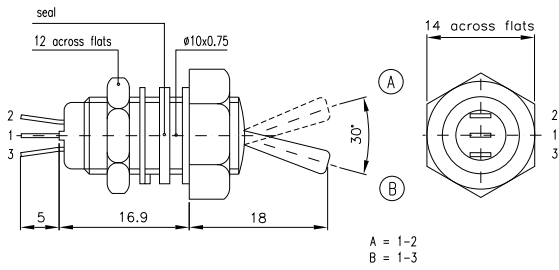

15 Toggle Switch 10 mm dia. page 4

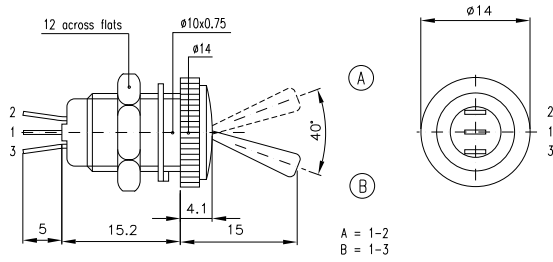


16 Toggle Switch 10 mm dia. page 4

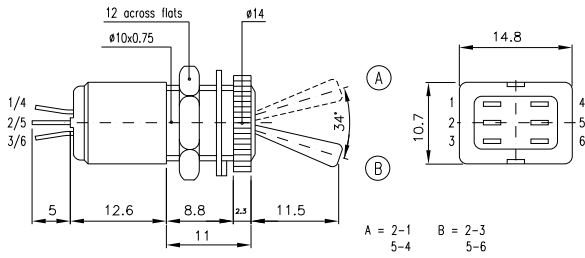


## Circuit drawing

1 Toggle Switch 6.35 mm dia. page 4 | Toggle Switch 10 mm dia. page 4 | Pushbutton 10 mm dia. page 6



2 Toggle Switch 6.35 mm dia. page 4 | Toggle Switch 10 mm dia. page 4 | Pushbutton 6.35 mm dia. page 5 | Pushbutton 10 mm dia. page 6



# Index from Typ-Nr.

Typ-Nr.	Page	Typ-Nr.	Page	Typ-Nr.	Page
01.17001.21	4				
01.17301.21	4				
02.17013.21	4				
02.17312.21	4				
11.17051.21	4				
11.17201.22	4				
11.17201.30	4				
11.17271.22	4				
11.17352.21	4				
12.17063.21	4				
12.17273.22	4				
17.17252.22	6				
17.17252.30	6				
17.17282.22	6				
17.17551.30	6				
17.17552.21	6				
17.17552.30	6				
17.17801.21	5				
17.17851.21	5				
17.17851.30	5				
18.17253.22	6				
18.17253.30	6				
18.17283.22	6				
18.17513.21	6				
18.17563.21	6				
20.17254.01	7				
20.17291.21	8				
20.17292.21	7				
20.17354.01	7				
20.17504.01	7				
20.17504.02	7				
20.17804.01	7				
20.17804.02	7				
20.17804.03	7				

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Toggle Switches](#) category:*

*Click to view products by [Secme](#) manufacturer:*

Other Similar products are found below :

[8A1-C-222](#) [60012L](#) [6006L](#) [6663](#) [7101MD9V30GE](#) [7101SPDV30BE](#) [7103SDV30BE](#) [7105D](#) [7108P3YAV2BE](#) [71YY50282](#)  
[7201MD9AVBE](#) [7301K38](#) [7306K36](#) [7310K36](#) [7314K36](#) [7506K4](#) [7592K6](#) [7691K14](#) [7700K1](#) [8396K108](#) [8824K14](#) [8828K13](#) [G2VX](#) [G3VX](#)  
[PS83-121G](#) [A101MD9AB04](#) [A101SD9AB04](#) [A101SDCQ04](#) [A103SD9AQ04](#) [A107TZB04](#) [A123P32YZQ](#) [A123S1YZG](#) [A127S1YCQ](#) [1-](#)  
[1825192-0](#) [A131S1YZQ](#) [A201SCWZB04](#) [A207SYCB04](#) [A208J61ZQ0004](#) [A221K12KAG](#) [A221S1YZQ](#) [A221T1TCQ](#) [A232K12KZQ](#)  
[A232M1YCQ](#) [A323S1CWZQ](#) [A423S1CWZG-M8](#) [A423S1YZQ](#) [12149A-3V](#) [12156AX408](#) [12147AGKX679](#) [12149AD2G0383VX408](#)