

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [39-00-0185](#)
Status: **Active**
Overview: [Mini-Fit Jr.™ Power Connectors](#)
Description: Mini-Fit® Female Crimp Terminal, Selective Gold (Au) over Phosphor Bronze, 16 AWG, Reel

Documents:

Drawing (PDF)	Packaging Specification PK-5556-001 (PDF)
Product Specification PS-5556-001 (PDF)	Test Summary TS-5556-002 (PDF)
Product Specification PS-5556-002 (PDF)	RoHS Certificate of Compliance (PDF)

General

Product Family	Crimp Terminals
Series	5556
Application	Power
Crimp Quality Equipment	Yes
Overview	Mini-Fit Jr.™ Power Connectors
Packaging Alternative	39-00-0186 (Loose)
Product Name	Mini-Fit®
UPC	800754395939

Physical

Durability (mating cycles max)	30
Gender	Female
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Net Weight	0.130/g
Packaging Type	Reel
Plating min - Mating	0.762µm
Plating min - Termination	0.762µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.80-3.10mm
Wire Size AWG	16
Wire Size mm²	N/A

Electrical


Current - Maximum per Contact	9.0A
Voltage - Maximum	600V

Material Info

Old Part Number	5556-PBGS3P
-----------------	-------------

Reference - Drawing Numbers

Packaging Specification	PK-5556-001
Product Specification	PS-5556-001, PS-5556-002
Sales Drawing	SD-5556-006
Test Summary	TS-5556-002

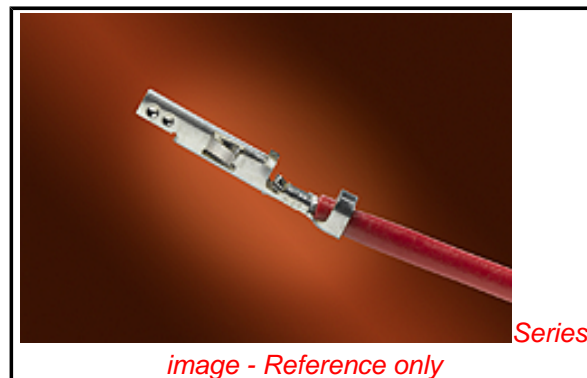

EU RoHS

ELV and RoHS Compliant

REACH SVHC

Contains SVHC: No Low-Halogen Status Low-Halogen

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

[5556Series](#)

Mates With

[5558](#) Mini-Fit® Crimp Male Terminals. Mini-Fit Jr.™ Header, Dual Row, [5566](#) , [5569](#)

Use With

[5557](#) Mini-Fit Jr.™ Receptacle Housing, [30067](#) Mini-Fit® TPA, [42474](#) Mini-Fit® BMI Panel Mount, [44516](#) Mini-Fit® BMI Slide and Lock Panel Mount

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Hand Crimp Tool for Male and Female Crimp Terminals, 16-24 AWG Wire	0638190900

FineAdjust™ Applicator for Insulation OD 2.60-3.15mm Optimized for 16 AWG Only	<u>0639002800</u>
FineAdjust™ Applicator for Insulation OD 2.20-2.45mm Optimized for 16 AWG Only	<u>0639003000</u>
T2 Terminator™ for insulation OD 2.20-2.45mm optimized for 16 AWG only	<u>0639103000</u>
FineAdjust™ Applicator for Insulation OD 1.80-2.20mm Optimized for 16 AWG Only	<u>0639015300</u>
Extraction Tool	<u>0011030044</u>
T2 Terminator™ for insulation OD 2.60-3.15mm optimized for 16 AWG only	<u>0639102800</u>

Japan

Description	Product #
Applicator for M21 1A Bench Press, 18-24 AWG Wire	<u>0570223000</u>
Side-Feed Applicator For Full-Auto Machine	<u>0570223200</u>

This document was generated on 05/14/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [molex](#) manufacturer:

Other Similar products are found below :

[1201140065](#) [90814-0008](#) [38210-0105](#) [60506-C-50](#) [69008-0971](#) [73108](#) [79516-1043](#) [72903](#) [1062837003](#) [68301-1017](#) [03-12-1016](#) [71506-C](#)
[90835-0003](#) [02-09-8104](#) [880504](#) [67490-3220](#) [53254-0710](#) [85071-0017](#) [70984-4008](#) [387204903](#) [03-12-2022](#) [783472003](#) [89674-0805](#)
[514412093](#) [0191310031](#) [503308-4410](#) [02-09-6102](#) [0008650814](#) [0039000218](#) [89762-1403](#) [89762-1542](#) [89762-1582](#) [0011404526](#) [00136](#)
[0022173102](#) [0026615060](#) [CR4006A30M003](#) [0039532085](#) [58098-0628](#) [0003092041](#) [0008520123](#) [0011030025](#) [0011184017](#) [0022162060](#)
[0022552102](#) [01312](#) [M15730061](#) [61432](#) [6150300002](#) [CS63W64](#)