



“Coined” edges prevent cable damage





- Heyco’s SunRunner and SunRunner EZ’s robust “double-compression” design securely holds from (1) 12 gauge USE-2 to (2) 10 gauge PV-1000V solar wires.
- Also for use with other cables from .20” (5,1 mm) to .30” (7,6 mm) in diameter.
- Heyco SunRunner Clips are designed to provide a better method for PV module wire management **and may be used wherever single or multiple cable management is needed.**
- Smooth clip edges prevent damage to cable insulation.
- Locking tabs securely fasten clips to module extrusions, **or other panels.**
- Generous lead in for installation without tools.
- Screwdriver slot for easy removal or movement of clips if necessary.
- Neatly dresses cables on PV panel frames or along mounting channels.
- Constructed from corrosion resistant 304 stainless steel, not for use in a marine salt water environment.
- 316 stainless steel now available for marine and other harsh environments.
- **SunRunner EZ’s are designed for thicker module frames** as well as racking – accommodates profiles up to .250” (6,4 mm) thick!
- **SunRunner 4 designed to hold up to (4) 12 gauge USE-2 or (4) 10 gauge PV-1000V solar wires.**
- SunRunner 4 is constructed from heat treated 410 stainless steel for excellent strength and corrosion protection for outdoor exposure.
- DFARS Compliant.


HEYClip™ SunRunner® Cable Clips

Double-Compression, Straight-thru Design

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE	PART NO.		DESCRIPTION	FOOTPRINT		OVERALL HEIGHT	
Minimum in.	Maximum mm.	Minimum in.	Maximum mm.		304 Stainless	316 Stainless		A x B in.	mm.	C in.	mm.
1-2 Wires - SunRunner Clip for panels up to .090” (2,3 mm) thick											
.06	1,4	.09	2,3	.20” (5,1 mm)- .30” (7,6 mm) each cable	S6405	S6490	SunRunner® Clip 100 Pack	.97 x .50	24,6 x 12,7	.39	9,9
					S6445	S6495	SunRunner® Clip Bulk				
1-2 Wires - SunRunner EZ Clip for panels up to .250” (6,4 mm) thick											
.09	2,3	.25	6,4	.20” (5,1 mm)- .30” (7,6 mm) each cable	S6407	-	SunRunner® EZ Clip 100 Pack	.97 x .50	24,6 x 12,7	.41	10,4
					S6447	-	SunRunner® EZ Clip Bulk				
4 Wires - SunRunner 4 Clip for panels up to .125” (3,2 mm) thick											
.06	1,4	.13	3,2	.20” (5,1 mm)- .30” (7,6 mm) each cable	S6443	-	SunRunner® 4 Clip 100 Pack	1.34 x .50	33,8 x 12,7	.36	9,1
					S6483	-	SunRunner® 4 Clip Bulk				
4 Wires - SunRunner 4 EZ Clip for panels up to .250” (6,4 mm) thick											
.13	3,2	.25	6,4	.20” (5,1 mm)- .30” (7,6 mm) each cable	S6400	-	SunRunner® 4 EZ Clip 100 Pack	1.33 x .50	33,8 x 12,7	.36	9,1
					S6440	-	SunRunner® 4 EZ Clip Bulk				




SunRunner®

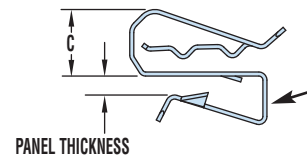


Wide, Flat Section for “EZ” Assembly


SunRunner® EZ



SunRunner® 4



SunRunner® 4 EZ

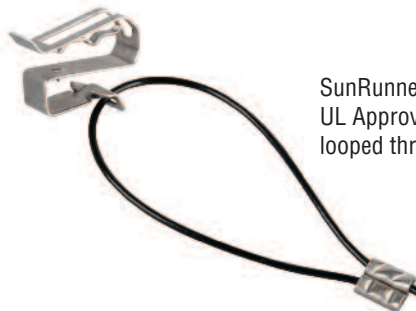

SunRunner® EZ with (optional) UL Approved SunBundler (page 1-11) looped through slot

Quick Specs

Material	.025” thick 304 or 316 stainless steel (SunRunner and SunRunner EZ) .020” thick 410 stainless steel (SunRunner 4 and SunRunner 4 EZ)
Certifications	Certified by UL for Compliance with both Canadian and US Requirements under File E54523
Temperature Range	-40°F (-40°C) to 572°F (300°C)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Cable Ties](#) category:

Click to view products by [3M](#) manufacturer:

Other Similar products are found below :

[20093-0](#) [SJ-3463](#) [SJ3518FR-1x50](#) [SJ3526N-Beige-2"x50yd](#) [SJ3526N BLACK 58" X 50YD](#) [SJ3571](#) [SJ-3571-1"x50yd-Black](#) [20113-0](#)
[T56137](#) [3-350087-0](#) [CTB75X75BKA-C](#) [3722](#) [561-B110120](#) [561-EZAB580T](#) [561-EZS375B40](#) [561-N3510](#) [561-TA250125](#) [08350-0](#) [08443-0](#)
[08600-0](#) [10035-0](#) [10036-0](#) [10037-0](#) [10325-0](#) [10362-0](#) [10606-0](#) [561-EZ250](#) [561-EZ500](#) [561-EZ625](#) [561-EZ750](#) [561-TA00600](#) [SJ3519FR](#)
[BLACK 1X50](#) [SJ3527N-Beige-2"x50yd](#) [SJ3527N-LOOP-BLACK-1](#) [SJ3572-2"x50yd-Black](#) [157-00039](#) [3719](#) [SJ-3401 BLACK 1"](#) [08445-0](#)
[08582-0](#) [08386-0](#) [10431-0](#) [08359-0](#) [10056-0](#) [10620-0](#) [10345-0](#) [10344-0](#) [08416-0](#) [08384-0](#) [08401-0](#)