

Multilayer High Frequency inductor

CIH10T Series (1608/ EIA 0603)




APPLICATION

Mobile communication systems, noise suppression at high frequency and Impedance matching.


FEATURES

- Lowest value of specific resistivity, good property of Q and high SRF.
- Possible to use at range above 100MHz
- Monolithic structure for high reliability.
- Do not contain lead and support lead-free soldering.
- RoHS compliant

RECOMMENDED LAND PATTERN

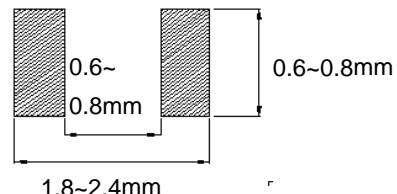

DIMENSION

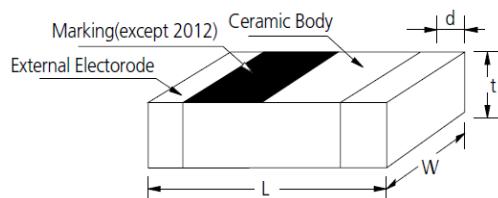

Type	Dimension [mm]			
	L	W	t	d
10	1.6±0.15	0.8±0.15	0.8±0.15	0.3±0.2

DESCRIPTION

Part No.	Inductance (nH) @100MHz	Q (typical.)		SRF (MHz) Min	DC resistance (Ω) Max.	Rated current (mA) Max.
		100MHz	800MHz			
CIH10T1N0 S	1.0±0.3nH	8	20	10000	0.05	800
CIH10T1N2 S	1.2±0.3nH	8	20	10000	0.05	800
CIH10T1N5 S	1.5±0.3nH	8	20	6000	0.1	800
CIH10T1N8 S	1.8±0.3nH	8	20	6000	0.1	800
CIH10T2N2 S	2.2±0.3nH	8	20	6000	0.1	800
CIH10T2N7 S	2.7±0.3nH	10	25	6000	0.1	800
CIH10T3N3 □	3.3±0.3nH,10%	10	25	6000	0.12	800
CIH10T3N9 □	3.9±0.3nH,10%	10	27	6000	0.14	800
CIH10T4N7 □	4.7±0.3nH,10%	10	27	4000	0.16	800
CIH10T5N6 □	5.6±0.3nH,10%	10	27	4000	0.18	800
CIH10T6N8 □	6.8±10%, 5%	10	27	4000	0.22	700
CIH10T8N2 □	8.2±10%, 5%	10	26	3500	0.24	700
CIH10T10N □	10.0±10%, 5%	12	26	3400	0.26	600
CIH10T12N □	12.0±10%, 5%	12	24	2600	0.28	600
CIH10T15N □	15.0±10%, 5%	12	24	2300	0.32	500
CIH10T18N □	18.0±10%, 5%	12	24	2000	0.35	500
CIH10T22N □	22.0±10%, 5%	12	25	1600	0.4	500
CIH10T27N □	27.0±10%, 5%	12	25	1400	0.45	500
CIH10T33N □	33.0±10%, 5%	12	24	1200	0.55	500
CIH10T39N □	39.0±10%, 5%	12	20	1100	0.6	400
CIH10T47N □	47.0±10%, 5%	12	20	900	0.77	400
CIH10T56N □	56.0±10%, 5%	12	20	900	0.75	400



ELECTRO-MECHANICS

Ver 201207

Part No.	Inductance (nH) @100MHz	Q (typical.)		SRF (MHz) Min	DC resistance (Ω) Max.	Rated current (mA) Max.
		100MHz	800MHz			
CIH10T68N □	68.0±10%, 5%	12	(¹)20	700	0.85	350
CIH10T82N □	82.0±10%, 5%	12	(¹)20	600	0.95	350
CIH10TR10 □	100.0±10%, 5%	12	(¹)20	600	1	350
CIH10TR12 □	120.0±10%, 5%	(²)8	-	500	1.2	300
CIH10TR15 □	150.0±10%, 5%	(²)8	-	500	1.2	250
CIH10TR18 □	180.0±10%, 5%	(²)8	-	400	1.3	250
CIH10TR22 □	220.0±10%, 5%	(²)8	-	400	1.5	200
CIH10TR27 □	270.0±10%, 5%	(²)8	-	400	1.5	200

(1) 500MHz, (2) 50MHz,

*Operating temperature range -55 to +125°C

※ Tolerance (B :±0.1nH, C :±0.2nH, S :±0.3nH, H :±3%, J :±5%, K :±10%)

※ Measurement equipment & Jig: HP4291B+16092A or Equivalent

※ The Rated Current is either the DC value at which the internal Ls value is decreased within 5% with the application of DC_Current, or the value of current at which the temperature of the element is increased within 20°C
(Reference ambient temperature:20°C)

PRODUCT IDENTIFICATION

CI	H	10	T	10N	J	N	C
(1)	(2)	(3)	(4)	(5)	(6)	(7)	(8)

(1) Chip Inductor

(2) H:High frequency type

(3) Dimension

(4) Material code(T:Dielectric material)

(5) Inductance(4N7:4.7nH, 10N:10nH, R10:100nH)


(6) Tolerance(C:±0.2nH, S:±0.3nH, J:±5%, K:±10%)

(7) Thickness option(N:Standard, A:Thinner than standard, B:Thicker than standard)


(8) Packaging(C:paper tape, E:embossed tape)

RECOMMENDED SOLDERING CONDITION

REFLOW SOLDERING

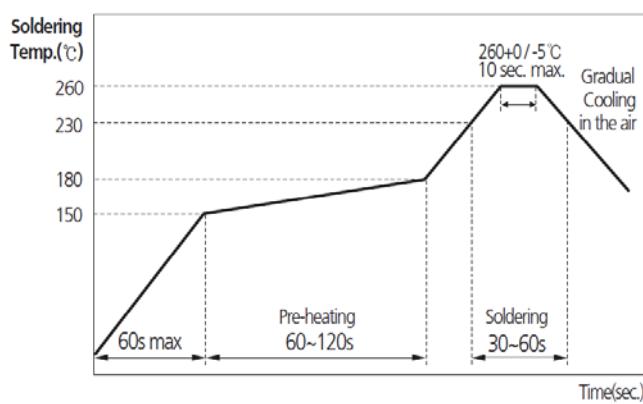

FLOW SOLDERING

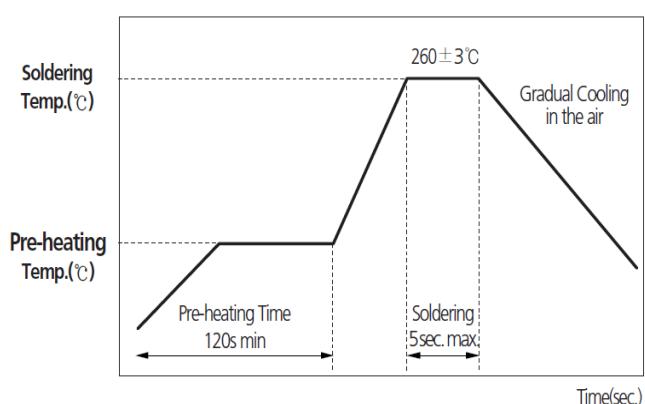

PACKAGING

Packaging Style	Quantity(pcs/reel)
Card Board Taping	4000

■ NOTICE :All specifications are subject to change without previous notice. Please contact with product representatives or engineers to check specifications.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [samsung](#) manufacturer:

Other Similar products are found below :

[DA61-04475B](#) [DA97-17194A](#) [KM44C4100BK-60](#) [CL05C160JB5NCNC](#) [CL21C151FBANNWC](#) [M471B5673EH1-CH900](#) [K4H510838B-TCB3](#) [RC1608F86R6CS](#) [CL31C120JBCNNNC](#) [CL21CR47BBANNNC](#) [CL10B104JO8NNNC](#) [CL32C103JBFNNNE](#) [CL31B223JBCNNNC](#) [CL21C221JDCNFNC](#) [CL21B223KBANNWC](#) [CL10B563KB8NFNC](#) [CL10B473KB8SFNC](#) [CL10B122KB8NFNC](#) [SI-B8T171550WW](#) [SL-B8V2N70LAWW](#) [BN96-35590A](#) [BN96-31876D](#) [DC97-15103A](#) [DA67-02638B](#) [BN96-32239D](#) [BN39-02189A](#) [BN39-02190A](#) [DA61-08574A](#) [DA97-17215A](#) [DC47-00027F](#) [AH59-02748B](#) [3903-001209](#) [CL03A224KA3NRNC](#) [RF062PJ150CS](#) [CL10A335MQ8NNNC](#) [CL10B823KA8NNNC](#) [CL10C680JB8NFNC](#) [CL31B681KHFNFNE](#) [CL31C101JCCNFNC](#) [RC1608F753CS](#) [RC1005FR100CS](#) [CL10F334ZO8NNNC](#) [CL31C331KBCNBNC](#) [CL31B683KBCNNNC](#) [CL21C2R4CBANNNC](#) [CL05B104MP5NNNC](#) [DC97-16350E](#) [AH81-09068A](#) [DC66-00814A](#) [DC61-03981A](#)