SERIES 1117 - SNAP-ACTION SWITCHES

TO 16 (6) A 400 V AC



PRODUCT FEATURES

- Double interrupting jump contact switching system
- Contact distance > 3 mm
- Material conformant with the filament wire test acc. to IEC 60 335-1:2001 chap. 30 and UL 94 V-0
- Large overtravel
- Actuator can be approached from all directions
- Normally open contact and normally closed contact versions

ON REQUEST

- Customized versions
- Changeover basic type 1116


	Mechanical life endurance		10E4
	Contact resistance (new condition)		< 100 mOhm (1 A 12 V DC)
	Insulation resistance (new condition)		> 100 MOhm (500 V DC)
	Proof tracking		250 PTI
	Protection type		IP 40
	Ambient temperature		-40 °C +85 °C
	Flammability		UL 94 V-0
	Glow wire test temperature		850 °C
	Material	actuator housing terminals	PA glass fiber-reinforced PA glass fiber-reinforced silver plated
	Contact material		Ag
	Contact distance		≥ 3 mm
	Approval marks		



Suitable for appliances of protection class II under compliance with the installation conditions required on the equipment side

SERIES 1117 - SNAP-ACTION SWITCHES

TO 16 (6) A 400 V AC

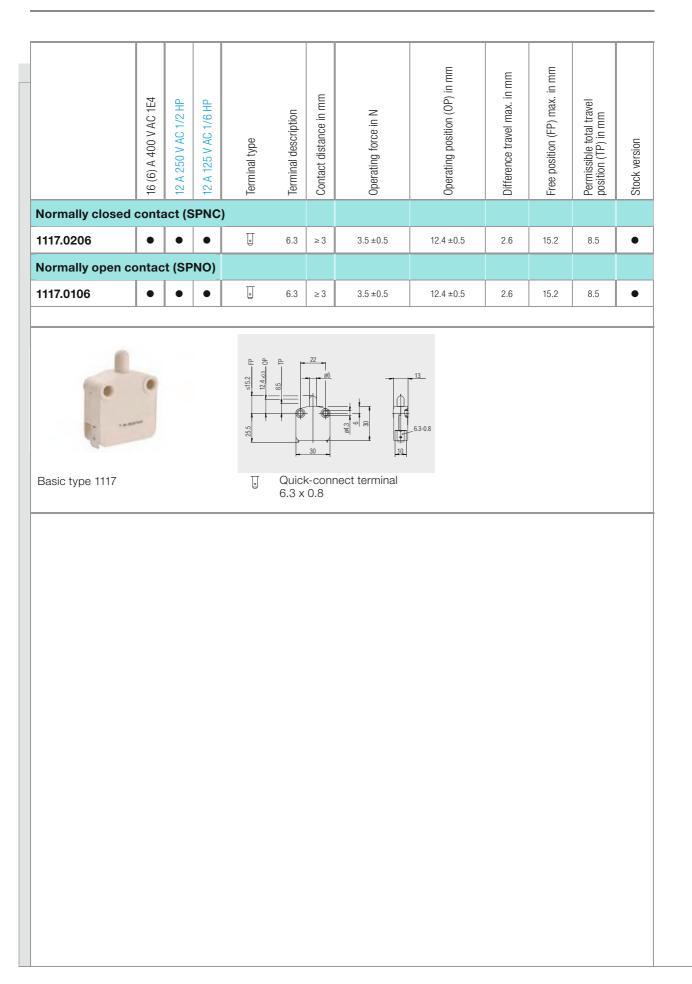

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Basic / Snap Action Switches category:

Click to view products by Marquardt manufacturer:

Other Similar products are found below :

 83228001
 01.098.1358.1
 602EN1-6B
 602EN532
 602EN535-RB
 602HE5-RB1
 604HE162
 604HE223-6B
 624HE17-RB
 6HM89
 6PA78-JM

 6SE1
 6SX1-H58
 70500840
 MBD5B1
 MBH2731
 73-316-0012
 79211759
 79218589
 7AS12
 ML-1155
 ML-1376
 831010C3.0

 831060C3.TL
 831090C2.EL
 83131904
 84212012
 8AS239
 8HM73-3
 903VB1-PG
 914CE1-6G
 PL-100
 11SM1077-H4
 11SM1077-H58

 11SM1-TN107
 11SM405
 11SM703-T
 11SM8423-H2
 11SX37-T
 11SX48-H58
 11SX55-H58
 11SM2442-T
 11SM76-T
 11SM77-H58

 11SM77-T
 11SM863-T
 11SM866
 11SX47-H58
 A7CN-1M-1-LEFT