

FEATURES

- Resistances from 0.002Ohm to 10Ohms
- Power Rating to 15Watt
- Resistance Tolerances to $\pm 0.1\%$
- TCR to $\pm 30\text{ppm/K}$
- Load Stability to 0.1%
- TO-220 Housing
- Convenient SMD D2Pak Available

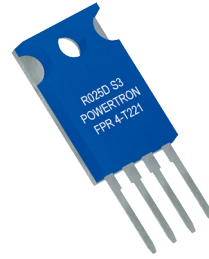


TABLE 1 – SPECIFICATIONS			
TYPE		FPR 4-T220	FPR 4-T221
Resistance Range		0.002 to 10 Ohms	
Power Rating	Free air 70°C	1.5 W	
	With heatsink	15 W	
Tolerances		1% / 2% / 5%	
from 0.002 Ohms		0.1% / 0.25% / 0.5% / 1% / 2% / 5%	
from 0.01 Ohms		0.1% / 0.25% / 0.5% / 1% / 2% / 5%	
from 0.1 Ohms			
Thermal Resistance		4.8 K/W	
Stability (1000h)		0.1% / 0.2% / 0.5% (depends on stress)	
Temperature Coefficient		$\pm 30\text{ppm/K}$ (20 to 60°C) other specifications upon request	
Voltage Proof		300 VDC	
Maximum Current		50 A	
Thermal EMF		< 0.1 $\mu\text{V/K}$	
Operating Temperature Range		-40 to 130°C	
Resistor Material		CuNiMn-Foil	
Substrate		Anodized aluminium	
Housing		PPS	
Connector Material		Cu / tinned	
Terminals		4	
Max. Torque		1 Nm	0.8 Nm

ORDERING INFORMATION
Part Number - Resistance - Contact - Tolerance
FPR 4-T220 0.01 Ohms C 0.1%

FIGURE 1 – TEMPERATURE COEFFICIENT


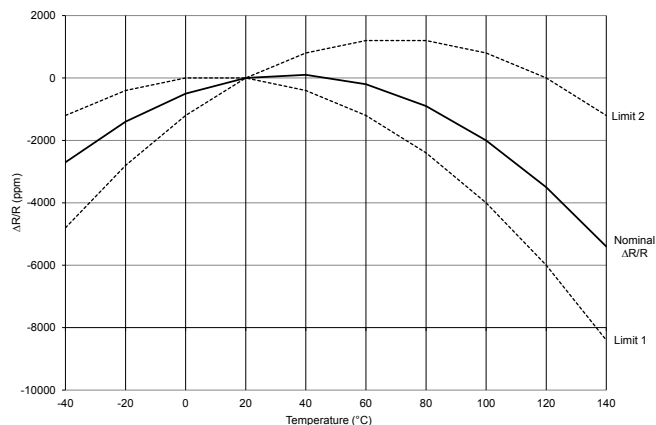


FIGURE 2 – DERATING

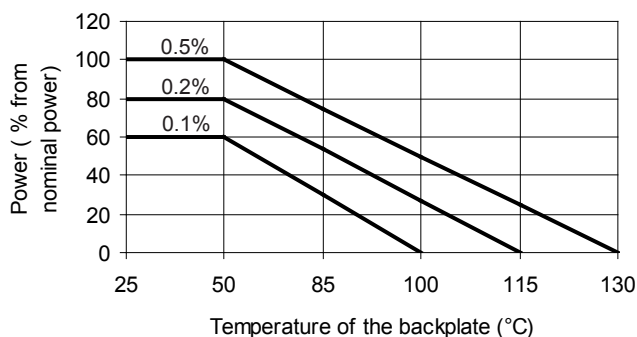

Power Rating Notes -

The FPR Series Resistors must be attached to a suitable heat-sink. The maximum internal resistor temperature is 130°C. To specify an appropriate heatsink use the following formula :

$$R_{\theta H} = \frac{T_{MAX} - (P \times R_{\theta R}) - T_A}{P}$$

Where: $R_{\theta H}$ = Thermal Resistance of Heatsink (K/W)
 $R_{\theta R}$ = Thermal Resistance of Resistor (K/W)
 T_{MAX} = Maximum Temperature of Resistor
 T_A = Ambient Temperature of Heatsink (°C)
 P = Power Through Resistor (W)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [powertron](#) manufacturer:

Other Similar products are found below :

[FPR 2-T218 2R000 C 1%](#) [FPR 4-T227 0R010 G 1% Q](#) [NPS 2-T126B 10R00 S 1%](#) [NPS 2-T126B 47R00 S 1%](#) [KHR 2-T227 10R00 G 1%](#)
[FPS 4-T220 0R500 S 1% Q](#) [FPR 2-T218 3R000 C 1%](#) [FPR 4-T221 0R220 S 1% Q](#) [SHR 4-3825 0R010 A 1% M](#) [USR 2-T220B 500R0 S 0.1%](#)
[FHR 4-3825 0R001 A 1% Q](#) [KHR 2-T227 100R0 G 1%](#) [USR 2-T220B 50R00 S 0.1%](#) [FHR 4-2321 0R001 S 1% Q](#) [USR 4-4020 1R000 D 1%](#)
[PCS 301 0R100 S 1%](#) [FPS 4-T220 0R005 S 1% Q](#) [SHR 4-3825 0R100 A 1% M](#) [FPR 2-T218 4R000 C 1%](#) [FPR 4-T227 0R001 G 1% Q](#) [FPS 4-](#)
[T220 0R010 S 1% Q](#) [SPR 4-T220 0R100 S 1% M](#) [FHR 4-3825 0R010 A 1% Q](#) [FHR 4-2321 0R010 S 1% Q](#) [NPS 2-T126B 50R00 S 1%](#)