




Features

- ✧ Very low profile - typical height of 0.68mm
- ✧ Ideal for automated placement
- ✧ Low forward voltage drop. Low power loss.
- ✧ High efficiency
- ✧ Meet MSL level 1, per J-STD-020D, lead free maximum peak of 260°C
- ✧ Solder dip 265°C max. 10 s, per JESD 22-A111
- ✧ Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC
- ✧ Halogen-free according to IEC 61249-2-21 definition
- ✧ Qualified as per AEC-Q101
- ✧ Green compound

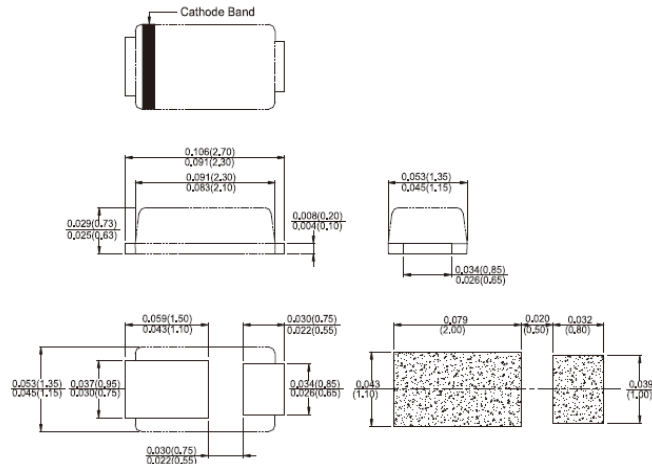

Typical Application

- ✧ For use in low voltage high frequency inverter, freewheeling, DC to DC converter, and polarity protection applications.

Mechanical Data

- ✧ Case: Micro SMA
- ✧ Molding Compound meet UL 94V-0 rate flame flammability rating.
- ✧ Terminals: Pure tin plated leads, solderable per J-STD-002B, and JESD22-B102D.
- ✧ Polarity: Indicated by Cathode Band
- ✧ Packaging: 8 mm tape per EIA Std RS-481
- ✧ Weight: 0.006 grams

Dimensions in inches and (millimeters)

Marking Diagram



- X = Device Marking Code
- Y = Year
- M = Work Month

Maximum Ratings and Electrical Characteristics

Rating at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

Type Number	Symbol	SS13M	SS14M	SS16M	Units	
Device Marking Code		A	B	C		
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	30	40	60	V	
Maximum Average Forward Rectified Current	$I_{F(AV)}$	1			A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load	I_{FSM}	25			A	
Maximum Instantaneous Forward Voltage (Note 1)	V_F	TYP.	MAX.	TYP.	MAX.	V
@ 0.5A / $T_A=25^\circ\text{C}$		0.45	-	0.51	-	
@ 0.5A / $T_A=125^\circ\text{C}$		0.35	-	0.46	-	
@ 1.0A / $T_A=25^\circ\text{C}$		0.52	0.55	0.64	0.68	
@ 1.0A / $T_A=125^\circ\text{C}$	0.46	0.50	0.57	0.60		
Maximum Reverse Current @ Rated VR	I_R	TYP.	MAX.	TYP.	MAX.	uA mA mA
$T_A=25^\circ\text{C}$		5	50	5	50	
$T_A=125^\circ\text{C}$		3	10	3	10	
$T_A=150^\circ\text{C}$		5.3	-	6.7	-	
Typical Junction Capacitance (Note 2)	C_j	50		40	pF	
Typical Thermal Resistance	$R_{\theta JA}$ $R_{\theta JL}$ $R_{\theta JC}$	125 30 40			$^\circ\text{C/W}$	
Operating Temperature Range	T_J	-55 to + 150			$^\circ\text{C}$	
Storage Temperature Range	T_{STG}	-55 to + 150			$^\circ\text{C}$	

Note 1: Pulse Test with PW=300 usec, 1% Duty Cycle

Note 2: Measured at 1 MHz and Applied Reverse Voltage of 4.0 V D.C.

RATINGS AND CHARACTERISTIC CURVES (SS13M THRU SS16M)

Fig. 1 Maximum Forward Current Derating Curve

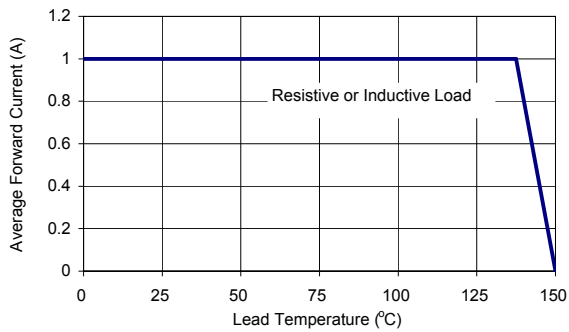


Fig. 2 Maximum Forward Surge Current

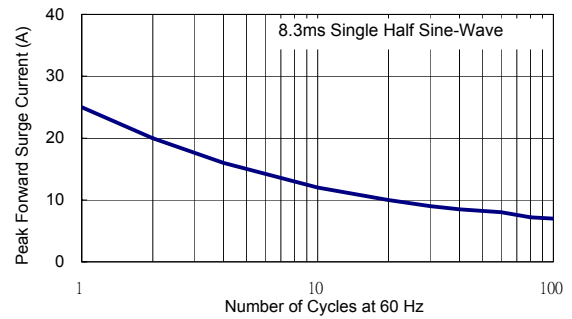


Fig. 3 Typical Forward Characteristics - SS13M/14M

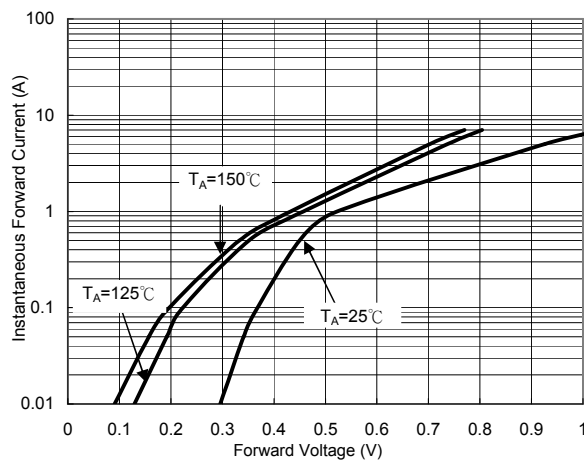


Fig. 4 Typical Forward Characteristics - SS16M

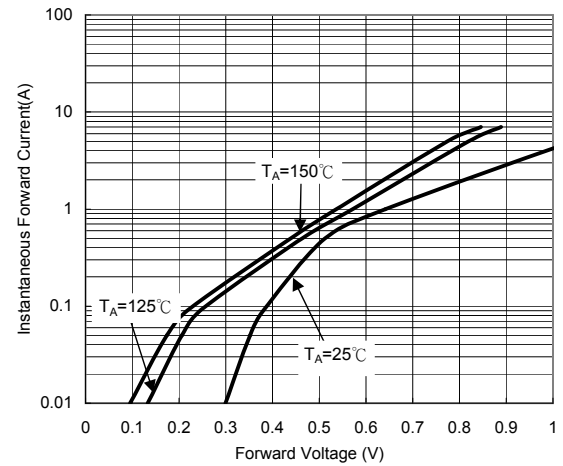


Fig. 5 Typical Reverse Characteristics - SS13M/14M


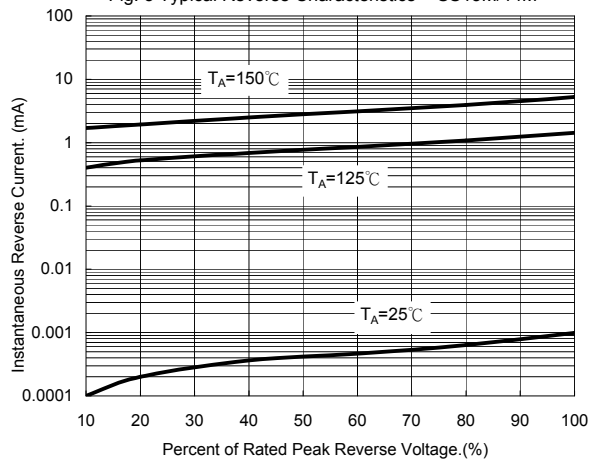


Fig. 6 Typical Reverse Characteristics - SS16M

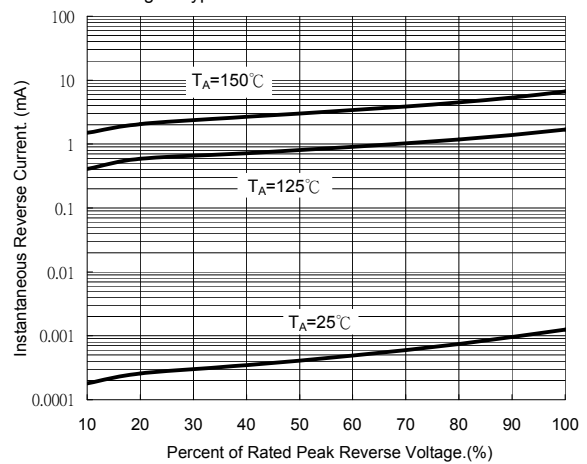

RATINGS AND CHARACTERISTIC CURVES (SS13M THRU SS16M)

Fig. 7 Typical Junction Capacitance


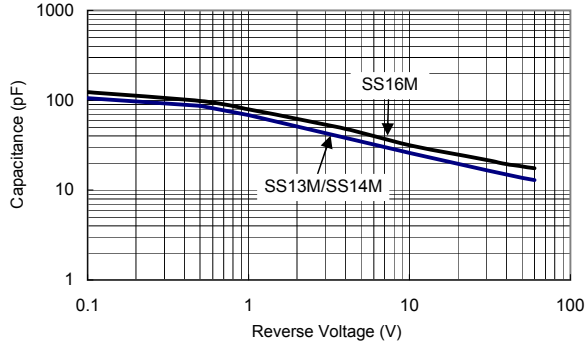


Fig. 8 Typical Transient Thermal Impedance

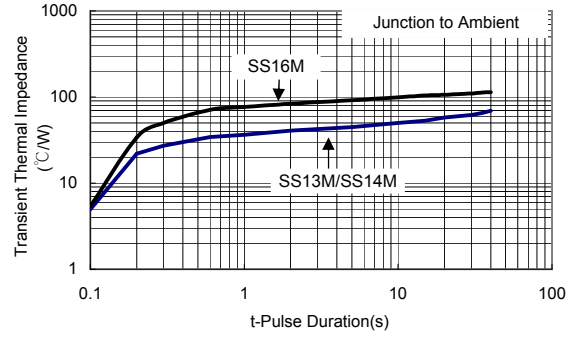

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [taiwan semiconductor manufacturer](#):

Other Similar products are found below :

[MBR1060 C0](#) [GBPC2508M](#) [GBU806](#) [RMB6S](#) [1SMA4753](#) [S1K](#) [S3D](#) [SF14](#) [ES2J](#) [SS14](#) [BAT42 R0](#) [BZW06-28](#) [RSFDL](#) [RSFML](#)
[P4SMA200A R3G](#) [ES1GL](#) [SS15](#) [RS1G](#) [1.5KE220A-R0](#) [HS5M R7G](#) [GBU1007 D2G](#) [BAT42WS-RRG](#) [BAT43WS-RRG](#) [BAV103-L1G](#)
[BYG20J-R3G](#) [BZS55C5V1-RXG](#) [BZW06-33B-R0](#) [BZW06-5V8-R0](#) [BZX55C10-R0](#) [BZX55C15-R0](#) [BZX55C6V2-R0](#) [BZX84C12-RFG](#)
[BZX84C15-RFG](#) [BZX84C5V1-RFG](#) [BZX84C5V6-RFG](#) [BZX85C10-R0G](#) [BZX85C12-R0G](#) [BZX85C15-R0G](#) [BZX85C30-R0G](#)
[BZX85C5V6-R0G](#) [BZX85C8V2-R0G](#) [BZX85C9V1-R0G](#) [1N5392G](#) [1N5398G](#) [1N5395G](#) [1N5397G](#) [GBPC2501W](#) [TSM1NB60CP](#)
[TSM2318CX](#) [TS1117BCP-5.0](#)