


TECHNICAL DATASHEET	code	74002NH
PRELIMINARY	version	2
	date	2011-04-26
4 PR CAT5E SF/UTP PATCH 26AWG FRNC	page	1/3

STANDARDS

- ISO/IEC 11801 2nd edition (September 2002) and ISO/IEC 24702
- EN 50173 – 1 (November 2002).
- TIA/EIA-568-B.2 (May 2001).

CABLE CONSTRUCTION

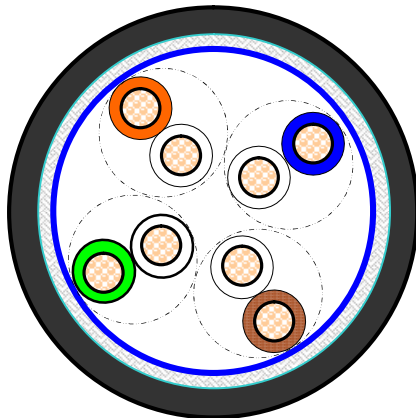

Conductor:

Material	Stranded PACW
Construction	7X0.16 mm (26 AWG)

Insulation:

Material	PP solid
Diameter	0.98 mm +/- 0.05

Pair

Pair	2 twisted insulated conductors
Number of pairs	4, all twisted together Left hand lay.
Colour code pair 1	White / Blue & Blue
Colour code pair 2	White / Orange & Orange
Colour code pair 3	White / Green & Green
Colour code pair 4	White / Brown & Brown

Tape (optional)

Material	Polyester tape
----------	----------------

Foil-Screen

Material	Al/Polyester (Al side outside)
----------	--------------------------------

Braided Screen:

Material	tinned copper
Coverage	>80%

Sheath:

Material	FRNC UV and oil resistant
Diameter	6.5 +/- 0.3 mm
Colour	Black

TECHNICAL DATASHEET	code	74002NH
PRELIMINARY	version	2
	date	2011-04-26
4 PR CAT5E SF/UTP PATCH 26AWG FRNC	page	2/3

ELECTRICAL CHARACTERISTICS

Low frequency and D.C.

D.C. resistance conductor	< 145 Ω/km
Resistance unbalance	< 2 %
D.C. insulation resistance	> 5000 MΩ.km
Dielectric strength cond. – cond. (2 sec.)	2.5 kV D.C.
Mutual capacitance	< 56 nF/km
Capacitance unbalance	< 1600 pF/km

High frequency

Velocity of propagation @ 4 – 100 MHz	≥ 0.6 c
Skew @ 1 – 100 MHz	≤ 40 ns/100m
Propagation delay @ 1 – 100 MHz	≤ 534 + 36/Vf ns/100m
Mean characteristic impedance (Zcm) @ 100 MHz	100 ± 5 Ω
Input impedance 1-100MHz	100 ± 15 Ω

Frequency	Insertion loss dB/100m (max)	NEXT (dB)	PSNEXT (dB)	ELFEXT (dB)	PS ELFEXT (dB)	Return Loss (dB)
0.772	-	67	64			19.4
1	3.2	65.3	62.3	63.8	60.8	20
4	6.0	56.3	53.3	51.8	48.8	23
10	9.5	50.3	47.3	43.8	40.8	25
16	12.1	47.2	44.2	39.7	36.7	25
20	13.6	45.8	42.8	37.8	34.8	25
25	15.3	44.3	41.3	35.8	32.8	24.3
31.25	17.1	42.9	39.9	33.9	40.9	23.6
62.5	24.8	38.3	35.4	27.9	24.9	21.5
100	32	35.3	32.3	23.8	20.8	20.1

MECHANICAL CHARACTERISTICS

Elongation at break conductor	≥ 10 %
Elongation at break insulation	≥ 100 %
Elongation at break sheath	≥ 100 %
Tensile strength sheath	≥9 Mpa

ENVIRONMENTAL AND OVERALL CHARACTERISTICS

Maximum operating voltage	450 V D.C. and 300 V A.C.
Maximum continuous current per conductor (@25°C)	1.0 A rms
Halogenfree acc to	IEC 60754-2
Oil resistant acc	IEC 60811-2-1

TECHNICAL DATASHEET	code	74002NH
PRELIMINARY	version	2
	date	2011-04-26
4 PR CAT5E SF/UTP PATCH 26AWG FRNC	page	3/3

Maximum pulling tension	80 N
Minimum setting/bending radius	35/70 mm
Temperature range during installation	-5 / +50 °C
Temperature range during operation	-40 / +80 °C
Flame propagation	IEC 60332-1



Belden CDT believes this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [belden manufacturer](#):

Other Similar products are found below :

[HIPWP4LA](#) [HIPWP2LA](#) [49905A 060S2](#) [49907A 060S2](#) [8916-GRN/YEL-500](#) [8916-YEL-500](#) [8918-GRN/YEL-100](#) [8918-GRY-1000](#) [8919-DK-BLU-100](#) [8920-008-1000](#) [8920-BRN-1000](#) [8920-GRY-1000](#) [5T00UP 008500](#) [7810A-BLK-500](#) [7918A-BLK-1000](#) [7934A-BLK-1000](#) [7937A-BLK-1000](#) [8019-100](#) [8080](#) [8108-060-1000](#) [8125-CHR-100](#) [8132-CHR-1000](#) [8133-CHR-1000](#) [8155-CHR-1000](#) [8162-060-1000](#) [8162-CHR-1000](#) [8164-CHR-100](#) [8164-CHR-1000](#) [8185-CHR-100](#) [8205-CHR-1000](#) [8214-010-1000](#) [8221-BLK-1000](#) [8233-010-1000](#) [8233-BLK-1000](#) [8237-BLK-500](#) [8238-BLK-500](#) [8241-006-U1000](#) [8241A-BLK-1000](#) [8241F-RED-MATTE-1000](#) [8263-BLK-U1000](#) [8279-BLK-1000](#) [8281-003-1000](#) [8281 010500](#) [83000 002100](#) [83002 0101000](#) [83003-006-500](#) [83003-VIO-500](#) [83004-RED-100](#) [83008 0091000](#) [83008-WHT-1000](#)