


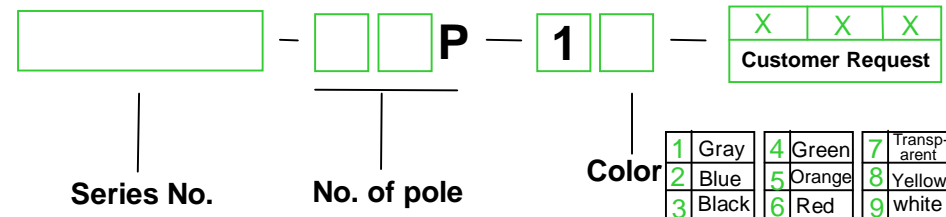





Approval		CE	
Electrical			
Standard	UL	IEC	
Rated voltage	600V	800V	
Rated current	6.3A	6.3A	
Wire size	24-12AWG	0.2-4.0mm ²	
T/W/End plate	8.2/72.5/-mm		
Height(NS35:7.5/NS35:15/NS32)	56.5/64/61.5mm		
Rated surge voltage/Contamination class	6KV/3		
Stripping length	8mm		
Screw thread/Tightening torque	M3/0.5N.m/4.5Lb-in		
Internal cylindrical gage	A4		
Insulating material/Inflammability class	PA/V-0		
Specification		Model	Pieces
(1)Fuse terminal block		PC 4-HE	50
(2)Insertion bridge 		EB 2-8	100
		EB 3-8	50
		EB 10-8	10
(3)Test plug socket insulated 			
(4)Zack strip 		ZB8	

HOW TO ORDER :



 mm (INCH)	 DEGSON ELECTRONICS CO., LTD.
 THROANGLE PROJECTION	NAME PC 4-HE

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Relay Sockets & Fixings](#) category:

Click to view products by [Degson](#) manufacturer:

Other Similar products are found below :

[M41G](#) [7-1616360-5](#) [8000-DG2-5](#) [GDA12HA](#) [GDA12HD](#) [GDA12SA](#) [GDA12SD](#) [GDA16HD](#) [GDA22HA](#) [GDA95A](#) [GDA95D](#) [GFX20](#)
[GUA1](#) [GUA2-11](#) [GUA4-04](#) [GUA4-31](#) [GUM5R](#) [GUR-120](#) [GUR-24](#) [GUR-240](#) [GUR-277](#) [GURX-277](#) [GUW12](#) [GUW95](#) [GUZ32S](#) [GUZ63L](#)
[GUZ95L](#) [AS-11](#) [AX-4MS-40](#) [1611434-8](#) [2-1608090-3](#) [PB-16](#) [SM2S-61](#) [SQ9Z-C](#) [SYSWINSMP](#) [AR-12MW](#) [GDA16HA](#) [GDA16SA](#)
[GDA16SD](#) [GDA22HD](#) [GDA22SA](#) [GDA22SD](#) [GDA32HA](#) [GDA32HD](#) [GDA32SA](#) [GDA32SD](#) [GDA63A](#) [GDA63D](#) [GFX02](#) [GFX11](#)