




SMD Tweezers


- » Smooth handling and positioning of all SMD components
- » Different tips and angles for specific applications
- » Satin antiglare finish and ergonomic design
- » Good corrosion resistance to most chemicals & acids
- » Available as reverse action model




SM100.SA
4 1/2" 115 mm
Reverse action tweezers for handling SMDs for PCBs





SM101.SA
4 1/2" 115 mm
Reverse action tweezers for soldering and de-soldering 8, 14 or 16 Lead SMDs



SM102.SA
4 1/2" 115 mm
Reverse action tweezers for soldering and de-soldering 20, 28, 44 and 68 LCCC and PLCC pad devices





SM103.SA - Farnell 3480549
4 1/2" 115 mm
For handling and positioning 2 and 3 lead SOT packages at 45° angle



SM104.SA - Farnell 3480550

4 3/4" 120 mm


For handling and positioning 3 lead SOT packages, monolithic chip capacitors, etc.



SM105.SA

4 3/4" 120 mm



Special design for positioning all SOT packages vertically



SM106.SA

4 3/4" 120 mm




For positioning all SOT packages horizontally; flat base tips (4 mm long)



SM107.SA - Farnell 3480562

4 3/4" 120 mm




For positioning all flat devices at 60° angle

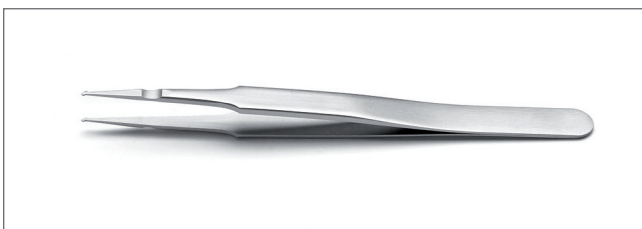

SM108.SA - Farnell 3480574

4 3/4" 120 mm



For positioning and soldering 1mm wide components

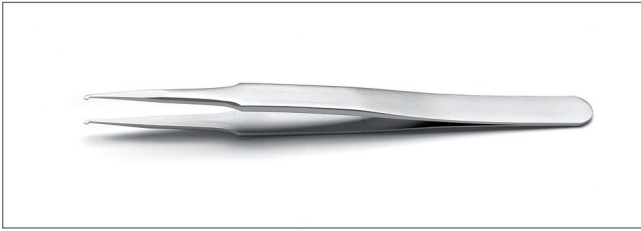

SM109.SA - Farnell 2402088

4 1/4" 120 mm


Same as SM108 but with 45° tips without anti-crush feature



SM110.SA

4 3/4" 120 mm


For positioning monolithic chips capacitors, grooved tips



SM111.SA - Farnell 3480586

4 3/4" 120 mm


For positioning 5 mm monolithic chip capacitors; flat base grooved tips (2 mm long)



SM112.SA

4 3/4" 120 mm




For positioning 5 mm monolithic chip capacitors at 60°, grooved tips



SM113.SA

4 3/4" 120 mm



3 mm long tips bent at 60° angle one forked blade lead entry

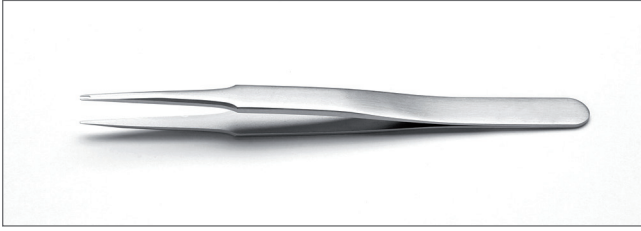

SM114.SA

4 3/4" 120 mm




Same as SM113 but with straight tips for vertical holding



SM115.SA - Farnell 3480598

4 3/4" 120 mm


Grooved tips at 30° angle for holding and positioning cylindrical devices (up to 1 mm diam.)

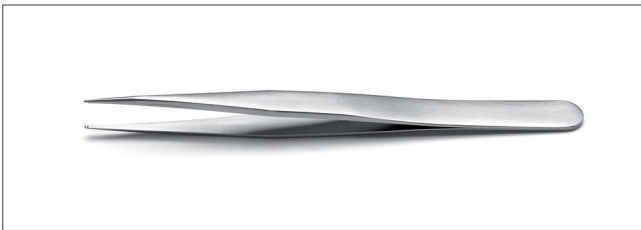

SM116.SA - Farnell 4681642

4 3/4" 120 mm

Grooved straight tips, for vertical positioning of cylindrical devices (up to 1 mm diam. or more)



SM117.SA - Farnell 3480604

4 3/4" 120 mm

For positioning SOT packages at 30° angle



K5SMDF - Farnell 3972963

SMD precision tweezers set

SM103, SM107, SM108, SM111, SM115 in top quality hard/foam wallet

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ideal-tek](#) manufacturer:

Other Similar products are found below :

[56A.SA](#) [ALCRON](#) [BON-102A](#) [2WF.SA](#) [4313 SM](#) [5340](#) [K5HP.SA](#) [E6024](#) [5CF.SA](#) [MPT123.CP](#) [3C.TA](#) [PCSA-4.2](#) [UVO0000300](#)
[AM4023X](#) [EX2175](#) [3C.SA.DR.1](#) [14A.C.DR](#) [242SVR.SA](#) [2A.NC](#) [3.NC](#) [3XCF.SA](#) [4.SA.DR](#) [5.SA.T](#) [51S.SA](#) [72MZ.SA](#) [8507](#) [2AMZ.SA.0](#)
[3C.SA.NE.6](#) [3CPR.SA.1](#) [AA.SA.DN.6](#) [KCFR](#) [00D.SA.0](#) [812.01](#) [K5SMD.SA](#) [M12102](#) [BON-102](#) [BON-102S](#) [NLP-1](#) [PEN-TEK](#) [35A SA](#)
[818.01](#) [8X](#) [A242CP](#) [E5140](#) [E5350](#) [EX175](#) [EX440](#) [AA.SA.DR.6](#) [7.SA.DR.1](#) [E5160L](#) [E5162](#) [00CFR.SA](#)