

FULLY SEALABLE TITANUM lenses for Dragon

OSRAM



- Use with all Osram Dragon series of white and monochromate LEDs, both OLD and NEW package types
- NEW smooth spot and oval versions with improved efficiency and color uniformity also compatible with the new Dragon package
- Lens material optical grade PMMA with high UV and temperature resistance (105°C/220°F)
- High optical efficiency, up to 90%
- No lens holder. Fastening to heat sink with a PU foam adhesive tape of automotive grade
- Lens foot can be potted with resin without losses in optical efficiency (**fully sealed construction** of luminaire possible)
- Diameter 26 mm (approximately 1")
- Easy build of a complete luminaire using TITANUM, Dragon® and heat sink
- All lens types have the same outer dimensions, which allow a cross use of them in the same lighting fixture.

ORDERING CODE	FWHM Angle
CA10318_Titanum-O-SS	±7°
CA10968_Titanum-O-SS_MetalPlated	±7°
CA10252_Titanum-O-M	±13°
CA10319_Titanum-O-O	±3° x ±18°
CA10864_Titanum-O-OC	±3° x ±18°
CA11240_Titanum-O-O-90	±3° x ±18°
CA11241_Titanum-O-OC-90	±3° x ±18°
CA10244_Titanum-O-W	±35°
	CA10318_Titanum-O-SS CA10968_Titanum-O-SS_MetalPlated CA10252_Titanum-O-M CA10319_Titanum-O-O CA10864_Titanum-O-OC CA11240_Titanum-O-O-90 CA11241_Titanum-O-OC-90

LENS TYPES

SMOOTH SPOT lens is a pure collimator lens with light mixing properties. It smoothens the beam pattern and makes a uniform color distribution over the whole beam angle. Light intensity is lower than for the REAL SPOT lens. SMOOTH SPOT lens is recommended for white light applications, where pleasant, high-quality illumination is wished.

OVAL lens is optimal for cases where a narrow stripe of light is wished. If a wider vertical distribution is needed, please consider LEDIL OSS-O with wider vertical distribution and a color mixing structure.


© Ledil Oy – Subject to change without prior notice

<u>www.ledil.com</u> email: ledil@ledil.com FAX: +358-2-733 8001



MEASUREMENTS

TITANUM-SS

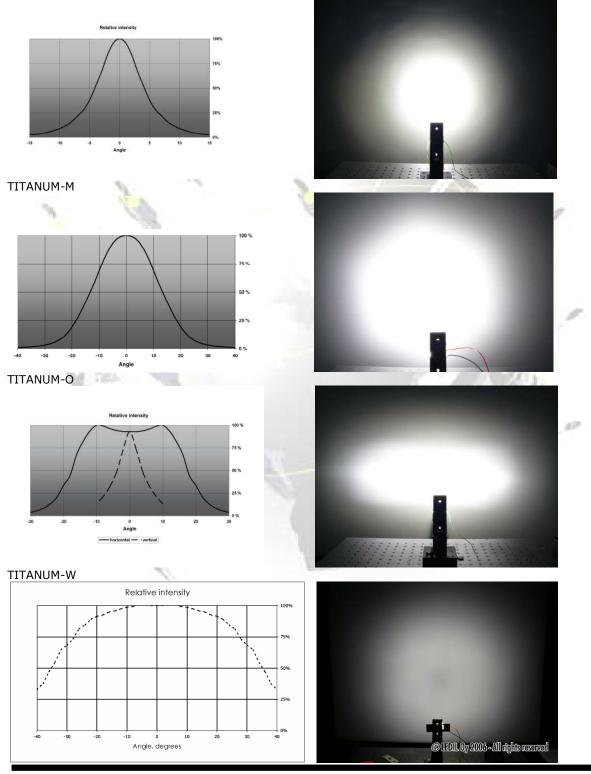


 $\ensuremath{\mathbb{C}}$ Ledil Oy – Subject to change without prior notice

Ledil Oy Tehdaskatu 13 FIN-24100 SALO, Finland www.ledil.com email: ledil@ledil.com FAX: +358-2-733 8001





PHOTOGRAPHS

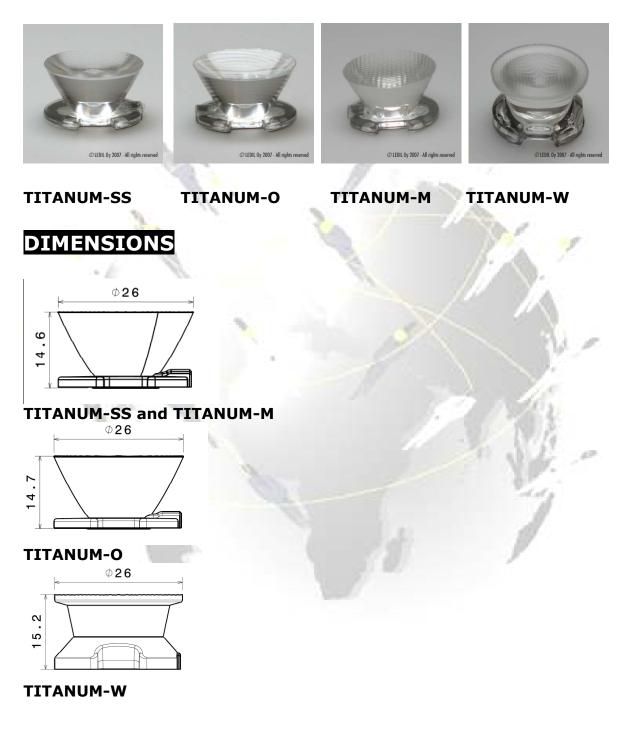



PACKAGING



Lenses are packed on plastic trays of 77 lenses. One box contains 13 trays, i.e. 1001 lenses.

SPECIAL VERSIONS

Special versions available on request, e.g. fully metallized outer surface allowing full potting of lens up to the top surface or different packing methods.



© Ledil Oy – Subject to change without prior notice

<u>www.ledil.com</u> email: ledil@ledil.com FAX: +358-2-733 8001



DRAWINGS S В \triangleleft CA10319-0-0 CA11240-0-0-90 4 4 Isometric view Light beam direction 20 7 G 3 3 Bottom view Front view 2 9 17 Material: PMMA 0 14.7 Note: Tape is 0.4mm thick, 4 add 0.2mm to shown dim. -2 2 for assembly height S S 0 CA10318_Titanum-0-SS CA10319_Titanum-0-0 CA10968_Titanum-O-SS(MetalPlated) CA11240 Titanum-0-0-90(turned pattern) CA11241_Titanum-0-0C-90(MetalPlated) This drawing is our property Ledil Oy Tehdaskatu 13 It can't be reproduced Ч FIN-24100 SALO or communicated without Finland our written agreement. DRAWING TITLE DRAWN BY DATE Datasheet Titanum-O Lens pv 01.12.2009 1 CHECKED BY DATE SIZE DRAWING NUMBER REV 10318, 10319, 11240 tk 25.03.2008 0.1 A4 DESIGNED BY DATE SHEET SCALE 1:1 WEIGHT(g) 1/1 25.03.2008 hh D A

 $\ensuremath{\mathbb{C}}$ Ledil Oy – Subject to change without prior notice

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for LED Lenses category:

Click to view products by Ledil manufacturer:

Other Similar products are found below :

 131A-303G
 131A-304R
 139A-403R
 139A-403A
 160A-604R
 160A-604Y
 SMB_200_GTP
 SMQ_250_ATP
 SMS_172_RTP
 SQB_400_ATP

 SSN-LX13049L-CD
 SSN-LX18754A
 SSN-LX18754C
 2817
 CLR_301_YTP
 CMC_313_ATP
 3121
 3125
 39-30-W03
 4344
 4623

 4745
 4747
 3111
 3114
 3115
 3121
 3125
 4327
 4743
 4745
 4757
 SSN-LX690L1-C
 SQL_360_YTP
 SMQ_250_BTP
 3114

 3113
 CMS444CTP
 1125-227-000
 4317
 4347
 4741
 4316
 4343
 4345
 4345