
RoHS Compliant Pb - Lead Free	Ltr	Revisions	Date	Appr

## **Electrical Specifications:**

Nominal Frequency	6.000	MHz	
Mode of Oscillation	Fundamental	-	
Frequency Tolerance at 25°C	±30	PPM Max	
Frequency Stability over Temperature Range	±30		
Operating Temperature Range (Extended)	-40 to +85	• C	
Storage Temperature Range	-55 to +125		
Aging per Year	±3	PPM Max	
Load Capacitance	12		
Shunt Capacitance (Maximum)	7	— pF	
Equivalent Series Resistance (ESR)	110	Ohms Max	
Drive Level	100 Typ - 500 Max	uW	
Solder Reflow Characteristics	+260 for 10 s Max	°C	

## **Mechanical Specifications:**

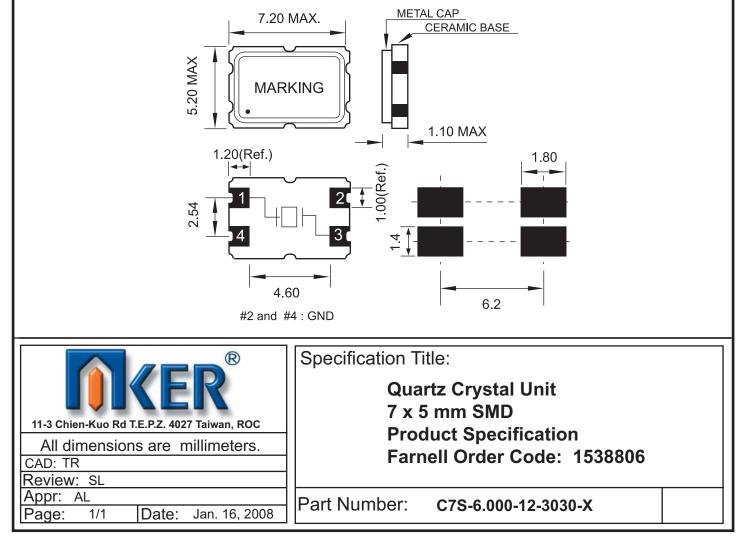

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for aker manufacturer:

Other Similar products are found below :

 SMA-027000-3BL4TD
 CXA-012000-3F4D40
 CXA-016384-3D4X20
 CXA-026000-3F7F20
 C-3.579545-18-3050-X
 SMF-020000-5BC6T0

 SMA-040000-5CL4T5
 CXAN-025000-3F12D40
 C-8.000-18-3050-X
 CXAN-040000-3F15D41
 SMBN-033333-7BL4T00
 CXA-026000 

 3FCF20
 CA-18.432-18-3050-X
 C-4.194304-18-3050-X
 CXA-039000-7F1X40
 S33305-50.000-X
 C3E-14.31818-12-3030-X
 S53305-50.000-X

 X
 S73305-10.000-X-15
 C6S-18.432-12-3030-X
 C7S-8.000-12-50100-X1
 C-24.576-18-3050-X
 C7S-6.000-12-50100-X1
 CAA 

 4.194304-18-3050-X
 C3E-14.7456-12-50100-X1
 C6S-16.000-12-3030-X
 S73305T-24.000-X-15-R
 CA-8.000-18-3050-X
 C3E 

 16.000-12-50100-X1
 S73305-12.000-X-15
 49S-008000-FDRD10
 S73305-14.7456-X-15
 C3E-18.432-12-3030-X
 C3E-20.000-12-50100-X1

 CAA-3.579545-18-3050-X
 C7S-20.000-12-3030-X
 C6S-24.000-12-3030-X
 C3E-12.000-12-3030-X
 CA-25.000-18-3050-X
 CAA 

 16.000-18-3050-X
 49SN-011059-FX16X10
 C7S-24.000-12-50100-X1
 CA4-8.000-18-3050-X
 C5S-20.000-12-3030-X
 S7A33025-156.250-L 

 X-R
 S7A33025-100.000-L-X-R
 S3A25025-125.000-L-X-R
 S3A25025-50.000-L-X-R
 S5A3303-125.000-L-X-R