
Technical data sheet

Tieloser Weg 6 D - 32457 Porta Westfalica

ENK-SU1Z Riw

608.1167.008

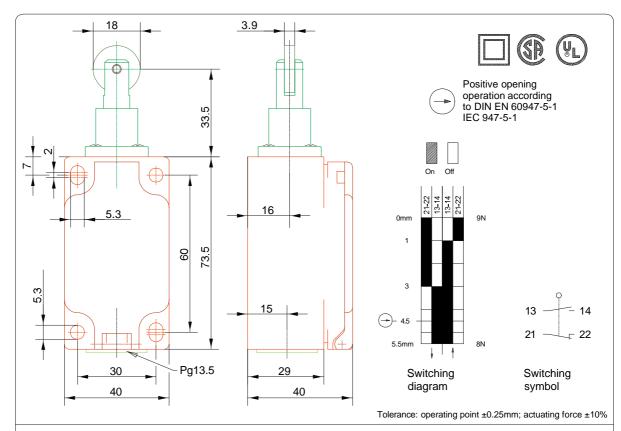

Mechanical features

Thermoplast, glass fibre reinforced Enclosure: Thermoplast, glass fibre reinforced Cover:

Actuator: St-Roller

Ambient air temperature: -30°C up to +80°C

Contact type: 1 NC-contact, 1 NO-contact (Zb)

Mechanical life: 10x10⁶ switch operations

Switch frequency: max. 100/min 4 x M5 Mounting:

Connection type: 4 screw connectors (M3,5)

Cable entry size: 1 x Pg13.5 Weight: approx. 0,16kg

Electrical features

Max. Voltage: 500 V AC Max. enduring current: Ith 10A

Max. inrush current: according to IEC 947-5-1, AC 15, DC 13

according to EN 60204; EN 60947-1; EN 60947-5-1 Standards: Protection class (IP-Code): IP65 according to EN 60529; DIN VDE 0470 T1

10A 300V AC, A300 (same polarity) CSA: Short circuit protection: 10A slow-acting, 16A quick-acting

Approach possibilities

By loosening 4 screws it is possible to turn the actuator through 90° so that 2 approach possibilities can be achieved.

The moving parts should be oiled periodically
The planned protection class (IP-Code) is valid only at closed cover

and when using an at least equivalent cable gland.

Copies are not retreated in case of alternations.

Schutzvermerk nach DIN 34 beachten Copyright reserved

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Limit Switches category:

Click to view products by Bernstein manufacturer:

Other Similar products are found below:

6LS2-4PG 5ML1-E1 5ML31 LZG1 LZL1-6C 622EN114-R 622EN18-6 622EN224-6B 622EN230 622EN237-R 622EN69-3 622EN85-RB

MA-10019 6PA109 7LS51 83547001 83725002 83830001 83840001 83840701 83841001 83870104 83881140 8AS42 8LS10 8LS125
4PG 8LS152-4PGN20 914CE16-3A 914CE16-AQ 914CE3-3L1 915PA10 91MCE16-P2O 924CE16-Y3 924CE1-S6 924CE1-T25A

924CE1-T3 924CE1-T9A 924CE2-T9 924CE31-Y20-X5 924CE31-Y3L1 GL-10054 GL-85710 GL-85714 GLAB26J2B GLDB03C-6

GLZ324 PS21R-NT11N7-YK0 D4A-1106N D4A1201N D4A-3E02N