



SMD series RTD Platinum Sensor




INNOVATIVE SENSOR TECHNOLOGY

For surface mounted temperature applications

Benefits & Characteristics

- Excellent long-term stability
- Low self-heating
- Fast response time
- Class A available
- Customer specific sensor available upon request

Illustration

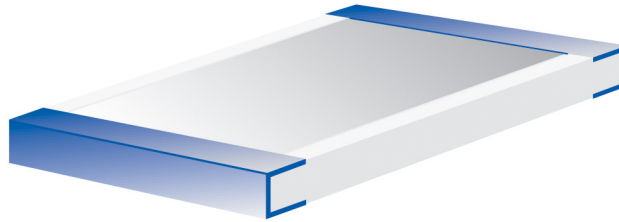

Technical Data

Operating temperature range:	2P	-50 °C to +150 °C
	3P	-50 °C to +250 °C
	4P	-50 °C to +250 °C
Nominal resistance:*	100 Ohm at 0 °C	
	500 Ohm at 0 °C	
	1000 Ohm at 0 °C	
Characteristics curve:*	3850 ppm/K	
Long term stability:	< 0.04 % at 1000 h at 130 °C	
		IST AG reference
Tolerance class (dependent on temperature range):*	DIN EN 60751 F0.15	A
	DIN EN 60751 F0.3	B
	DIN EN 60751 F0.6	C
Contacts:*	2P	tin-coated (96.5Sn/3Ag/0.5Cu), LMP lead-free, (reflow soldering)
	3P	tin-coated (5Sn/93.5Pb/1.5Ag), HMP, (reflow soldering)
	4P	Ni/Au-coated, (solderable coating)
Solderability:	235 °C ≤ 8 s (DIN IEC 68 T2-20, Ta Meth. 1)	
Resistance to soldering heat: ¹⁾	260 °C 10 s (DIN IEC 68 T2-20, Ta Meth. 1A)	
	<small>1) The soldering process can influence accuracy</small>	
Recommended applied current: ²⁾	1 mA at 100 Ohm	
	<small>2) Self-heating must be considered</small>	
	0.5 mA at 500 Ohm	



SMD series RTD Platinum Sensor



INNOVATIVE SENSOR TECHNOLOGY

For surface mounted temperature applications

Packaging: 0.3 mA at 1000 Ohm
< 100 pcs in bags
≥ 100 pcs taped on reel (sensor side up or sensor side down)

* Customer specific alternatives available

Order Information - 2P (tin-coated (96.5Sn/3Ag/0.5Cu), LMP lead-free, reflow soldering)

Packed in bags (< 100 pcs)

Size	Dimensions (L x W x H in mm)	F0.15 (class A)	F0.3 (class B)
------	------------------------------	-----------------	----------------

Nominal resistance: 100 Ohm at 0 °C

0805	2 x 1.2 x 0.4	P0K1.0805.2P.A	P0K1.0805.2P.B
Order code		010.01147	010.01146
1206	3.0 x 1.6 x 0.4	P0K1.1206.2P.A	P0K1.1206.2P.B
Order code		010.01131	010.01132

Nominal resistance: 500 Ohm at 0 °C

0805	2 x 1.2 x 0.4	P0K5.0805.2P.A	P0K5.0805.2P.B
Order code		010.01153	010.01154
1206	3.0 x 1.6 x 0.4	P0K5.1206.2P.A	P0K5.1206.2P.B
Order code		010.01141	010.01127

Nominal resistance: 1000 Ohm at 0 °C

0805	2 x 1.2 x 0.4	P1K0.0805.2P.A	P1K0.0805.2P.B
Order code		010.01157	010.01047
1206	3.0 x 1.6 x 0.4	P1K0.1206.2P.A	P1K0.1206.2P.B
Order code		010.01136	010.01135

Taped on reel - sensor side up or sensor side down (≥ 100 pcs)

Size	Dimensions (L x W x H in mm)	F0.15 (class A)	F0.3 (class B)
------	------------------------------	-----------------	----------------

Nominal resistance: 100 Ohm at 0 °C

0805	2 x 1.2 x 0.4	Sensor side up	P0K1.0805.2P.A.S	P0K1.0805.2P.B.S
Order code			010.02347	010.02276
1206	3.0 x 1.6 x 0.4	Sensor side up	P0K1.1206.2P.A.S	P0K1.1206.2P.B.S
Order code			010.02233	010.02275



TEMPERATURE



FLOW



HUMIDITY



CONDUCTIVITY

SMD series RTD Platinum Sensor



INNOVATIVE SENSOR TECHNOLOGY

For surface mounted temperature applications

Size	Dimensions (L x W x H in mm)		F0.15 (class A)	F0.3 (class B)
0805	2 x 1.2 x 0.4	Sensor side down	P0K1.0805.2P.A.S	P0K1.0805.2P.B.S
Order code			010.01148	010.01126
1206	3.0 x 1.6 x 0.4	Sensor side down	P0K1.1206.2P.A.S	P0K1.1206.2P.B.S
Order code			010.01104	010.01105

Nominal resistance: 500 Ohm at 0 °C

0805	2 x 1.2 x 0.4	Sensor side down	P0K5.0805.2P.A.S	P0K5.0805.2P.B.S
Order code			010.01156	010.01155
1206	3.0 x 1.6 x 0.4	Sensor side down	P0K5.1206.2P.A.S	P0K5.1206.2P.B.S
Order code			010.01142	010.01117

Nominal resistance: 1000 Ohm at 0 °C

0805	2 x 1.2 x 0.4	Sensor side up	P1K0.0805.2P.A.S	P1K0.0805.2P.B.S
Order code			010.02235	010.02236
1206	3.0 x 1.6 x 0.4	Sensor side up	P1K0.1206.2P.A.S	P1K0.1206.2P.B.S
Order code			010.02224	010.02229
0805	2 x 1.2 x 0.4	Sensor side down	P1K0.0805.2P.A.S	P1K0.0805.2P.B.S
Order code			010.01158	010.01125
1206	3.0 x 1.6 x 0.4	Sensor side down	P1K0.1206.2P.A.S	P1K0.1206.2P.B.S
Order code			010.01106	010.01107

Order Information - 3P (tin-coated (5Sn/93.5Pb/1.5Ag), HMP, reflow soldering)

Packed in bags (< 100 pcs)

Size	Dimensions (L x W x H in mm)		F0.15 (class A)	F0.3 (class B)
0805	2 x 1.2 x 0.4		P0K1.0805.3P.A	P0K1.0805.3P.B
Order code			010.00928	010.00929
1206	3.0 x 1.6 x 0.4		P0K1.1206.3P.A	P0K1.1206.3P.B
Order code			010.00166	010.00165

Nominal resistance: 500 Ohm at 0 °C

0805	2 x 1.2 x 0.4		P0K5.0805.3P.A	P0K5.0805.3P.B
Order code			010.00934	010.00935



TEMPERATURE



FLOW



HUMIDITY



CONDUCTIVITY

SMD series RTD Platinum Sensor



INNOVATIVE SENSOR TECHNOLOGY

For surface mounted temperature applications

Size	Dimensions (L x W x H in mm)	F0.15 (class A)	F0.3 (class B)
1206	3.0 x 1.6 x 0.4	P0K5.1206.3P.A	P0K5.1206.3P.B
Order code		010.00403	010.00208

Nominal resistance: 1000 Ohm at 0 °C

0805	2 x 1.2 x 0.4	P1K0.0805.3P.A	P1K0.0805.3P.B
Order code		010.00922	010.00923
1206	3.0 x 1.6 x 0.4	P1K0.1206.3P.A	P1K0.1206.3P.B
Order code		010.00326	010.00323

Taped on reel - sensor side up or sensor side down (≥ 100 pcs)

Size	Dimensions (L x W x H in mm)	F0.15 (class A)	F0.3 (class B)
------	------------------------------	-----------------	----------------

Nominal resistance: 100 Ohm at 0 °C

0805	2 x 1.2 x 0.4	Sensor side down	P0K1.0805.3P.A.S	P0K1.0805.3P.B.S
Order code			010.01150	010.01149
1206	3.0 x 1.6 x 0.4	Sensor side down	Upon request	P0K1.1206.3P.B.S
Order code				010.01145

Nominal resistance: 500 Ohm at 0 °C

0805	2 x 1.2 x 0.4	Sensor side down	Upon request	P0K5.0805.3P.B.S
Order code				010.01152
1206	3.0 x 1.6 x 0.4	Sensor side down	P0K5.1206.3P.A.S	P0K5.1206.3P.B.S
Order code			010.01144	010.01143

Nominal resistance: 1000 Ohm at 0 °C

0805	2 x 1.2 x 0.4	Sensor side down	P1K0.0805.3P.A.S	P1K0.0805.3P.B.S
Order code			010.01160	010.01159
1206	3.0 x 1.6 x 0.4	Sensor side down	Upon request	P1K0.1206.3P.B.S
Order code				010.01043



SMD series RTD Platinum Sensor



INNOVATIVE SENSOR TECHNOLOGY

For surface mounted temperature applications

Order Information - 4P (Ni/Au-coated, solderable coating)

Packed in bags (< 100 pcs)

Size	Dimensions (L x W x H in mm)	F0.15 (class A)	F0.3 (class B)
Nominal resistance: 100 Ohm at 0 °C			
0805	2 x 1.2 x 0.4	P0K1.0805.4P.A	P0K1.0805.4P.B
Order code		010.00930	010.00931
1206	3.0 x 1.6 x 0.4	P0K1.1206.4P.A	P0K1.1206.4P.B
Order code		010.00169	010.00168

Nominal resistance: 500 Ohm at 0 °C

0805	2 x 1.2 x 0.4	P0K5.0805.4P.A	P0K5.0805.4P.B
Order code		010.00936	010.00937
1206	3.0 x 1.6 x 0.4	P0K5.1206.4P.A	P0K5.1206.4P.B
Order code		010.00404	010.00209

Nominal resistance: 1000 Ohm at 0 °C

0805	2 x 1.2 x 0.4	P1K0.0805.4P.A	P1K0.0805.4P.B
Order code		010.00925	010.00924
1206	3.0 x 1.6 x 0.4	P1K0.1206.4P.A	P1K0.1206.4P.B
Order code		010.00327	010.00324

Taped on reel - sensor side up or sensor side down (≥ 100 pcs)

Size	Dimensions (L x W x H in mm)		F0.15 (class A)	F0.3 (class B)
Nominal resistance: 100 Ohm at 0 °C				
1206	3.0 x 1.6 x 0.4	Sensor side up	P0K1.1206.4P.A.S	Upon request
Order code			010.02501	



SMD series RTD Platinum Sensor



INNOVATIVE SENSOR TECHNOLOGY



For surface mounted temperature applications



Nominal resistance: 1000 Ohm at 0 °C

0805	2 x 1.2 x 0.4	Sensor side up	P1K0.0805.4P.A.S	Upon request
Order code			010.02679	
0805	2 x 1.2 x 0.4	Sensor side down	P1K0.0805.4P.A.S	P1K0.0805.4P.B.S
Order code			010.02605	010.02619
1206	3.0 x 1.6 x 0.4	Sensor side up	P1K0.1206.4P.A.S	Upon request
Order code			010.02441	



Order Information

RTD Platin Sensor

Secondary reference



INNOVATIVE SENSOR TECHNOLOGY

Material

P = platin (Pt 3850 ppm/K)

Resistance in Ohm at 0 °C

Chip size in mm

Operating temperature range

1	= -50 °C to +150 °C	4	= -50 °C to +250 °C
2	= -50 °C to +150 °C / 250 °C	5	= -50 °C to +400 °C
3	= -50 °C to +250 °C	6	= -50 °C to +600 °C

Contacts (SMD/FC)


(2)P = tin-coated (96.5Sn/3Ag/0.5Cu), LMP lead-free, (reflow soldering)	(1)FC = tin-coated, LMP lead-free, 96.5Sn/3Ag/0.5Cu (reflow soldering)
(3)P = tin-coated (5Sn/93.5Pb/1.5Ag), HMP, (reflow soldering)	(2)FC = tin-coated, soldering depot, HMP, 5Sn/93.5Pb/1.5Ag (reflow soldering)
(4)P = Au-coated, (solderable coating)	(3)FC = Au-Pads (bonding pads), various types available
	(5)FC = reinforced thin film Pt-pads (solderable pads)
	(6)FC = thick film Pt-pads (weldable)

Tolerance class

A ¹⁾ = DIN EN 60751 F0.15	C = DIN EN 60751 F0.6
B = DIN EN 60751 F0.3	K = customer specific

Special

M = metallized backside
S = special

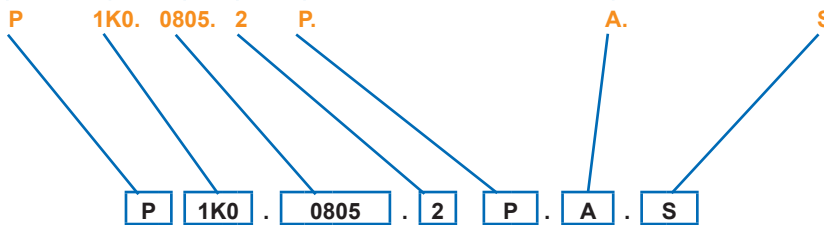

1) Class A only available as SMD

DTPSMD_EZ.1



INNOVATIVE SENSOR TECHNOLOGY

Innovative Sensor Technology IST AG, Stegrütistrasse 14, CH-9642 Ebnet-Kappel, Switzerland,
Phone: +41 (0) 71 992 01 00 | Fax: +41 (0) 992 01 99 | E-mail: info@ist-ag.com | Web: www.ist-ag.com



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Board Mount Temperature Sensors](#) category:

Click to view products by [1st Innovative Sensor](#) manufacturer:

Other Similar products are found below :

[5962-8757102XA](#) [66F115](#) [MCP9808-EMS](#) [MCP98242T-BEMNY](#) [MCP9843T-BEMC](#) [EMC1063-1-ACZL-TR](#) [NCT218FCT2G](#)
[O53GAB175A-160Y](#) [OH10/62,112](#) [3610085020002](#) [389049M9527](#) [TC622EAT](#) [TC6501P095VCTTR](#) [TC6501P105VCTTR](#)
[TC6501P125VCTTR](#) [MCP9802A0T-M/OT](#) [MCP9803T-M/SN](#) [MCP9843-BEST](#) [TC6501P115VCTTR](#) [TC6502P065VCTTR](#)
[ADM1023ARQZ-REEL](#) [ADM1024ARUZ-REEL](#) [ADM1032ARMZ-1RL](#) [AT30TS74-U1FMBB-T](#) [AT30TS74-U1FMAB-T](#) [AT30TS74-](#)
[U1FMCB-T](#) [AT30TS74-U1FMDB-T](#) [ADT7483AARQZ-RL](#) [ADT7481ARMZ-REEL](#) [ADT7463ARQZ-REEL](#) [MCP98243T-BEMNY](#)
[MCP98243T-BE/MC](#) [66L080-0226](#) [MAX31820MCR+T](#) [MAX1452CAEC8H](#) [DS1780E](#) [TMP05BKSZ-REEL7](#) [5962-8757103XA](#) [WTK-14-](#)
[36/N](#) [E52-CA6D-N 4M](#) [MCP98244T-BEMNY](#) [MCP9802A5T-MOT](#) [MAX6581TG9A+T](#) [DS75S-C11+T&R](#) [S-58LM20A-I4T1U](#)
[MAX6501UKP120+T](#) [MCP98243T-BE/ST](#) [AT30TS01-MAA5M-T](#) [NCT375DR2G](#) [DS18S20-SL+T&R](#)