

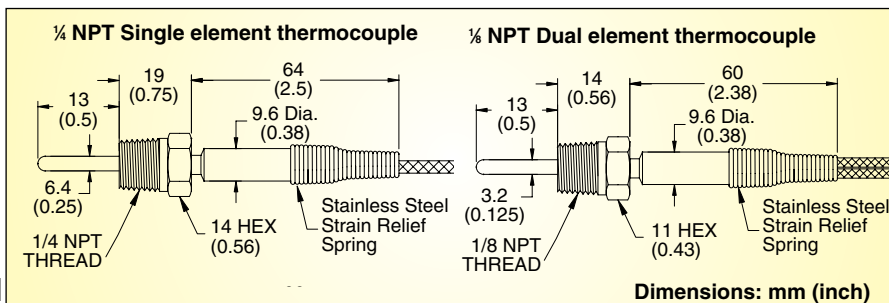


Rugged Pipe Plug Thermocouple Probe

TC-(*)-NPT Series

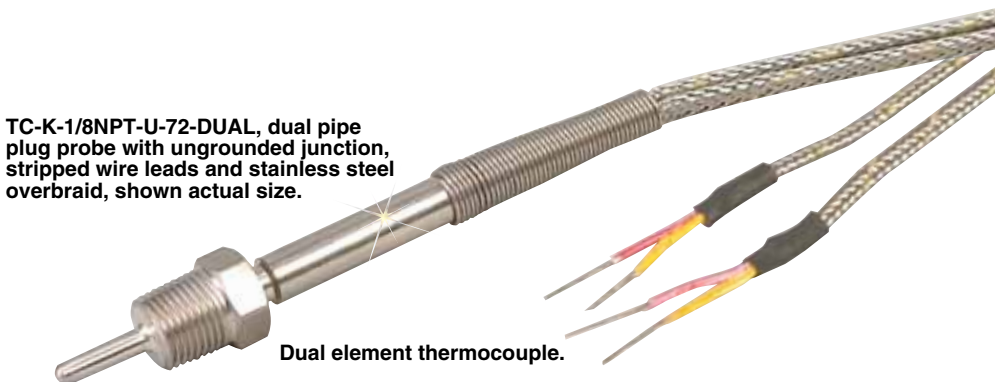

- ✓ Rugged 304 SS Design with Strain Relief Spring
- ✓ Single and Dual Elements
- ✓ ¼ or ⅛ NPT Mounting Thread
- ✓ 2 m (80") Stainless Steel Braid Over Fiberglass Lead Wire
- ✓ 20 AWG, Stranded for ¼ NPT 24 AWG, Stranded for ⅛ NPT Stainless Steel Overbraid—Resists Abrasions and Cuts, Yet Remains Flexible
- ✓ Withstands Pressures to 2500 psi at Ambient Temperatures
- ✓ Grounded and Ungrounded Junction Is Ideal For Vessel Application, Pressurized Chambers and Pipelines
- ✓ Exposed Junction Designed For Air Temperature Measurement and Monitoring of Gas Streams
- ✓ Stripped Leads Standard SMPW Connectors, Optional
- ✓ Choice J, K, T or E Thermocouple Types
- ✓ Grounded, Ungrounded or Exposed Junctions
- ✓ Special Custom Designs Having Different NPT Threads, Tip Diameters or Tip Lengths are Also Available
- ✓ Flush Tip Available, Consult Custom Engineering
- ✓ Probe Temperature Range to 650°C (1200°F)
- ✓ Transition Joint/Cable Temperature Range to 480°C (900°F)

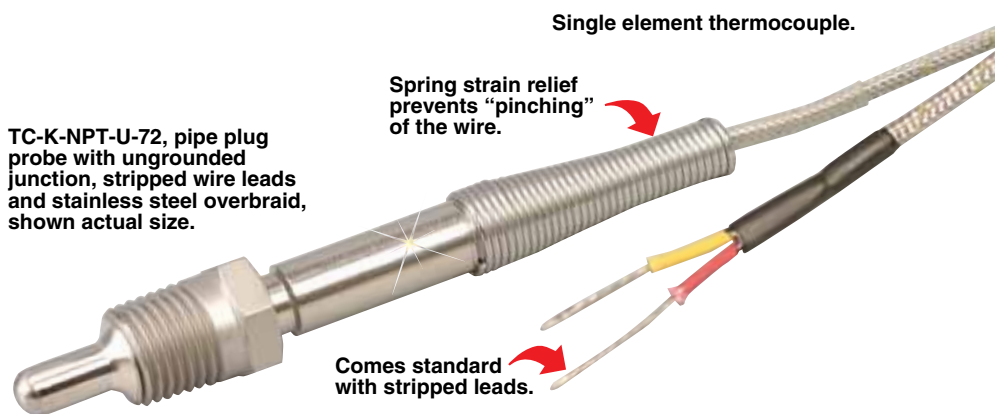

To Order	
Mounting Thread	Model No.
¼	TC-(*)-NPT-(**)-72
	TC-(*)-1/4 NPT-(**)-72-DUAL
	TC-(*)-1/4 NPT-(**)-72-SMP-DUAL
	TC-(*)-1/4 NPT-(**)-72-SMP-DUAL
⅛	TC-(*)-1/8 NPT-(**)-72
	TC-(*)-1/8 NPT-(**)-72-DUAL
	TC-(*)-1/8 NPT-(**)-72-SMP
	TC-(*)-1/8 NPT-(**)-72-SMP-DUAL

* Specify calibration: J, K, T or E.
 ** Specify junction type: G (Grounded), E (Exposed), U (Ungrounded).
 For lead wire length over 2 m (80"), use additional price per 300 mm (12") increments and modify model number.
Ordering Example: TC-K-NPT-G-72, pipe plug style, Type K grounded junction thermocouple with ¼ NPT thread and 72" long extension leads.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Other Tools](#) category:

Click to view products by [Newport](#) manufacturer:

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--698K](#) [899-2-KT46](#) [899-5-KT46](#) [CR-0AFL4--332K](#) [CR-12FP4--260R](#) [CRCW04021100FRT7](#)
[CRCW04021961FRT7](#) [5800-0090](#) [CRCW04024021FRT7](#) [CRCW040254R9FRT7](#) [CRCW0603102JRT5](#) [59065-5](#) [00-8273-RDPP](#) [00-8729-](#)
[WHPP](#) [593033](#) [593058](#) [593072](#) [593564100](#) [593575](#) [593591](#) [593593](#) [011349-000](#) [LTLA506SBLAMNBL](#) [CRCW08052740FRT1](#) [LUC-](#)
[012S070DSM](#) [LUC-018S070DSP](#) [599-2021-3-NME](#) [599-JJ-2021-03](#) [00-5080-YWPP](#) [5E4750/01-20R0-T/R](#) [LW1A-L1-GL](#) [LW1A-P1-GD](#)
[LW1L-A1C10V-GL](#) [LW1L-M1C70-A](#) [0202-0173](#) [00-9089-RDPP](#) [00-9300-RDPP](#) [CRCW2010331JR02](#) [01-1003W-8/32-10](#) [601-GP-08-](#)
[KT39](#) [601-JJ-06](#) [601-SPB](#) [601YSY](#) [602-JJ-03](#) [602SPB](#) [602Z](#) [603-JJ-07-FP](#) [603-JJY-04](#) [604J](#)