

PCB terminal block - SPTAF 1/10-5,0-IL - 1862356


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB terminal block, nominal current: 16 A, nom. voltage: 320 V, pitch: 5 mm, number of positions: 10, connection method: Push-in spring connection, mounting: Wave soldering, conductor/PCB connection direction: 45 °, color: green



Why buy this product

- Time saving push-in connection, tools not required
- Defined contact force ensures that contact remains stable over the long term
- Intuitive use through colour coded actuation lever
- Small component size for applications where space is at a premium
- Quick and convenient testing using integrated test option

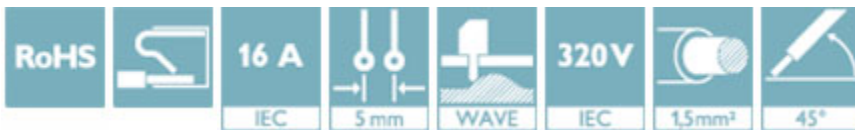

Key Commercial Data

| | |
|--------------------------------------|---------------|
| Packing unit | 1 STK |
| Minimum order quantity | 50 STK |
| GTIN | |
| GTIN | 4055626137674 |
| Weight per Piece (excluding packing) | 6.400 g |
| Custom tariff number | 85369010 |
| Country of origin | Germany |

Technical data

Dimensions

| | |
|--------------|-------|
| Length [l] | 11 mm |
| Pitch | 5 mm |
| Dimension a | 45 mm |
| Width [w] | 50 mm |

PCB terminal block - SPTAF 1/10-5,0-IL - 1862356

Technical data

Dimensions

| | |
|-----------------------|------------|
| Constructional height | 8 mm |
| Height [h] | 10.6 mm |
| Solder pin [P] | 2.6 mm |
| Pin dimensions | 0,75 x 0,3 |
| Pin spacing | 5 mm |
| Hole diameter | 1.1 mm |

General

| | |
|--|---------------------|
| Range of articles | SPTAF 1/...-IL |
| Insulating material group | I |
| Rated surge voltage (III/3) | 4 kV |
| Rated surge voltage (III/2) | 4 kV |
| Rated surge voltage (II/2) | 4 kV |
| Rated voltage (III/3) | 250 V |
| Rated voltage (III/2) | 320 V |
| Rated voltage (II/2) | 630 V |
| Connection in acc. with standard | EN-VDE |
| Nominal current I_N | 16 A |
| Nominal cross section | 1.5 mm ² |
| Maximum load current | 16 A |
| Insulating material | PA |
| Solder pin surface | Sn |
| Flammability rating according to UL 94 | V0 |
| Stripping length | 8 mm |
| Number of positions | 10 |

Connection data

| | |
|--|----------------------|
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 1.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 1.5 mm ² |
| Conductor cross section flexible, with ferrule without plastic sleeve min. | 0.25 mm ² |
| Conductor cross section flexible, with ferrule without plastic sleeve max. | 0.75 mm ² |
| Conductor cross section flexible, with ferrule with plastic sleeve min. | 0.25 mm ² |
| Conductor cross section flexible, with ferrule with plastic sleeve max. | 0.75 mm ² |
| Conductor cross section AWG min. | 24 |
| Conductor cross section AWG max. | 16 |

Standards and Regulations

PCB terminal block - SPTAF 1/10-5,0-IL - 1862356

Technical data

Standards and Regulations


| | |
|--|--------|
| Connection in acc. with standard | EN-VDE |
| Flammability rating according to UL 94 | V0 |

Environmental Product Compliance

| | |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
| | No hazardous substances above threshold values |

Drawings

Drilling diagram



Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 5.1 | 27260705 |
| eCl@ss 8.0 | 27440401 |
| eCl@ss 9.0 | 27440401 |

ETIM

| | |
|----------|----------|
| ETIM 5.0 | EC002643 |
| ETIM 6.0 | EC002643 |

UNSPSC

| | |
|-------------|----------|
| UNSPSC 13.2 | 39121432 |
|-------------|----------|

Approvals

Approvals

Approvals

cULus Recognized / VDE approval of drawings / IECCE CB Scheme

PCB terminal block - SPTAF 1/10-5,0-IL - 1862356

Approvals

Ex Approvals

Approval details

| | | | |
|--------------------------------|--|---|-----------------|
| cULus Recognized | | http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm | E60425-20061129 |
| | | B | D |
| mm ² /AWG/kcmil | | 24-16 | 24-16 |
| Nominal current I _N | | 8 A | 8 A |
| Nominal voltage U _N | | 300 V | 300 V |

| | | | |
|--------------------------------|--|---|----------|
| VDE approval of drawings | | http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx | 40047107 |
| | | | |
| mm ² /AWG/kcmil | | 0.2-1.5 | |
| Nominal current I _N | | 16 A | |
| Nominal voltage U _N | | 320 V | |

| | | | |
|--------------------------------|--|---|-----------|
| IECEE CB Scheme | | http://www.iecee.org/ | DE1-59461 |
| | | | |
| mm ² /AWG/kcmil | | 0.2-1.5 | |
| Nominal current I _N | | 16 A | |
| Nominal voltage U _N | | 320 V | |

Accessories

Accessories

Screwdriver tools

Screwdriver - SZF 0-0,4X2,5 - 1204504



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip

PCB terminal block - SPTAF 1/10-5,0-IL - 1862356

Accessories

Screwdriver - SZF 1-0,6X3,5 - 1204517



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [phoenix contact manufacturer](#):

Other Similar products are found below :

[1203259](#) [3240366](#) [1893300](#) [2800744](#) [2867076](#) [3006564](#) [2800741](#) [5146480](#) [1582539](#) [1623633](#) [1507793](#) [3025587](#) [3069708](#) [1582223](#)
[1431461](#) [1586976](#) [0311647](#) [1460160](#) [1771338](#) [3048387](#) [2814605](#) [0309086](#) [1513716](#) [3035684](#) [5451417](#) [0202219](#) [1647747](#) [1730667](#)
[1709267](#) [5449018](#) [0311634](#) [1730696](#) [3034057](#) [0311579](#) [1730683](#) [0719032](#) [5449843](#) [3240098](#) [0311566](#) [0201391](#) [CRIMPFOX 16 S](#)
[CRIMPFOX 25R](#) [CRIMPSET 25](#) [7001438](#) [ETD-BL-1T-F-300S](#) [MCR-1CLP-I-I-00](#) [MCR-4CLP-I-I-00](#) [MCR-DAC 8-I- 4-BUS](#) [FL EPA](#)
[WMS](#) [FLK 50/EZ-DR/ 400/KONFEK/S](#)