



TO ORDER, CALL 909-625-9390


**EPA-3A
SPA-3A**




**EPA-3B
SPA-3B**




**EPA-3C
SPA-3C**




**EPA-3D
SPA-3D**




**EPA-3E
SPA-3E**




**EPA-3F
SPA-3F**






SPA-3G



**EPA-3H
SPA-3H**



**EPA-3J
SPA-3J**

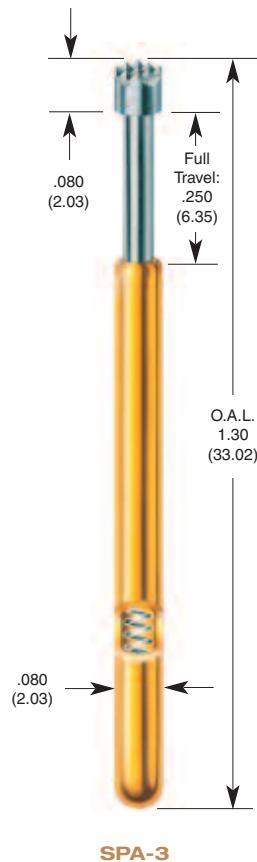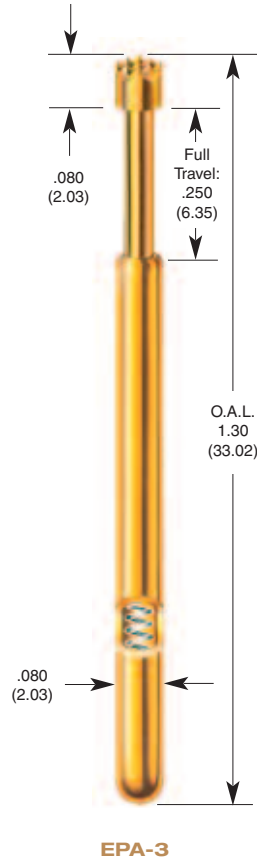

Probe Specifications EPA-3 SPA-3

Mechanical	EPA-3	SPA-3
Full Travel:	.250 (6.35)	.250 (6.35)
Recommended Working Travel:	.167 (4.24)	.167 (4.24)
Mechanical Life Exceeds:	2 x 10 ⁶ cycles	2 x 10 ⁶ cycles

Operating Temperature	EPA-3	SPA-3
Standard spring:	-55°C to +85°C	-55°C to +85°C
Alternate/Ultra High spring:	-55°C to +150°C	-55°C to +150°C
Consult factory for other temperature requirements, and applications below -40° C.		

Electrical (Static Conditions)	EPA-3	SPA-3
Current Rating:	6 amps	6 amps
Maximum continuous current, non-inductive at working travel		

Average Probe Resistance	EPA-3	SPA-3
	50 mΩ	50 mΩ

Materials and Finishes	EPA-3	SPA-3
Plunger:	Heat-treated beryllium copper, gold plated over hard nickel	Heat-treated beryllium copper, rhodium plated over hard nickel
Barrel:	Work-hardened nickel silver, gold plated over hard nickel	Work-hardened nickel silver, gold plated over hard nickel
Spring:		
Standard:	Beryllium copper, silver plated	Beryllium copper, silver plated
Alternate:	Stainless steel, silver plated	Stainless steel, silver plated
Ultra High:	Stainless steel	Stainless steel
Ball:	Brass, gold plated	Brass, gold plated

Receptacle Specifications

Mounting Hole Size:	EPA-3	SPA-3
	.094/.096 (2.39/2.44)	.094/.096 (2.39/2.44)
A #41 or 2.4 mm drill is most commonly used.		

Recommended Wire Gauge:	EPA-3	SPA-3
	22-26 AWG	22-26 AWG

Connections:	EPA-3	SPA-3
	SPR-3W Crimp or push-on termination (AMP terminal 60983-1 or equivalent)	SPR-3W Crimp or push-on termination (AMP terminal 60983-1 or equivalent)
	SPR-3W-1 Solder cup	SPR-3W-1 Solder cup
	SPR-3W-2 wire wrap/square post	SPR-3W-2 wire wrap/square post
	SPR-3Y Push-on termination (AMP terminal 42827-2 or equivalent)	SPR-3Y Push-on termination (AMP terminal 42827-2 or equivalent)


Materials and Finishes	EPA-3	SPA-3
Housing:	Work-hardened nickel silver, gold plated over hard nickel	Work-hardened nickel silver, gold plated over hard nickel
Square Post:	Phosphor bronze, gold plated	Phosphor bronze, gold plated

Spring Force in oz. (grams)


Spring Type	Preload	2/3 Travel
Standard	as shown 1.60 (45)	4.5 (126)
Alternate	-1 2.52 (71)	6.5 (184)
Ultra High	-2 4.18 (119)	11.7 (332) (SPA only)

To order, add dash number to Model Number.
 Optional spring forces and materials are available.


SPR-3W

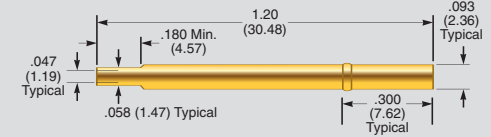


SPR-3W-1



SPR-3W-2



SPR-3Y



General Purpose Probes



Actual Size

Note: EPA tips shown for reference.

Dimensions in inches (millimeters)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [everett charles](#) manufacturer:

Other Similar products are found below :

[C-S-C](#) [P3158G-1W1S](#) [S2662A-3ED](#) [P2663G-1W1S](#) [PR261-1](#) [LFRE-25H-8](#) [P2663G-1P1S](#) [P2665G-1C1S](#) [HCP-15H](#) [EPA-5H](#) [P2662AG-1R1S](#) [P2662BG-2V1S](#) [P2757G-1C1S](#) [P2757G-1R1S](#) [P3158G-1Q1S](#) [P2447-1W](#) [P2665G-1W1S](#) [P5160G-1Q1S](#) [P5160G-3C1S](#) [P2665G-1V1S](#) [P2662AG-1C1S](#) [HPA1A](#) [P3158G-3C1S](#) [P2664G-4V1S](#) [P2757G-3W1S](#) [E-S-F](#) [EPA-4F](#) [P2663G-1V1S](#) [PR54-1](#) [HCP-14H](#) [P2662BG-1R1S](#) [GPP-95-2](#) [P2663G-1R1S](#) [HPA-0B](#) [PR80-1](#) [F-S-C](#) [P2532-1](#) [P4301-1F](#) [EPA-2H](#) [HCP-25H](#) [A-S-R](#) [PR541-1](#) [EPA-3H](#) [S2663-1ED](#) [E-S-R](#) [EPA-2A](#) [SPA3H](#) [SPR-5W](#) [SPR-2W1](#) [POGO-25J-4](#)