


- **FEATURES**
  - SUITABLE FOR TIME OF DAY CLOCK APPLICATIONS
  - LOW FREQUENCY RANGE
  - EXCELLENT FOR AUTOMATIC AND HIGH DENSITY SURFACE MOUNTING
- **SPECIFICATIONS**


NOMINAL FREQUENCY	32.768 KHz	24.00 TO 350.00 KHz	351.00 KHz TO 615.00 KHz
FREQUENCY TOLERANCE	±20 PPM MAXIMUM (±50 PPM AND ±100 PPM AVAILABLE)		
TURNOVER TEMPERATURE	±25°C ±5°C	±25°C ±8°C	±25°C ±15°C
TEMPERATURE COEFFICIENT	(-0.035 ± 0.008) PPM/ Δ °C <sup>2</sup>		
LOAD CAPACITANCE	6.0 TO 12.5 pF		
EQUIVALENT SERIES RESISTANCE (ESR)	50 K OHM MAXIMUM	50 K OHM MAXIMUM	20 K OHM MAXIMUM
DRIVE LEVEL	1.0 μW MAXIMUM		
SHUNT CAPACITANCE	1.0 pF TYPICAL	0.95 pF TYPICAL	0.9 pF TYPICAL
AGING (FIRST YEAR)	±5 PPM MAXIMUM		
OPERATING TEMPERATURE RANGE	-40°C TO +85°C		
STORAGE TEMPERATURE RANGE	-55°C TO +125°C		
SHOCK RESISTANCE	±5 PPM MAXIMUM 75 cm DROP TEST IN 3 AXES ONTO A HARD SURFACE OR 3000 g x 0.3 ms x ½ SINEWAVE IN 3 AXES		
SOLDER REFLOW CONDITIONS	230 °C MAXIMUM FOR 20 s MAXIMUM		




### ● OUTLINE DRAWINGS

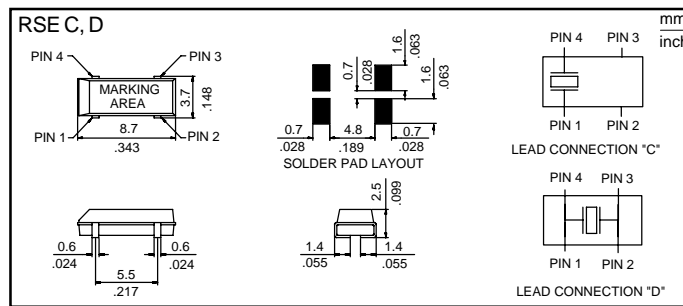


### ● REFLOW SOLDERING PROFILE

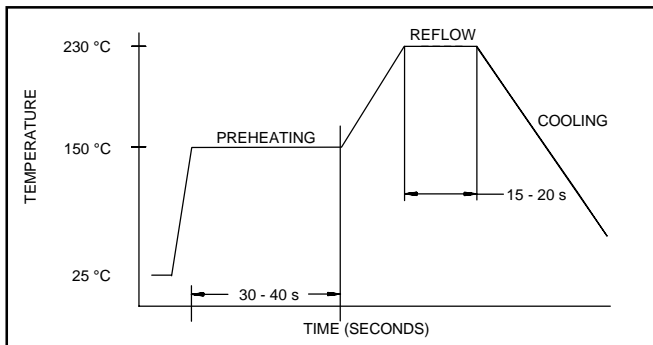

### ● CARRIER TAPE DIMENSIONS

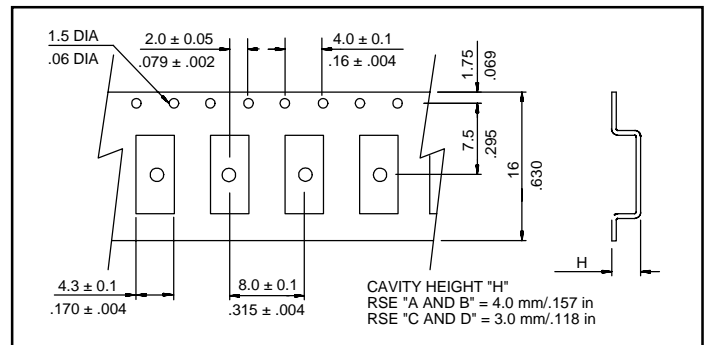

### ● FREQUENCY VS. TEMPERATURE CURVE

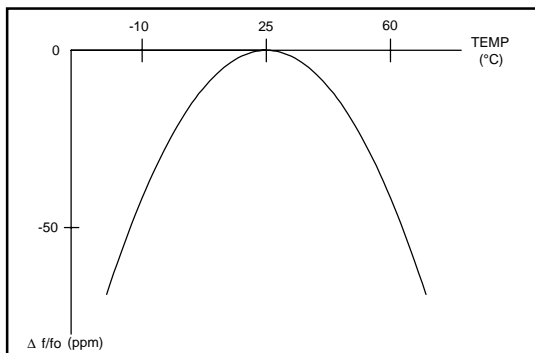

### ● PACKAGING

330mm REEL DIAMETER  
 16mm TAPE WIDTH, 8mm PITCH  
 QUANTITY: RSE A OR B 2000 PIECES PER REEL  
 RSE C OR D 3000 PIECES PER REEL

### ● PART NUMBERING SYSTEM

HOLDER TYPE	FREQUENCY	LOAD CAPACITANCE	CIRCUIT TYPE	TAPE AND REEL
RSE	IN KHz	6 OR 12.5 pF	A B C D	TR

EXAMPLE: RSE-32.768-12.5-B-TR

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [raltron](#) manufacturer:*

Other Similar products are found below :

[AS-24.576-18](#) [A-1.8432-18](#) [COM2305-25.000-EXT](#) [A-14.7456-18](#) [AS-4.000-20-SMD-TR](#) [RST-W2-P-N-E](#) [AS-27.000-18](#) [CO4605-125.000-EXT-T-TR](#) [CO2520-8.000-33-50-X](#) [CO4305-12.000-EXT](#) [AS-9.8304-18](#) [VC7250A-LZ-100](#) [RH100-10.000-18-3030-EXT](#) [H10S-25.000-18-F-3030-EXT](#) [CO4305-24.000-EXT-T-TR](#) [AS-14.31818-18](#) [H13-16.384-18-F-3030-EXT](#) [H13-24.000-18-F-3030-EXT](#) [R1612-27.120-8-F-3030-EXT](#) [RST-W1A4-17512-22M-H-001](#) [CO2016-10.000-3.3-50](#) [AS-12.000-18](#) [TU2045A-LZ-0.28-19.440-S3-3](#) [RH100-12.000-18-3030-EXT](#) [RST-MB-15338-22-G-001](#) [CO1100-32.000](#) [A-2.000-18](#) [AS-25.000-18](#) [H130B-24.000-18-3030-EXT](#) [CO43025-50.000-EXT-T-TR](#) [AS-4.000-18-SMD-TR](#) [CE8450B-LZ-125.000-T-4](#) [AS-14.31818-18-SMD](#) [A-10.000-18](#) [AS-6.000-18](#) [A-24.000-18](#) [A-11.0592-18](#) [CO1100-10.000](#) [AS-12.000-20](#) [A-7.3728-18](#) [CO12100-16.000MHZ](#) [CO1100-7.3728](#) [CO1100-24.000](#) [A-2.4576-18](#) [AS-4.000-20](#) [AS-8.000-18](#) [AS-5.000-18-EXT-SMD-TR](#) [RPA-PB0-486392-1-G-001](#) [RPC-W2-P-35-70-G](#) [AS-14.31818-20](#)