MHz RANGE CRYSTAL UNIT MINIATURE SIZE LOW PROFILE SMD


TSX-3225

Nominal frequency range
 Thickness
 Overtone order
 12 MHz to 54 MHz
 0.6mm Max.
 Fundamental

• Applications : Mobile phone, Bluetooth, W-LAN

ISM band radio, Clock for MPU

• Lead(Pb)-free : Lead free completely

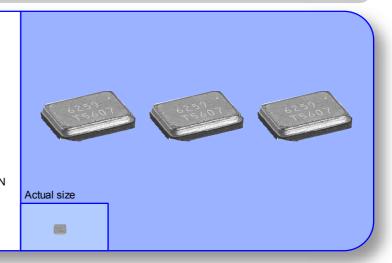



Specifications (characteristics)

Item	Symbol	Specifications	Remarks
Nominal frequency range	f	12.000 MHz to 54.000 MHz	Fundamental
Storage temperature range	T_stg	-40 °C to +85 °C	
Operating temperature range	T_use	-20 °C to +75 °C	
Level of drive	DL	100 μW Max.	
Frequency tolerance (standard)	f_tol	$\pm 10 \times 10^{-6}$	+25 °C
Frequency versus temperature characteristics (standard)	f_tem	$\pm 10\times 10^{\text{-6}}$	-20 °C to +75 °C
Load capacitance	CL	9 pF to ∞ (standard: 9 pF, 12 pF, 16 pF, ∞)	Please specify.
Motional resistance (ESR)	R1	As per below table	-20 °C to +75 °C
Frequency aging	f_age	$\pm 1 \times 10^{-6}$ / year Max.	+25 °C, First year

Motional resistance (ESR)

Frequency	Motional resistance	
12.0 MHz ≤ f < 16.0 MHz	100 Ω Max.	
16.0 MHz≤ f < 21.0 MHz	60 Ω Max.	
21.0 MHz ≤ f ≤ 54.0 MHz	40 Ω Max.	

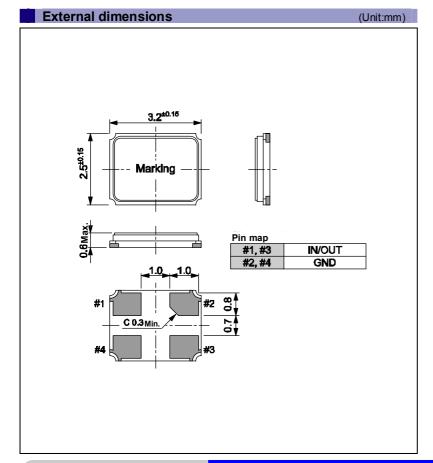

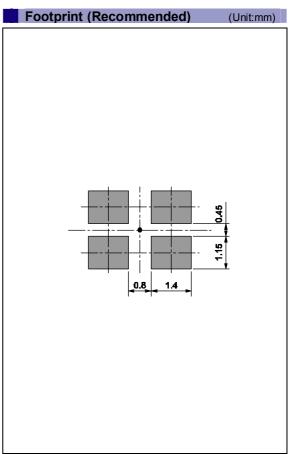

End to End EPSON TOYOCOM

The development of our ubiquitous network society has caused a diversification of applications and has increased the demand for high-level quartz devices in terms of quality, quantity, and function.

The Quartz Device Operations Division of SEIKO EPSON CORPORATION (EPSON)and TOYO COMMUNICATION EQUIPMENT CO.,LTD.(TOYOCOM) were integrated on October 1,2005 to establish a new company, EPSON TOYOCOM CORPORATION, to meet these market and customer demands.

Each company contributes its own strength; EPSON holds a strong presence in consumer products and TOYOCOM is strong in industrial products. The consolidation of these two companies in a new company that provides advanced expertise with a wide range of products for terminals and infrastructure to our

customers.

Quartz device have become crucial in the network environment where products are increasingly intended for broadband, ubiquitous applications and where various types of terminals can transfer information almost immediately via LAN and WAN on a global scale. EPSON TOYOCOM CORPORATION addresses every single aspect within a network environment. The new corporation offers "end-to-end" solutions to problems arising with products for consumer use, such as core network systems and automotive systems.

PROMOTION OF ENVIRONMENTAL MANAGEMENT SYSTEM CONFORMING INTERNATIONAL STANDARD

At EPSON TOYOCOM, all environmental initiatives operate under the Plan-Do-Check-Action(PDCA) cycle designed to achieve continuous improvements. The environmental management system (EMS) operates under the ISO 14001 environmental management standard. In May 2001, all of our major manufacturing and non-manufacturing sites, in Japan and overseas, completed the acquisition of ISO 14001 certification. In the future, new group companies will be expected to acquire the certification around the third year of operations.

ISO 14000 is an international standard for environmental management that was established by the International Standards Organization in 1996 against the background of growing concern regarding global warming, destruction of the ozone layer, and global deforestation.

WORKING FOR HIGH QUALITY

EPSON TOYOCOM quickly began working to aquire company-wide ISO 9000 series certification, and has acquired ISO 9001 or ISO 9002 certification with all targeted products manufactured in Japanese and overseas plants.

The Quartz Device Operations Division (Ina Japan, EPM and SZE) have acquired QS-9000 certification, which are of higher Level. Also QS-9000 and TS 16949 certification, which is of higher level, has been acquired.

QS-9000 is an enhanced standard for quality assurance systems formulated by leading U.S.automobile manufacturers based on the international ISO 9000 series.

ISO/TS 16949 is a global standard based on QS-9000, a severe standard corresponding to the requirements from automobile industry.

Notice

- •The material is subject to change without notice.
- Any part of this material may not be reproduced or duplicated in any form or any means without the written permission of EPSON TOYOCOM.
- The information, applied circuit, program, usage etc., written in this material is just for reference. EPSON TOYOCOM does not assume any liability for the occurrence of infringing any patent or copyright of a third party. This material does not authorize the licensing for any patent or intellectual copyrights.
- •Any product described in this material may contain technology or the subject relating to strategic products under the control of the Foreign Exchange and Foreign Trade Law of Japan and may require an export licence from the Ministry of International Trade and industry or other approval from another government agency.
- •These products are intended for general use in electronic equipment. When using them in specific applications that require extremely high reliability such as applications stated below, it is required to obtain the permission from EPSON TOYOCOM in advance.
- / Space equipment (artificial satellites, rockets, etc) / Transportation vehicles and related (automobiles, aircraft, trains, vessels, etc) / Medical instruments to sustain life / Submarine transmitters / Power stations and related / Fire work equipment and security equipment / traffic control equipment / and others requiring equivalent reliability.
- In this new crystal master for EPSON TOYOCOM, product code and marking will still remain as previously identified prior to the merger.

 Due to the on going strategy of gradual unification of part numbers, please review product code and marking as they will change during the course of the coming months.
 - We apologize for the inconvenience, but we will eventually have a unified part numbering system for Epson Toyocom which will be user friendly.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for epson manufacturer:

Other Similar products are found below:

MA-505 24.0000M-C3 ROHS MC-405 32.7680K-G3: ROHS S5U13L02P00C100 S5U13U11P00C100 SG5032CAN 10.000000M-TJGA3 SG5032VAN 200.000000M-KEGA3 SG-210STF 2.0480ML3 SG-531P 7.3728MC:ROHS X1G0044810005 SG7050CAN 10 MHZ SG-Writer-II S5U1C31W74T1300 S5U1C17W04T2100 IC Socket for 7050 case SG-210STF 40.0000ML TSX-3225 26.0000MF10Z-B6 EG-2121CA 200.0000M-LGPNB RTC-72423A S5U13513P00C100 SG-210STF 13.5600ML3 Q3851CA000055 XG-1000CA 50 MHZ EG-2121CA 644.53125MLGPA RX-8564LC:B3 PURE SN M160 MA-506 4.0000M-C3 ROHS EG-2121CA2000000M-LGPAL3 S5U13U00P00C100 FA-118T 52.0000ME12Z-AC3 S5U1C17001H3100 S5U13513R00C100 IC Socket for 5032 case FC-13A 32.7680KA-A SG-210STF 4.0960ML S5U13517P00C200 S5U13748P00C100 S5U1C17W18T2100 SG-310SCF 20.0000MM S5U13781R01C100 MA-506 25.0000M-C3:ROHS S5U1C17M13T2100 S5U1C17M13T1100 FA-238 25.0000MB50X-C3 RX-8803LC:UB3 PURE SN SG-3030LC 32.7680KB3, PURE SN SG-615P 8.0000MC3: ROHS Q3102JF010001 SG-3030JF 32.768KHZ B M150 S5U1C17W15T2100 FC-135 32.7680KA-K0 XG-2121CA 156.2500M-PGSNB FA-128 25.0000MF20X-WX