


PACKAGE DIMENSIONS inch (mm)

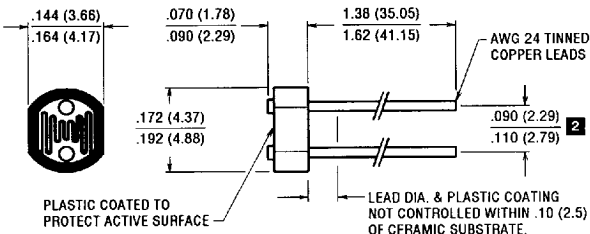


ABSOLUTE MAXIMUM RATINGS

PARAMETER	SYMBOL	RATING	UNITS
CONTINUOUS POWER DISSIPATION DERATE ABOVE 25° C	P_D $\Delta P_D / \Delta T$	80 1.6	mW mW/°C
TEMPERATURE RANGE OPERATING AND STORAGE	T_A	- 40 to +75	°C

ELECTRO-OPTICAL CHARACTERISTICS @ 25° C (16 HRS. LIGHT ADAPT, MIN.)

Part Number *	Resistance (Ohms) ³						Material Type	Sensitivity (γ , typ.) <small>LOG (R10/R100) LOG (100/10)</small>	Maximum Voltage (V, pk)	Response Time @ 1 fc (ms, typ.) ⁴	
	10 lux 2850 k			2 fc 2850 K		DARK				Rise (1-1/e)	Fall (1/e)
	Min.	Typ.	Max.	Typ.	Min.	sec.					
VT90N1	6.0 k	12 k	18 k	6.0 k	200 k	5	∅	0.80	100	78	8
VT90N2	12 k	24 k	36 k	14 k	500 k	5	∅	0.80	100	78	8
VT90N3	25 k	50 k	75 k	34 k	1.0 M	5	∅	0.85	100	78	8
VT90N4	50 k	100 k	150 k	80 k	2.0 M	5	∅	0.90	100	78	8
VT905G											
GROUP A	8.0 k	14 k	20 k	4.5 k	200 k	5	∅	0.70	100	78	8
GROUP B	14 k	25 k	36 k	7.0 k	200 k	5	∅	0.70	100	78	8
GROUP C	24 k	42 k	60 k	11.5 k	200 k	5	∅	0.70	100	78	8
VT93N1	12 k	24 k	36 k	12 k	300 k	5	3	0.90	100	35	5
VT93N2	24 k	48 k	72 k	30 k	500 k	5	3	0.90	100	35	5
VT93N3	50 k	100 k	150 k	70 k	500 k	5	3	0.90	100	35	5
VT93N4	100 k	200 k	300 k	168 k	500 k	5	3	0.90	100	35	5
VT935G											
GROUP A	10 k	18.5 k	27 k	9.3 k	1.0 M	5	3	0.90	100	35	5
GROUP B	20 k	29 k	38 k	15 k	1.0 M	5	3	0.90	100	35	5
GROUP C	31 k	40.5 k	50 k	20 k	1.0 M	5	3	0.90	100	35	5

* See page 11 for notes.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [excelitas](#) manufacturer:

Other Similar products are found below :

[PYQ1048](#) [LHI968](#) [PYQ1348](#) [LHI874](#) [VTD205H](#) [VTB9413BH](#) [VTT1225H](#) [LHI944](#) [LHI1128](#) [VTB8441BH](#) [LHI 878](#) [VTE3324LAH](#)
[VTP1220FBH](#) [VTT7125H](#) [VTB6061H](#) [VTE7173H](#) [VTE1295H](#) [VTB9412BH](#) [VTB1013H](#) [VTP1232FH](#) [VTE1291W-2H](#) [VTP4085H](#)
[VTE1291-2H](#) [VTP8651H](#) [VTD206KH](#) [VTD34FH](#) [VTD205KH](#) [VTB5041BH](#) [VTE1163H](#) [VTB5051JH](#) [VTS3082H](#) [VTB5051H](#)