



### Model Number


**V1-G-YE5M-PVC**

Cable socket, M12, 4-pin, PVC cable

### Features

- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold-plated and machined contacts
- Protection degree IP68/IP69K
- Suitable for 2-, 3- and 4-wire technology

### Dimensions

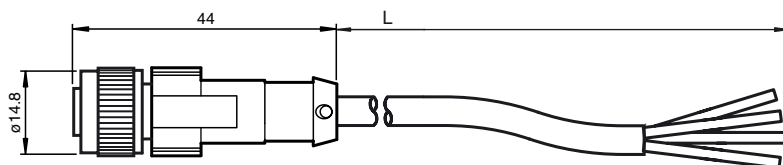

### Technical data

#### General specifications

|                     |                  |
|---------------------|------------------|
| Number of pins      | 4                |
| Connection 1        | female connector |
| Construction type 1 | straight         |
| Threading 1         | M12              |
| Connection 2        | cable end        |

#### Electrical specifications

|                   |       |                            |
|-------------------|-------|----------------------------|
| Operating voltage | $U_B$ | max. 300 V DC              |
| Test voltage      |       | > 1500 V <sub>eff</sub> AC |
| Operating current |       | max. 4 A                   |
| Volume resistance |       | < 5 m $\Omega$             |


#### Ambient conditions

|                     |  |
|---------------------|--|
| Ambient temperature | -25 ... 100 °C (-13 ... 212 °F)<br>for temperatures over 80 °C (176 °F) reduced elongation at tear |
| Pollution Degree    | 3  |

#### Mechanical specifications

|                        |  |
|------------------------|--|
| Contact elements       | spring-loaded contact socket                           |
| Pin diameter           | 1 mm   |
| Protection degree      | IP68 / IP69K   |
| Material               |  |
| Contacts               | CuSn / Au  |
| Contact surface        | Au   |
| Body                   | TPU , yellow   |
| Cable                  | PVC  |
| Slotted nut            | Diecast zinc   |
| Core isolation         | PVC  |
| Cable                  | fine-strand, flexible                                  |
| Sheath diameter        | $\varnothing$ 5.5 mm                                   |
| Bending radius         | > 10 x cable diameter, appropriate for conveyor chains |
| Color                  | yellow   |
| Cores                  | 4 x 0.34 mm <sup>2</sup>                               |
| Conductor construction | 42 x 0.1 mm  |
| Length                 | L 5 m  |

### Electrical connection



|   |       |    |
|---|-------|----|
| 1 | ..... | BN |
| 2 | ..... | WH |
| 3 | ..... | BU |
| 4 | ..... | BK |

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [pepperl & fuchs](#) manufacturer:*

Other Similar products are found below :

[6GR6221-3AB00](#) [NBN4-12GM50-E3](#) [RL31-54/73C/136](#) [52FR1](#) [NBB5-18GM50-E2](#) [NBN4-12GM50-E2](#) [NBB-12GM40-E1](#) [UC2000-30GM-IUR2-V15](#) [3RG4038-3KB00](#) [3RG7134-3AA00](#) [RL31-8-1200-RT/73C/136](#) [UC-30GM-R2](#) [UC2000-30GM-E6R2-V15](#) [ML100-55/98/103](#) [M100/MV100-RT/35/76A/95/103](#) [3RG4013-0KB00](#) [3RG4148-3CD00](#) [3RG4023-3AG33](#) [INX360D-F99-I2E2-V15](#) [MD17/73](#) [MV17/73/136](#) [NBB8-18GM50-E2-V1](#) [ACX04-F99-I-V15](#) [NBB20-L2-E2-V1](#) [REF-C110-2](#) [REF-H50](#) [REF-MH50](#) [UB400-F77-E2-V31](#) [50FY416](#) [NBN4-12GM40-Z0](#) [UB800-18GM40-I-V1](#) [3RG4013-3KB00](#) [3RG6233-3JS00](#) [ML100-55/95/103](#) [NJ2-PD-US-2.062-V93](#) [NBN8-12GM50-E2](#) [UB800-18GM40-E5-V1](#) [3RG4200-1AB00](#) [RT1 X 100](#) [3RG7120-3AA00](#) [NBB8-18GM60-A2-V1](#) [UB4000-F42-I-V15](#) [OB-150-F6-E5](#) [NBB4-12GM50-E2-V1](#) [41FR2](#) [NBB2-8GM40-E2-V1](#) [NBB20-L2-A2-V1](#) [6GR6231-3AB00](#) [6GR6222-3AB00](#) [NBB15+U1+E2](#)