



AUSTRALIAN COMPLIANCE

ACA Supplier Code: Δ N692 (A-Tick)
 Australian Standard: AS/ACIF S008:2001

MATERIAL


Jacket	PVC (Polyvinylchloride)
Insulation	PP (Polypropolyne)
Conductors	28 AWG, 7-strand copper, diameter 0.12mm per strand (with optional multi-strand nylon filler)

ELECTRICAL

Conductor Resistance	<1.34 Ω per metre
Insulation Resistance	>100M Ω per km
Withstanding Voltage	1.5KV AC RMS (each conductor to other conductors) 3.0KV AC RMS (all conductors to sheath exterior)

MECHANICAL

Plug Pull Force	50 Newtons
Terminal Crimping Strength	2KGS
Conductors	28 AWG, 7-strand copper, diameter 0.12mm per strand

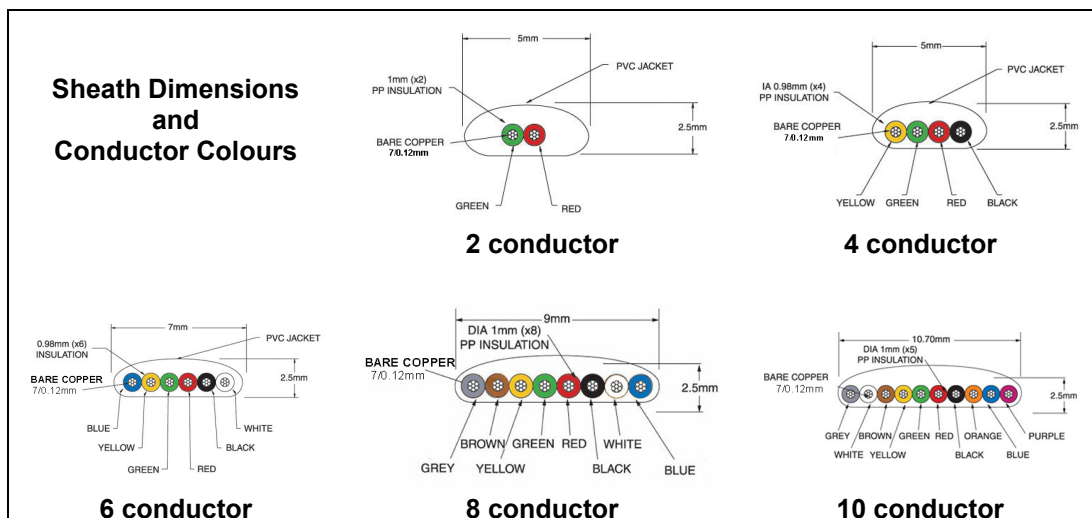

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [access communications manufacturer](#):

Other Similar products are found below :

[T1212-150](#) [Y9211](#) [K3754ORA](#) [K3744-015](#) [K37557ORA](#) [W2685RED](#) [W2652ASH](#) [W2682RED](#) [K3792](#) [K3743-050](#) [K3759](#) [K3759-005](#)
[T1210-21J](#) [P2163](#) [K3759-001](#) [K3749](#) [K3791](#) [K3745](#) [W2650BLU](#) [K3762](#) [P2210](#) [K3781](#) [K3748ORA](#) [K3750](#) [P2124](#)